

5A_{RMS} 28V VBUS Current-Sink Protection Load Switch

Features

- 3V to 32V Operating Voltage Range
- 35V Abs. Max. Rating at IN and OUT
- 5A Continuous Current Rating
 - ▶ TBDA Pulse Current Rating (duration Pd limited)
- 25mΩ typ. On-Resistance from IN to OUT
- Soft-Start (SS) Limits Inrush Current
- Over-Voltage Protection (OVP) at IN
 - ▶ 33V Internally Fixed
 - ▶ 4V to 23V External Resistor Programmable for USB PD 3.1 PPS in SPR mode
 - ▶ 15V to 31V External Resistor Programmable for USB PD 3.1 AVS in EPR mode
- “Ideal Diode” Reverse-Current Protection (RCP)
 - ▶ RCP Fast Recovery without $\overline{\text{ACOK}}$ Indication
- Supports 140W USB Power Delivery (USB PD) Revision 3.1 specification
- Short-Circuit Protection (SCP) at OUT
- Over-Current Protection (OCP)
- Over-Temperature Protection (OTP)
- Transient Voltage Suppression (TVS) at IN
 - ▶ ±100V Surge Protection (IEC61000-4-5)
 - ▶ ±8kV ESD Contact Discharge (IEC61000-4-2)
 - ▶ ±15kV ESD Air Gap Discharge (IEC61000-4-2)
- $\overline{\text{EN}}$ (KTS1898A) or EN (KTS1898B) Enable Logic
- Auto-Retry after All Faults
- $\overline{\text{ACOK}}$ Open-Drain Output Flag
- -40°C to 85°C Operating Temperature Range
- 25-bump WLCSP 2.560mm x 2.560mm (0.500mm pitch)

Brief Description

The KTS1898 is a low-resistance, high-current load switch with soft-start, over-voltage protection, “ideal diode” reverse-current protection with fast recovery, short-circuit protection, over-current protection, over-temperature protection, and integrated TVS. It is optimized to protect systems with USB Type-C PD ports and barrel connectors that sink up to 140W at 28V and must withstand up to 35V on VBUS.


Automatic reverse-current protection acts as an “ideal diode” and isolates VBUS when charging or powering the system via another port, regardless of the enable status. Soft-start limits inrush current when turning on with large capacitors at the output. The integrated TVS provides IEC industry standard ESD and ±100V surge ratings.

The KTS1898 is packaged in advanced, fully “green” compliant, 2.560mm x 2.560mm, 25-bump Wafer-Level Chip-Scale Package (WLCSP).

Applications

- Notebooks, Gaming PCs
- Mini Desktop PCs, Docking Stations, Monitors

Typical Application

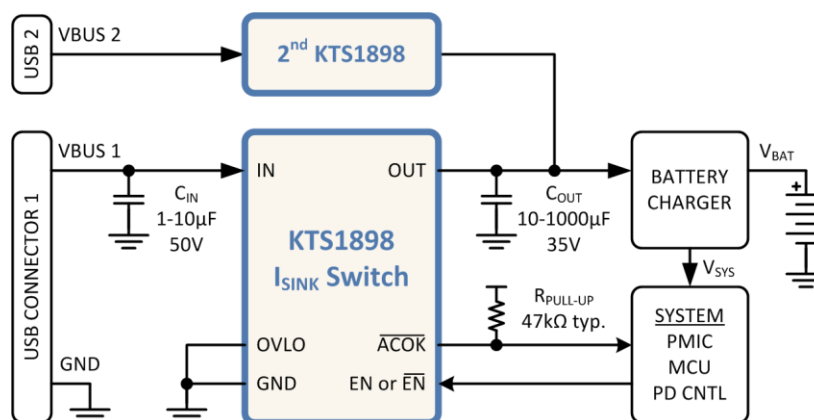


Ordering Information

Part Number	Marking ¹	Enable Polarity	Operating Temperature	Package
KTS1898AEOD-TR	__XXYYZZZZ	$\overline{\text{EN}}$	-40°C to +85°C	WLCSP-25
KTS1898BEOD-TR	SHXXYYZZZZ	EN	-40°C to +85°C	WLCSP-25

1. “XX” is the date code, “YY” is the assembly code, and “ZZZZ” is the serial number.


Packaging Information

WLCSP55-25 (2.560mm x 2.560mm x 0.550mm)

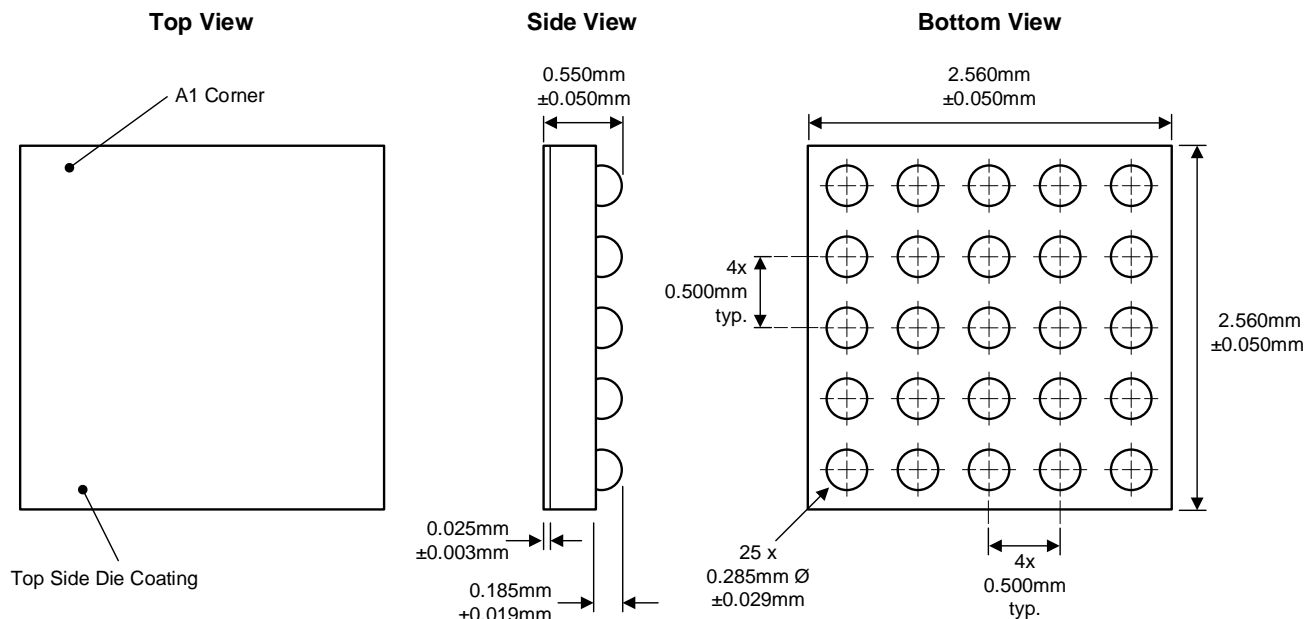

Recommended Footprint

(NSMD Pad Type)

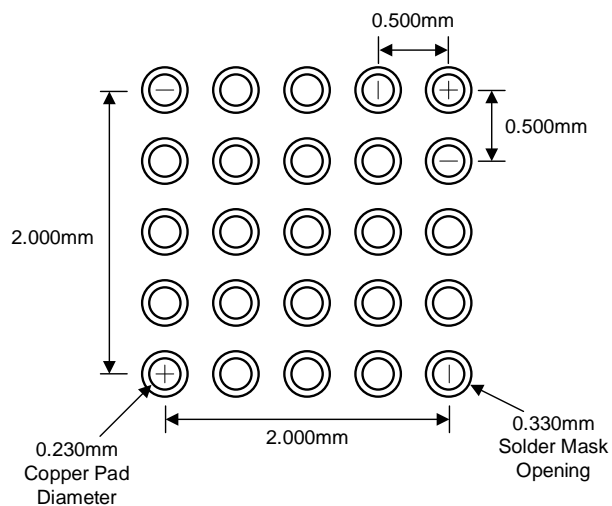

Kinetic Technologies cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Kinetic Technologies product. No intellectual property or circuit patent licenses are implied. Kinetic Technologies reserves the right to change the circuitry and specifications without notice at any time.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kinetic Technologies:](#)

[KTS1898AEOAE-TA](#)