

SMT GATE DRIVE TRANSFORMER

Ruggedized

PL1903



- 1500Vdc Isolation (380Vrms continuous)
- Basic Insulation (1.4mm creepage/clearance) and functional available
- Operating frequency: 50kHz and up
- Moisture Sensitivity Level: 3
- Lead Finish: Sn/Pb

Electrical Specifications 25°C — Operating Temperature -40°C to +130°C

Part Number	Turns Ratio (Pri:Sec ±2%)	Pri-Sec Isolation	MAX ¹ V*	Primary Inductance (uH Max)	Leakage ² Inductance (uH MAX)	DCR Primary (Ω MAX)	DCR Secondary (Ω MAX)	Package Size (L x W x H)
PL1903	1:1	1500 Vrms	17.2	980	0.75	0.88	0.62	11.8 x 8.8 x 4.0



Notes:

- For Tape & Reel Packaging, add "T" suffix at the end of the part number; i.e. PL1903T
- Add Suffix NL for RoHS compliant part; PL1903 becomes PL1903NL

Mechanical

Schematic

PL1903

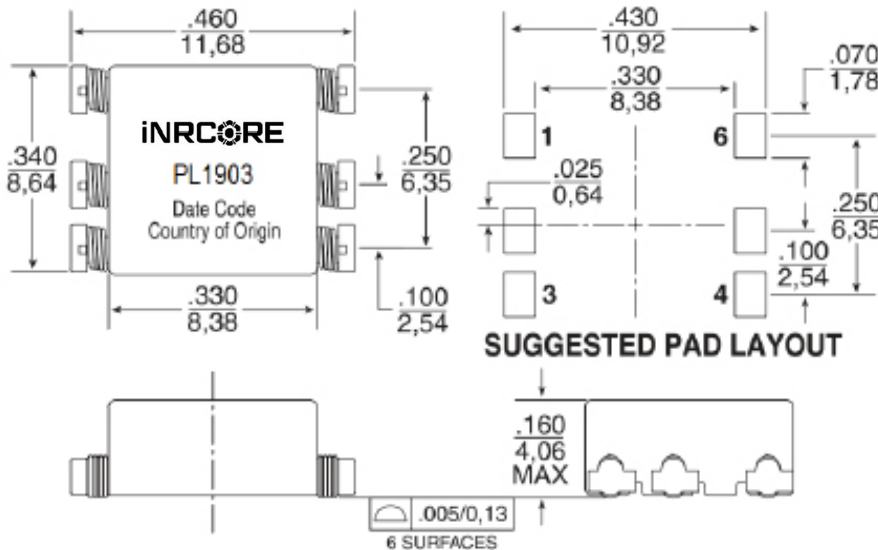


Weight0.48 grams
Tape & Reel900/reel
Tube60/tube

Dimension: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified, all tolerances are $\pm \frac{.010}{0.25}$



Tin/Lead Recommended Reflow Profile (Based on J-STD-020D)

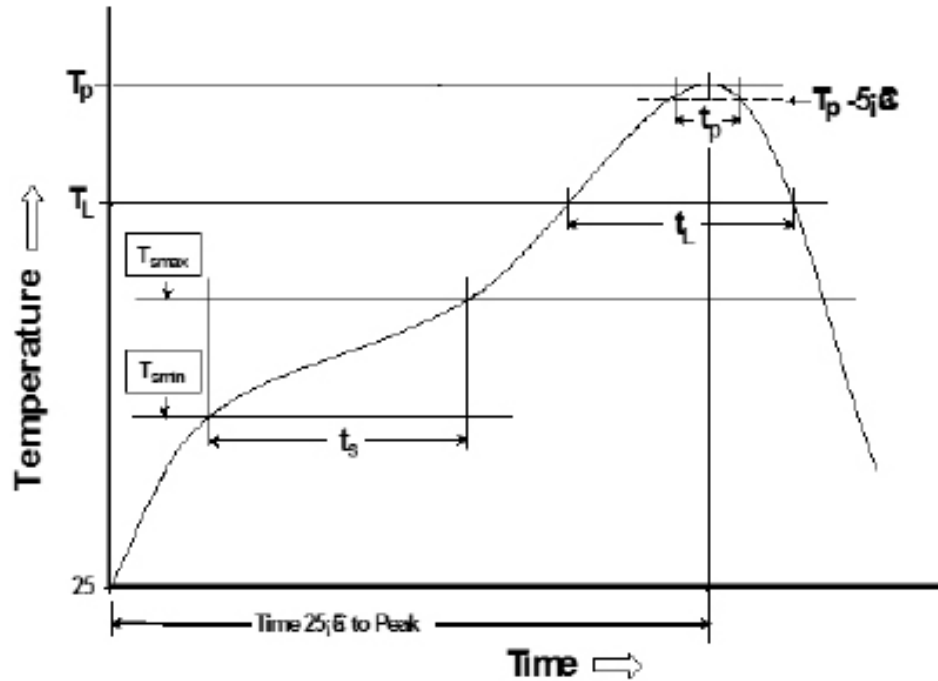

TSMIN (°C)	TSMAX (°C)	TL (°C)	TP (°C MAX)	tS (s)	tL (s)	tp (s MAX)	Ramp-up rate (TL to TP)	Ramp-down rate (TP to TL)	Time 25°C to peak temperature (s MAX)
100	150	183	225	60-120	60-150	20	3°C/s MAX	6°C/s MAX	360

Notes:

1. All temperatures measured on the package leads.
2. Maximum times of reflow cycle: 2.

For More Information

iNRCORE, LLC
311 Sinclair Road Bristol,
PA 19007-6812 U.S.A
Tel: + 1.215.781.6400
Fax: +1.215.781.6430

Global Sales Representatives and Locations:
<http://www.inrcore.com>

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2020. iNRCORE, LLC. All rights reserved.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[iNRCORE:](#)

[PL1903NL](#) [PL1903NLT](#) [PL1903T](#)