



PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			1188	MHz
Upper Frequency:	1212			MHz
Tuning Voltage:	0.5		4.5	VDC
Supply Voltage:	11.4	12.0	12.6	VDC
Output Power:	+8.0	+10.0	+12.0	dBm
Supply Current:		22	25	mA
Harmonic Suppression (2 nd Harmonic)		-20		dBc
Pushing:		1.0	2.0	MHz/V
Pulling, all Phases:		1.0	2.0	MHz pk-pk
Tuning Sensitivity:		15		MHz/V
Phase Noise @ 10kHz offset:		-104		dBc/Hz
Phase Noise @ 100kHz offset:		-124		dBc/Hz
Load Impedance:		50		Ω
Input Capacitance:			100	pF
Operating Temperature Range:	-40		+85	°C
Storage Temperature Range:	-45		+90	°C


FRONT

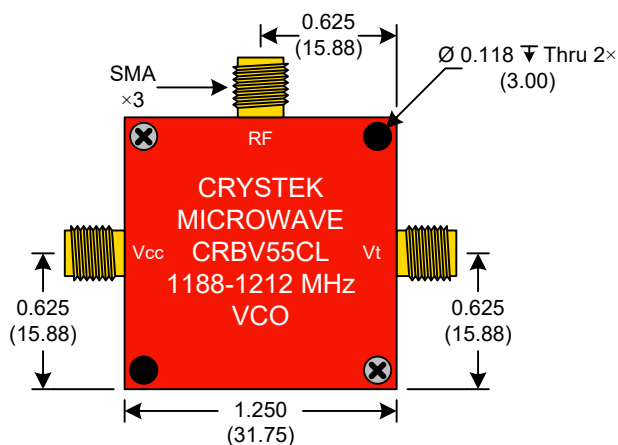

BACK

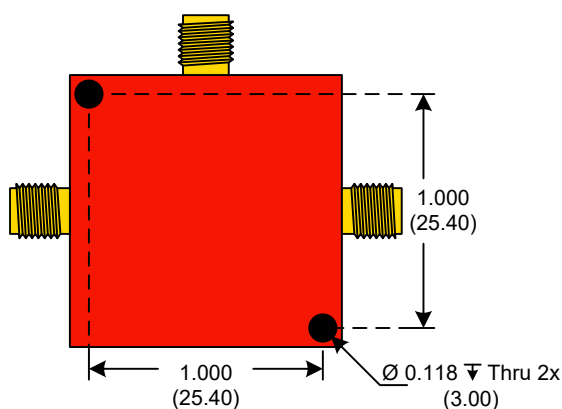

SIDE

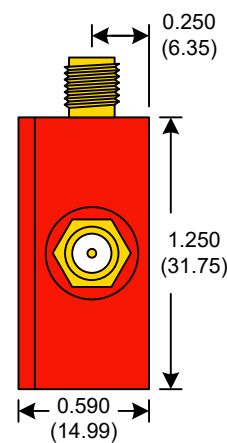


● Unless otherwise specified, Dimensions are in: $\frac{IN}{(mm)}$


Product Control:

Crystek Part Number:	CRBV55CL-1188-1212	Release Date:	17-Jan-2019
Revision Level:	F	Responsible:	C. Vales






Phase Noise (1 Hz BW, Typical)

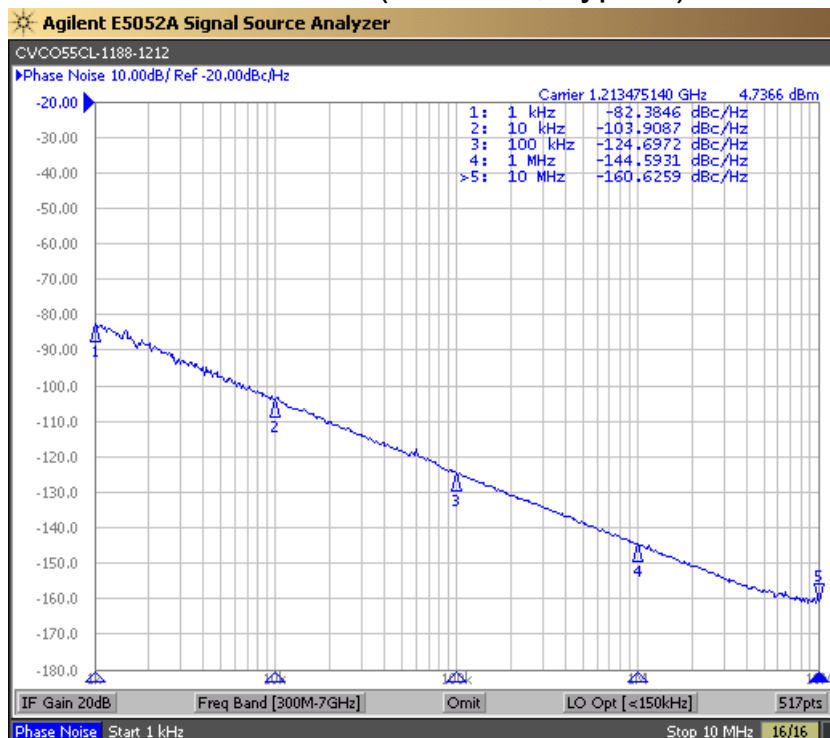

Tuning Curve (Typical)

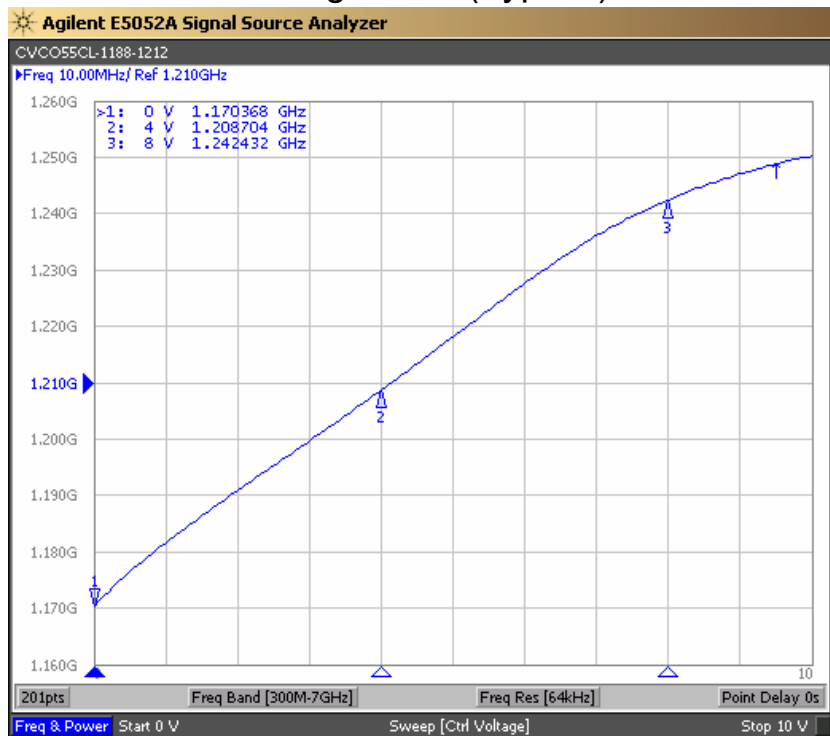

Product Control:

Crystek Part Number:	CRBV55CL-1188-1212	Release Date:	17-Jan-2019
Revision Level:	F	Responsible:	C. Vales

Specification is subject to change without notice



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Crystek:](#)

[CRBV55CL-1188-1212](#)