
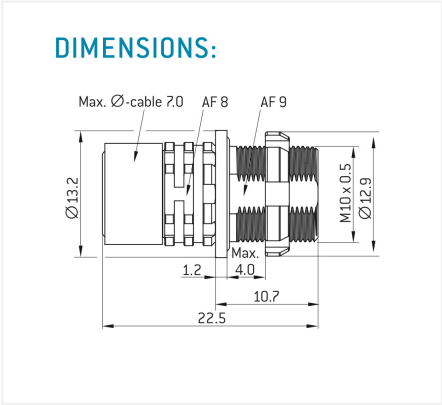
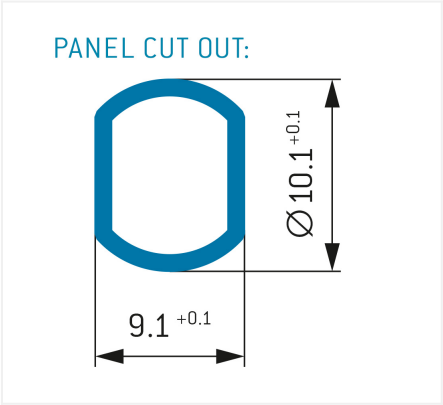


General information

Part number	GS0WAM-PD1WMM0-0000
Termination	Solder
Size	0
Locking principle	break , screw
Coding	a_key_amc
Cable Diameter	cable_amchd_0

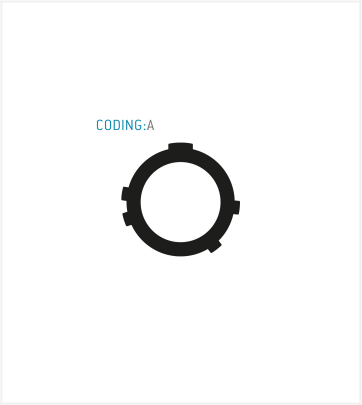

Contact insert description

Number of contacts	12
Contact type	Sockets
Contact diameter	10_03_2_07mm
Insulator material	peek
Wire cross section	22_awg_28_awg
Termination	Solder

reverse_gender_on_request

Technical information

Nominal current single contact	1_5_a	iec_60512_5_2
Test voltage	075_kv_ac	eia_364_20f

safety_text

Mechanical and environmental data

Degree of protection*	ipsk8_ip6k9k
Operating temperature	51_125_c
Mating cycles	5000

mated

Material and surface treatments

Housing	ruthenium
Contact	cu_alloy_gold

safety_text_2
ul_text
illustrative_text

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ODU:

[GS0WAM-PD1WMM0-0000](#)