
series_l, type_s2



General information

Part number	S21LCC-P03LPN0-720S	
Termination	solder	
Size	1	C ALLO
Locking principle	push	
Keying	c_key	
Cable Diameter	cable_mini_72	
Cable outlet	bend_relief	

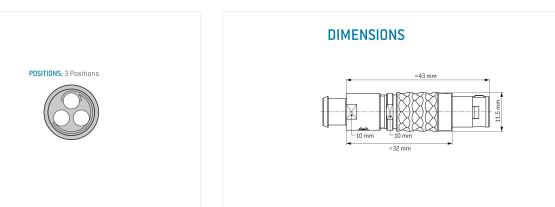

Contact insert description

Number of contacts	3
Contact type	sockets
Contact diameter	13mm
Insulator material	peek
Wire cross section	18_awg
Termination	solder
Termination diameter	14mm

reverse_gender_on_request

Technical information

Max. creepage and air clearance distance	08_mm	10_mm
Nominal current single contact	15_a	iec_60512_5_2
Nominal current insert	15 A	vde_0298_4
Test voltage	1_kv_ac	sae_13441

safety_text

Mechanical and environmental data

Degree of protection*	ip50	
Operating temperature	40_120_c	
Mating cycles	5000	
mated upmated		

mated_unmated

Material and surface treatments

Housing	m_chrome
Contact	cu_alloy_gold

safety_text_2 ul_text illustrative_text

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ODU: S21LCC-P03LPN0-720S