

1500W

The PLS1500 is a programmable DC power supply with a single 1500 Watt output. With 12-bit D/A & A/D converters embedded, the power supplies come with the capability of reporting voltage and current very accurately.

The PLS1500 series provides convenient dynamic rotary controls for voltage and current adjustment. The power supplies also come with rear ports that allow remote control via USB, Ethernet, and analog control inputs. The USB and Ethernet inputs are SCPI compliant and have LabView drivers available on the National Instruments website. The PLS1500 series is LXI certified, details for using this interface can be found in the Programming Manual. The units are designed to offer either bench use or rack mounting.

Features

- 1500W with built-in fan cooling
- Extendable voltage & current range
- 1U rack mount or bench mount
- Parallel (4 units) or series (2 units) operation (600VDC max)
- Dynamic rotary controls for Voltage & Current
- Wireless Digital Remote Sense
- Built-In Voltage and Current Measurement
- Embedded 12-bit D/A & A/D converters
- Analog interface, SCPI compliant USB 2.0 & Ethernet interfaces
- LabVIEW, IVI & USB drivers, LXI certified
- Input voltage range 90 to 265VAC
- Output voltages from 0 to 30/50/100/200/400VDC
- Overvoltage, overcurrent & overpower protection
- Self-test & calibration functions
- 0°C to +40°C operating temperature
- 3 year warranty

Models & Ratings

Model Number ⁽¹⁾	Voltage	Current	Power
PLS15003070	30V	70A	1500W
PLS15005040	50V	40A	
PLS150010020	100V	20A	
PLS150020010	200V	10A	
PLS15004005	400V	5A	

Notes:

1. PLS1500 series products are shipped without a mains lead. For mains lead please consult sales.

PROGRAMMABLE POWER SUPPLIES



Applications



Industrial
Electronics



Laboratory



Semiconductor
Manufacturing



Technology

Resource Links

[Click Here](#) for the Programming Manual

[Click Here](#) for the User Manual

Specification

Note: Unless otherwise stated, specifications are warranted over the ambient temperature range of 0 to 40°C.

		PLS15003070	PLS15005040	PLS150010020	PLS150020010	PLS15004005
DC Output Ratings ⁽¹⁾	Voltage	30V	50V	100V	200V	400V
	Current	70A	40A	20A	10A	5A
Output Ripple & Noise	CV p-p ⁽³⁾	60mV	100mV	100mV	100mV	200mV
	CV rms ⁽⁴⁾	20mV	100mV	150mV	150mV	50mV
Load Regulation (change from 10% - 90% load)	Voltage	15mV	25mV	50mV	100mV	200mV
	Current	15mA	15mA	15mA	15mA	15mA
Line Regulation (change from 100 - 132 or 180 - 260VAC input) ⁽⁶⁾	Voltage	15mV	25mV	50mV	100mV	200mV
	Current	15mA	15mA	15mA	15mA	15mA
Programming Accuracy ^(1,2)	Voltage 0.1%+	15mV	25mV	50mV	100mV	200mV
	Current 0.1%+	15mA	15mA	15mA	15mA	15mA
Measurement Accuracy	Voltage 0.1%+	15mV	25mV	50mV	100mV	200mV
	Current 0.1%+	15mA	15mA	15mA	60mA	60mA
Transient Recovery Time ⁽⁵⁾	Time	≤1ms	≤1ms	≤1ms	≤1ms	≤1ms

Supplemental Characteristics (supplemental characteristics are not warranted but are descriptions of typical performance determined either by design or type testing)

Output Response Time (time to settle to within ±1% of the rated output, with resistive load)	Up, Full Load	15ms	30ms	25ms	30ms	35ms
	Down, Full Load	25ms	25ms	25ms	45ms	40ms
	Down, No Load	<2.5s	3s	4s	10s	10s
Command Response Time ⁽⁷⁾	Time	50ms	50ms	50ms	50ms	50ms
Data Readback Transfer Time ⁽⁸⁾	Time	5ms	5ms	5ms	5ms	5ms
Remote Sense Compensation	Volts/Load Lead	1V	1V	2V	4V	4V
Over-voltage Protection	Range	0.5 - 33V	0.5 - 55V	0.5 - 110V	0.5 - 220V	0.5 - 440V
	Accuracy	0.3V	0.5V	1V	2V	14V
Output Ripple & Noise ⁽³⁾	CC r.m.s.	7mA	5mA	5mA	5mA	10mA
Programming Resolution Measurement Resolution	Voltage 0.05%+	10mV	25mV	50mV	100mV	200mV
	Current 0.05%+	20mA	20mA	10mA	5mA	2.5mA
Front Panel Display Accuracy	Voltage 0.1%+	10mV	25mV	50mV	100mV	200mV
	Current 0.1%+	33mA	20mA	10mA	5mA	2.5mA

Notes:

1. Minimum voltage is guaranteed at greater than 1% of the rated output voltage.
2. Minimum current is guaranteed at greater than 1% of the rated output current.
3. Measured with 20MHz bandwidth and excluding line frequency ripple.
4. Line frequency ripple measured with 20MHz bandwidth.
5. Time for output voltage to recover within 0.5% of its rated output for a load change from 10 to 90% of its rated output current.
6. Voltage set point from 10% to 100% of rated output up to 20MHz.
7. Add this to the output response time to obtain the total programming time.
8. Time to provide data back to the controller using LAN interface (does not include A/D conversion time).

General

Rotary controls

The digital rotary controls allow both fine and rapid adjustment of the output voltage and current. They are velocity sensitive so that a slow turn allows fine adjustment of voltage or current and rapid rotation quickly adjusts voltage or current over a large range

Precise voltage and current measurement

The PLS1500 series offers the capability to measure voltage & current accurately (read back). This capability is available from the display or the readings may be read into the controlling device

Extendable Range

The Power Supply will provide any voltage or current combination between zero & its stated maximum provided it doesn't exceed 1k5W, this allowing the user more flexibility through offering a wider range of voltages and currents

DC output terminals

PLS1500PS3070: Bus Bars (CN1)

All other models: Phoenix Contact 1709681 (CN2)

Output terminal isolation

No output terminal may be more than 600VDC from any other terminal or chassis ground

Protection

OVP Over voltage protection

OCP Over current protection

OPP Over power protection

Series and parallel capability

Up to 4 units can be connected in parallel (master/slave mode) and up to 2 units can be connected in series

Analog connection

Analog connector (CN3): See connection table

Analog programming output voltage and current

Input signal: Selectable; 0 to 3V, 0 to 5V or 0 to 10V full scale

Input impedance: 0 to 10k Ω full scale

Interfaces

USB 2.0 (CN5)

10/100 LAN (CN4)

Web server: Built-in Web server requires Internet Explorer 5+ or Firefox, or Chrome

AC input

Input connector: IEC Inlet (CN6)

Input range: 100 – 240VAC; 47 – 63Hz

Input current: 16A @ 100VAC nominal, 8A @ 200VAC nominal

Power factor: >0.95 at nominal input and rated output power

Efficiency: >85% for 1500W units at full power out

Inrush current: <35A for 1500W units

Regulatory compliance

EMC: European EMC directive 89/336/EEC for Class A products.

This ISM device complies with Canadian ICES-001

Safety: European Low Voltage Directive IEC60950-1 and IEC62368-1. US and Canadian safety standards. Any LEDs used in this product are Class 1 as per IEC 825-1

Acoustic noise declaration: Emission directive: Sound pressure L_p <75 dB(A) At operator position, normal operation, according to EN 27779 (Type Test)

Environmental conditions

Environment: Indoor use, installation category II (AC input), pollution degree 2

Operating temperature: 0°C to 40°C @ 100% load

Storage temperature: -20°C to 70°C

Operating humidity: 30% to 90% relative humidity (no condensation)

Storage humidity: 10% to 95% relative humidity (no condensation)

Altitude: Up to 3000m

Derate the output current by 2%/100m above 2000m

Derate the maximum ambient temperature by 1°C/100m above 2000m

Dimensions and weight


Dimensions: 18.9" x 15.79" x 1.73" (480.0 x 401.0 x 44.0 mm)

Excluding connectors, rotary controls and feet

Weight: 5.8kg (12.8lb)

When mounting in a 19" rack it is recommended to use side rails or a tray to support the unit

Mechanical Details

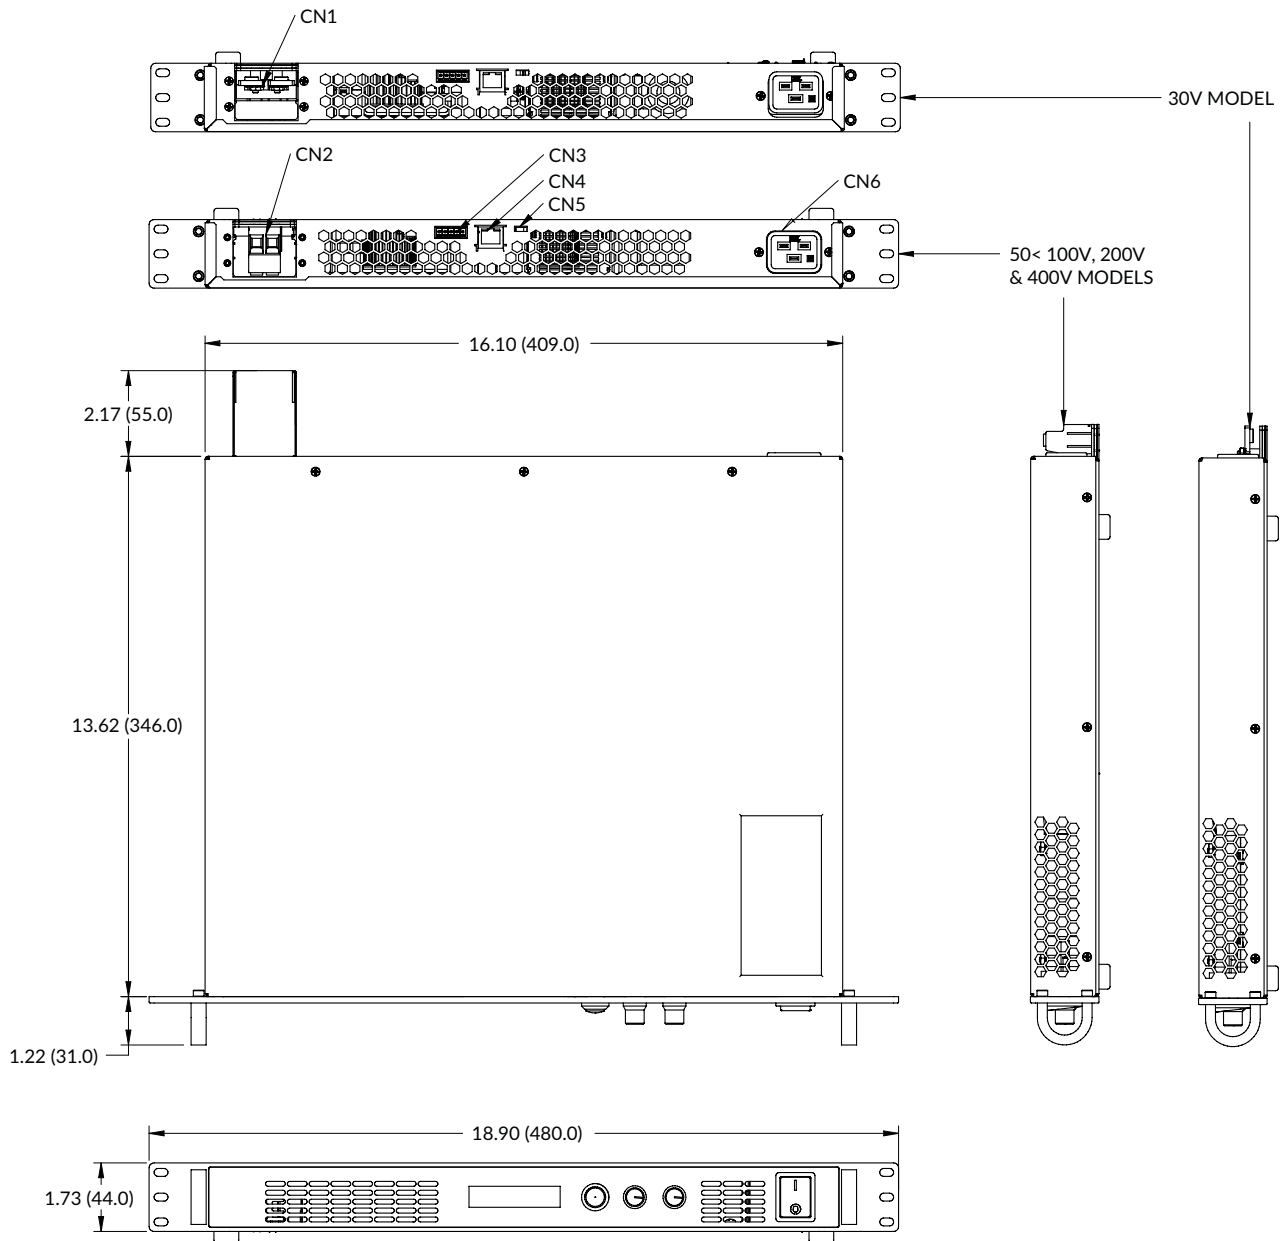

CN3 Analog Pin-Out	
Pin	Function
1	3.0V Reference
2	Ground
3	Voltage Control Input
4	Current Control Input
5	Sharing Output

Notes:

1. Dimensions are in inches (mm).
2. Unit can be used on the bench or rack mountable with no changes. If required, the feet can be removed.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[XP Power:](#)

[PLS150010020](#) [PLS150020010](#) [PLS15003070](#) [PLS15004005](#) [PLS15005040](#)