



This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.


MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

ALL METAL PARTS SILVER PLATED




Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

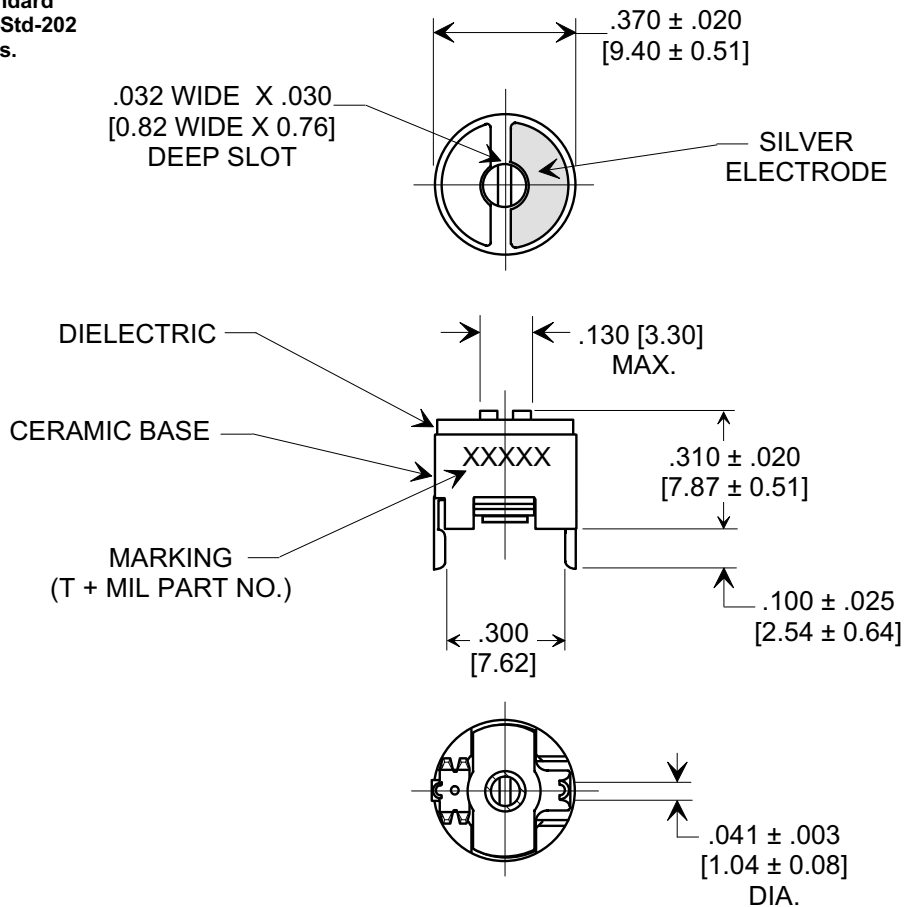

SPECIFICATIONS

TUSONIX STYLE.	538-054
Capacitance Range:	5.5 - 18 pF
Capacitance Tolerance:	MIN: +0% , MAX: -0, +50%
Temperature Characteristic:	DIELECTRIC CODE A
Working Voltage:	350 VDC AT + 85°C
Operating Temperature Range:	-55°C TO + 125°C
To MIL - C - 81/4E CV31A180	



X-2015 Rev-0

REVISION RECORD	Original Release C.O. 19990615-6-01	TOL'S IN METRIC, CIRCUIT& ORIENTATION SYMBOL ADDED L.E. 05-04-07	1	TUSONIX STYLE ADDED & MIL-C-81/4E WAS -81/4C L.E. 06-04-09	B	ECO-785	TOLERANCES unless otherwise specified		Title CERAMIC TRIMMER		
	2 PLC. DECIMAL ± 						Drawn S.M. 06-17-99	Scale 2 X			
	3 PLC. DECIMAL ± .010 [0.25]										
	ANGLES ± 						Approved H.R. 06-17-99				
							TUSONIX TUCSON, ARIZONA		A	538-054 A 5.5 - 18	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Tusonix / CTS:](#)

[0538-054-A-5.5-18](#)