

# Series 226H

## 3.9x2.9mm Compact Tactile Switch

- Surface mount J bend terminal configurations
- Compatible with IR reflow and manual soldering



### Ordering Information

Series	Terminal Type	Actuating Direction	Actuator Height “L”	Actuator Force	Packaging	Boss														
226H	J1	V	A	A	R	B														
<table><tr><th>Code</th><th>Spec.</th></tr><tr><td>J1</td><td>Surface mount J bend type1</td></tr></table>		Code	Spec.	J1	Surface mount J bend type1			<table><tr><th>Code</th><th>Spec.</th></tr><tr><td>A</td><td>160 gf</td></tr><tr><td>B</td><td>250 gf</td></tr></table>	Code	Spec.	A	160 gf	B	250 gf						
Code	Spec.																			
J1	Surface mount J bend type1																			
Code	Spec.																			
A	160 gf																			
B	250 gf																			
		<table><tr><th>Code</th><th>Spec.</th></tr><tr><td>V</td><td>Vertical</td></tr></table>	Code	Spec.	V	Vertical			<table><tr><th>Code</th><th>Spec.</th></tr><tr><td>R</td><td>Tape &amp; reel packaging</td></tr></table>	Code	Spec.	R	Tape & reel packaging							
Code	Spec.																			
V	Vertical																			
Code	Spec.																			
R	Tape & reel packaging																			
			<table><tr><th>Code</th><th>Spec.</th></tr><tr><td>A</td><td>2.0mm</td></tr><tr><td>B</td><td>2.5mm</td></tr><tr><td>C</td><td>1.5mm</td></tr></table>	Code	Spec.	A	2.0mm	B	2.5mm	C	1.5mm		<table><tr><th>Code</th><th>Spec.</th></tr><tr><td>B</td><td>With boss, only for 2.0 &amp; 2.5mm actuator height</td></tr><tr><td>Blank</td><td>No boss</td></tr></table>	Code	Spec.	B	With boss, only for 2.0 & 2.5mm actuator height	Blank	No boss	
Code	Spec.																			
A	2.0mm																			
B	2.5mm																			
C	1.5mm																			
Code	Spec.																			
B	With boss, only for 2.0 & 2.5mm actuator height																			
Blank	No boss																			

Notes: Contact CTS for other common features not listed.


## Electrical Specifications

Parameter	Conditions & Remarks	Min	Max	Unit
Contact Resistance			100	milliohms
Insulation Resistance	Between insulated terminals	100		Megohms
Dielectric Strength	1 minute between adjacent switches		250	VAC
Nonswitching Rating			50 or 12	mA or VDC

## Mechanical and Environmental

Soldering	Maximum reflow temperature, 260°C for 5 seconds Maximum manual temperature, 350°C for 3 seconds			
Actuation Life	160 gf 250 gf	200,000 100,000		cycles
RoHS	Lead-Free. Fully compliant to RoHS Directive 2011/65/EU			
Operating Force	160±50 gf 250±50 gf			
Actuator Strength	3 Kgf maximum			
Travel	0.2±0.1 mm			
Packaging	Standard tape and reel packaging			
Operating Temperature Range	-40°C to +85°C			
Storage Temperature Range	-40°C to +85°C			

## Soldering Profile

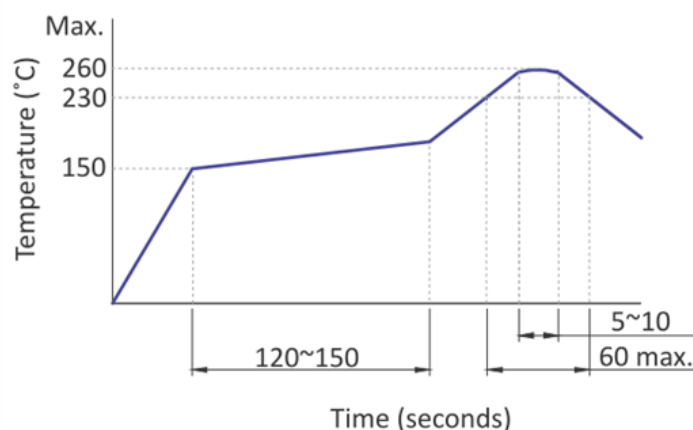

### Mechanical Specifications

Figure 1 – 226HJ1VA/B...(B), Surface Mount J Bend Type1, With Middle/Long Actuator


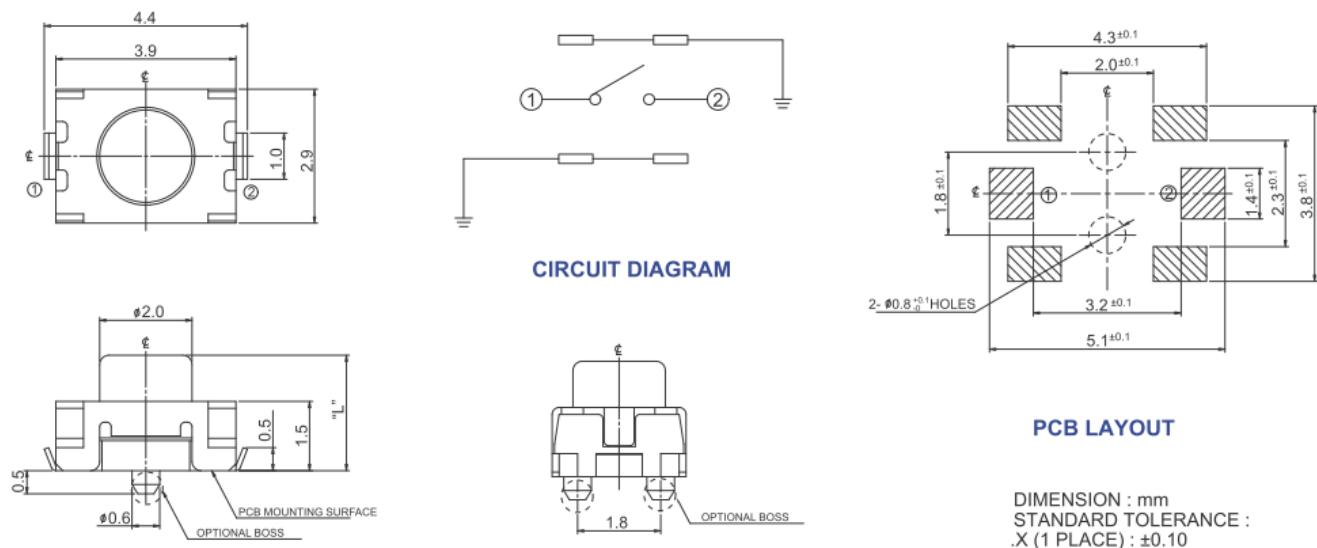


Figure 2 – 226HJ1VC..., Surface Mount J Bend Type1, With Flush Actuator

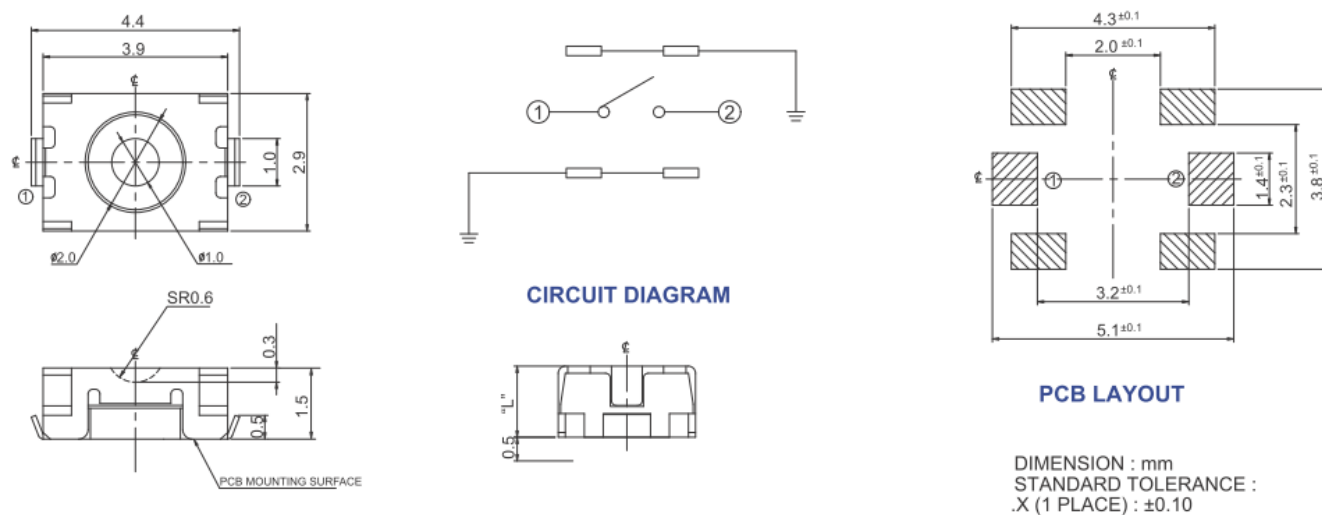


## Packing: Tape and Reel

## Surface Mount J Bend, Flush/Medium Actuator


The packing specifications :

### Structure and materials :

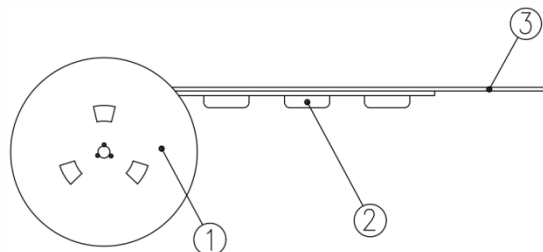

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS


1. Packing quantity : 2,500 pcs/reel
2. More than 10 empty pockets should remain at each end of the carrier tape for each reel.
3. Shortage less than 10 pcs a reel is acceptable but more than 3 consecutive empty pockets are allowed.
4. Stripping strength of cover tape is between 10 gf to 70 gf and stripping angle should be within 165°~180°.
5. The product in the pocket of carrier tape should be placed in a specified correct position.
6. Tape and reel per EIA-481.
7. D

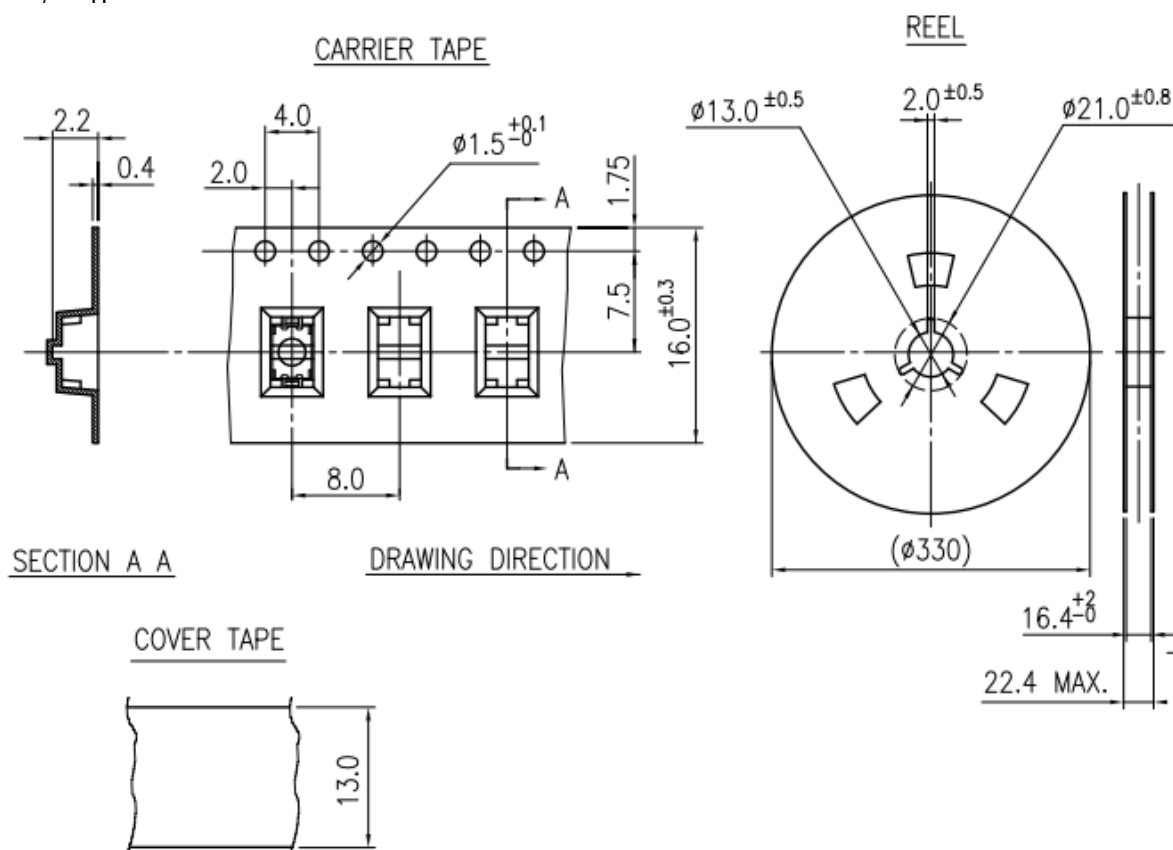

### Surface Mount J Bend, Long Actuator


The packing specifications :

Structure and materials :

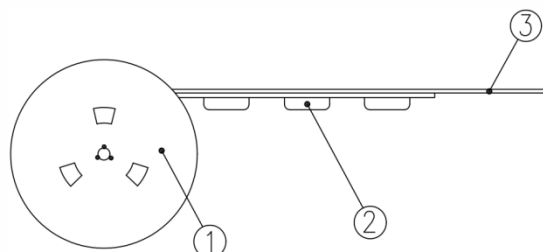

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS

1. Packing quantity : 2,300 pcs/reel
2. More than 10 empty pockets should remain at each end of the carrier tape for each reel.
3. Shortage less than 10 pcs a reel is acceptable but no more than 3 consecutive empty pockets are allowed.
4. Stripping strength of cover tape is between 10 gf to 70 gf and stripping angle should be within 165°~180°.
5. The product in the pocket of carrier tape should be placed in a specified correct position.
6. Tape and reel per EIA-481
7. Dimensions :

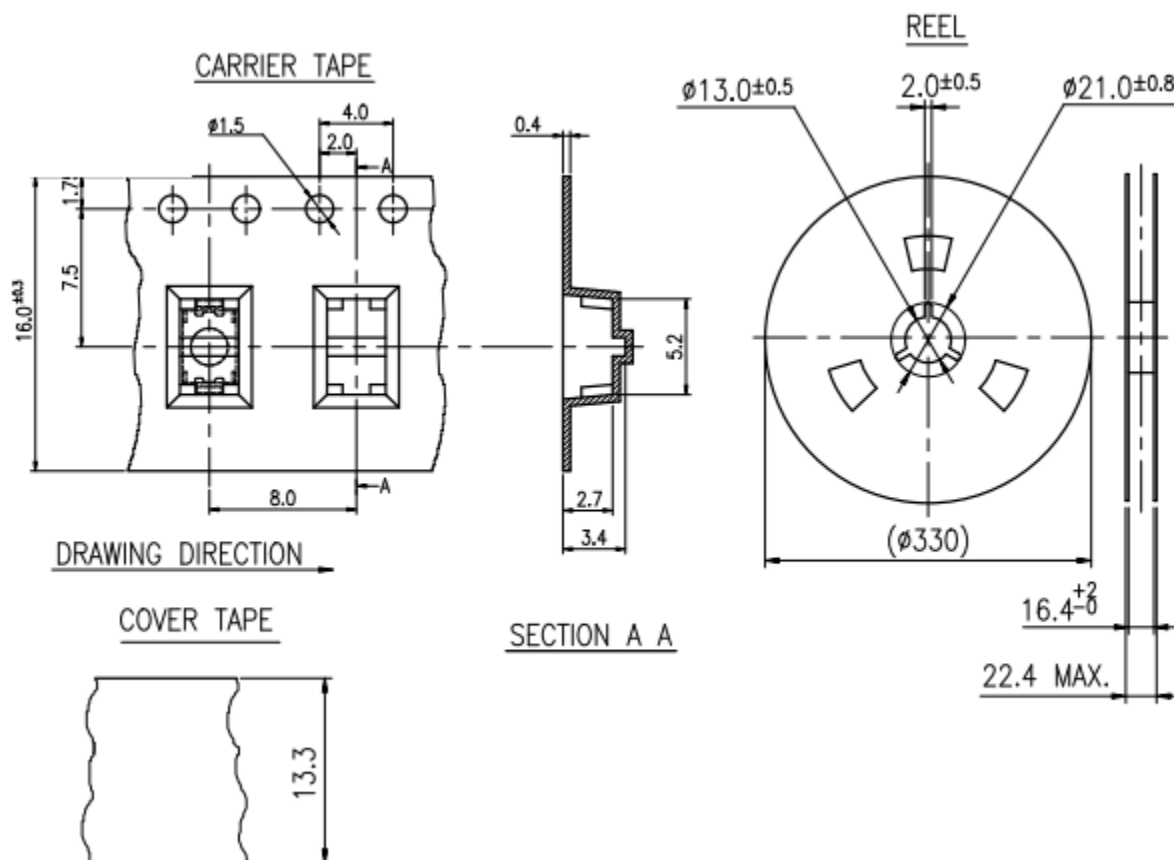

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CTS:

[226HJ1VABRB](#) [226HJ1VBAR](#) [226HJ1VBARB](#) [226HJ1VBBR](#) [226HJ1VBBRB](#) [226HJ1VCAR](#) [226HJ1VCBR](#)  
[226HJ1VAAR](#) [226HJ1VAARB](#) [226HJ1VABR](#)