
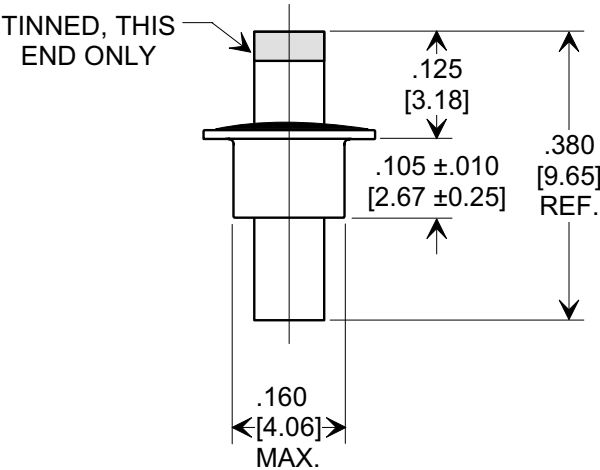
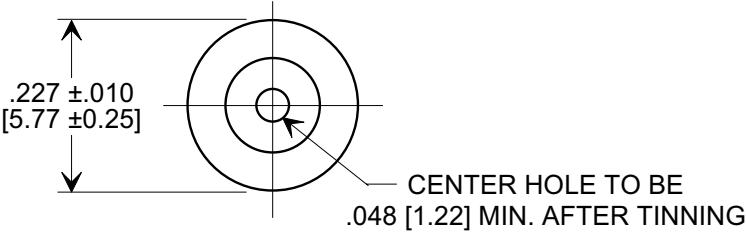




This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

Electrical Testing  
per Tusonix standard  
test plans and Mil-Std-202  
Test Methods.

MARKETING SALES DRAWING  
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING  
DIMENSIONS IN METRIC - [   ]



SPECIFICATIONS	
Capacitance:	100 pF
Tolerance:	±10%
Temp. Coef.:	X5U
Operating Temp.:	-55°C TO 85°C
Voltage Rating:	500 VDC @ + 85°C
DWV:	875 VDC
IR MIN. @ 100 VDC:	10 GΩ

REVISION RECORD	Original Release C.O.	WAS SK 8188-645.S.M. 01-23-06	0		--TOLERANCES-- Unless Otherwise Specified	Title  <b>FEED - THRU CAPACITOR</b>	
					DECIMAL ± .015 [0.38]		
					ANGLES ± 	Drawn S.M. 10-21-05	Scale 4 X
					<b>TUSONIX</b> TUCSON, ARIZONA	Approved T.C. 10-21-05	
						A	2404-699-X5U0-101K

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Tusonix / CTS:](#)

[2404-699-X5U0-101k](#)