
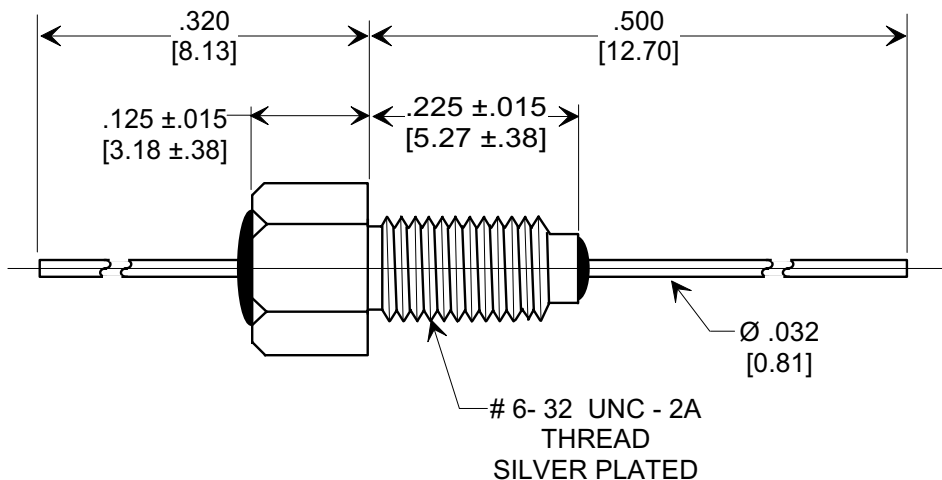
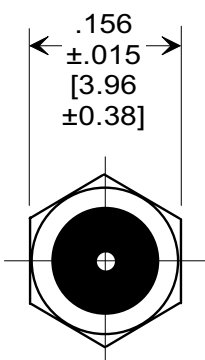





This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

MARKETING SALES DRAWING DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING DIMENSIONS IN METRIC - []




MOUNTING HARDWARE



NOTES:

1. TUSONIX STANDARD PART NUMBER: 4402-018.
TUSONIX RoHS COMPLIANT PART NUMBER: 4402-018 LF.
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
2. BUSHING: SILVER PLATED.
3. LEAD FINISH: STANDARD PART #: SOLDER PLATED. RoHS PART #: SILVER PLATED.
4. PART MARKING: TRADEMARK AND VARIATION NUMBER ON HEX FLATS. STANDARD PART: BLACK INK. RoHS PART: GREEN INK.
5. OPERATING TEMPERATURE RANGE: -55°C TO +125°C.
6. MAX. RECOMMENDED MOUNTING TORQUE: 2.0 lb.-in. [0.23 Nm].
7. MAX. RECOMMENDED SOLDERING TEMPERATURE: 260°C. SEE INSTALLATION RECOMMENDATIONS.
8. SILVER PLATED NUT AND LOCK WASHER INCLUDED.

MIN. CAP.(pf)		DC WORKING VOLTAGE	DC CURRENT (AMPS)	I.R. MIN. @ 100 (VDC)	DWV (VDC)	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220						
		125 °C				1 MHz	3 MHz	10 MHz	30 MHz	100 MHz	300 MHz	1GHz
100,000		50	10A	10 G Ω	200	22	31	40	44	47	55	65

X-2015 Rev-0	REVISION RECORD		ADDED & REVISED NOTES. ADDED IR & DWV,S.M. 03-23-06	20060310-3-10	--TOLERANCES-- Unless Otherwise Specified		Title BUSHING STYLE EMI FILTER				
	Original Release	0			DECIMAL ± .031 [0.79]						
	C.O.	941006-1			ANGLES ± 		Drawn	S.M. 10-17-94	Scale	X 5	
					TUSONIX TUCSON, ARIZONA	Approved		B.Mc. 10-17-94			
						A	4402-018				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CTS:

[4402-018](#) [4402-063](#)

Tusonix / CTS:

[4402-018LF](#)