
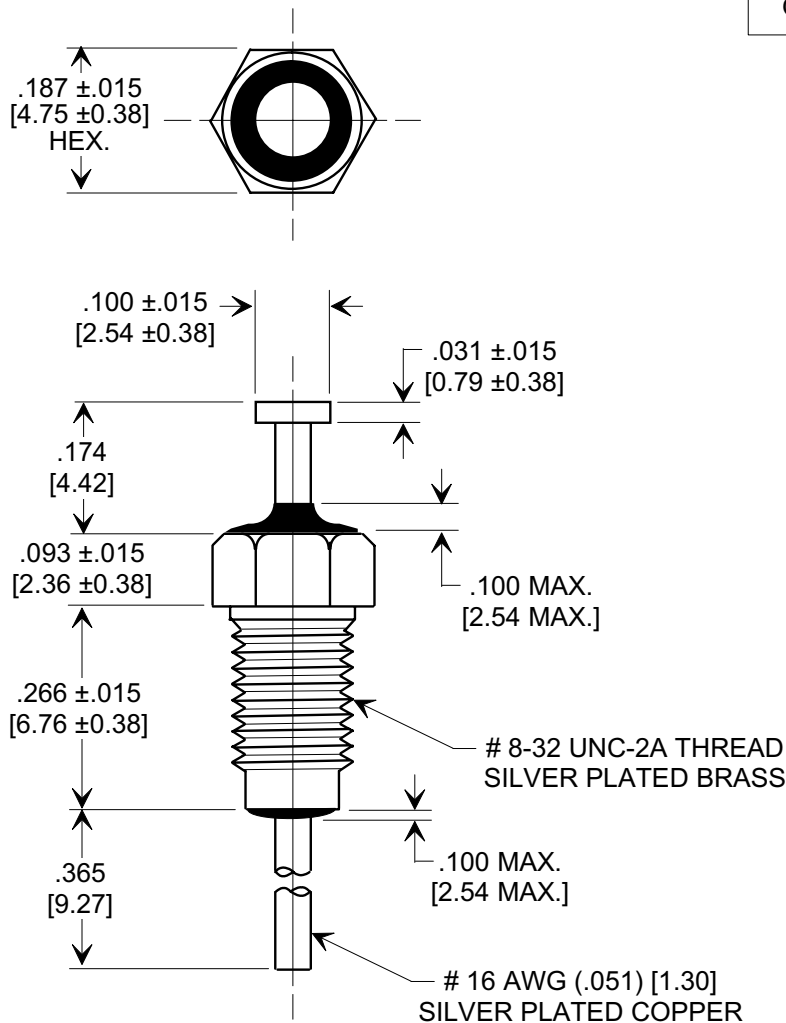


Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []




SPECIFICATIONS

Capacitance Value:	7,000 pF
Capacitance Tolerance:	+80, -20%
Temp. Characteristic:	X5W
Rating:	200 VDC @ + 85°C
Operating Range:	-55°C TO +85°C
Insulation Resistance:	10,000 megohms (min.) @ +25°C

NOTE:

1. MOUNTING TORQUE NOT TO EXCEED 5 lb-in.

<div>REVISION RECORD</div> <div>Original Release C.O. 19990608-3-01</div> <div>0</div>		<div>--TOLERANCES-- Unless Otherwise Specified</div>	<div>Title</div> <div>MINIATURE BUSHING FEED-THRU</div>	
		<div>DECIMAL ± .031</div>		
		<div>ANGLES ± </div>	<div>Drawn</div> <div>S.M. 06-09-99</div>	<div>Scale</div> <div>X 4</div>
		<div>TUSONIX</div> <div>TUCSON, ARIZONA</div>	<div>Approved</div> <div>E.F. 06-09-99</div>	<div>A</div> <div>2425-000-X5W0-702Z</div>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CTS:

[2425-000-X5W0-702Z](#)