
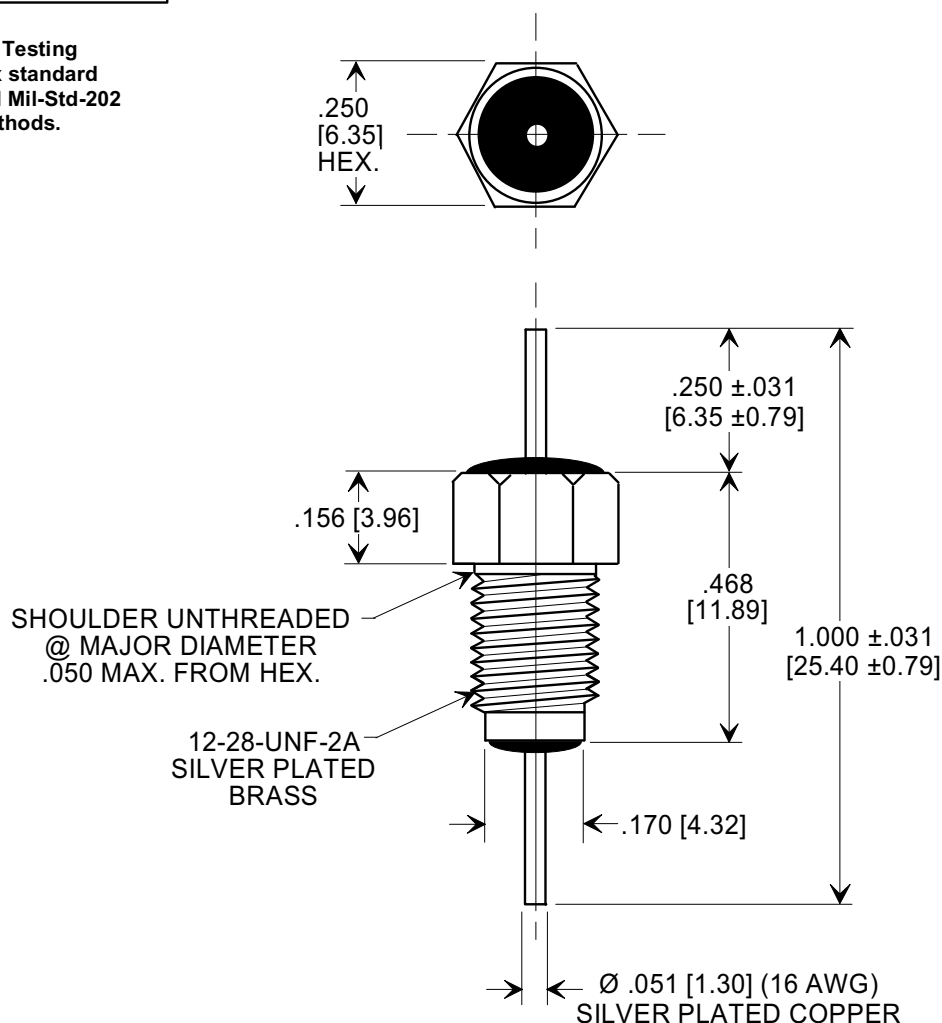



This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

MARKETING SALES DRAWING **DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING** **DIMENSIONS IN METRIC - []**



SPECIFICATIONS

TUSONIX STYLE.	2499-003
Capacitance Value:	100 pF
Capacitance Tolerance:	±20%
Temp. Characteristics:	X7R
Rating:	250 WVDC @ 125 °C
Current (A):	20
IR Min @ 100 vdc	10 GΩ
DWV	1500 VDC
Operating Range:	-55° TO + 125°C

NOTES:

- SUPPLIED WITH SILVER PLATED HEX NUT AND INTERNAL TOOTH LOCK WASHER.
- TUSONIX STANDARD PART
NUMBER: 2499-003-X7R0-101M.
TUSONIX R.o.H.S. COMPLIANT PART
NUMBER: 2499-003-X7R0-101M LF.
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
- PART MARKING: TRADEMARK, CAPACITANCE CODE AND TOLERANCE CODE STAMPED ON BUSHING HEX FLATS:
STANDARD PART: BLACK MARKING.
RoHS COMPLIANT PART: GREEN MARKING.

X-2015 Rev-0 REVISION RECORD Original Release ECO-2601	A	--TOLERANCES-- Unless Otherwise Specified	Title BUSHING TYPE FEED-THRU CAPACITOR	
			DECIMAL ± .015 [0.38]	
			ANGLES ±	
			TUSONIX TUCSON, ARIZONA	
			Drawn L.E. 01-17-12	Scale 3 X
			Approved R.L. 01-17-12	
			A	2499-003-X7R0-101M

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Tusonix / CTS:](#)

[2499-003-X7R0-101MLF](#)