
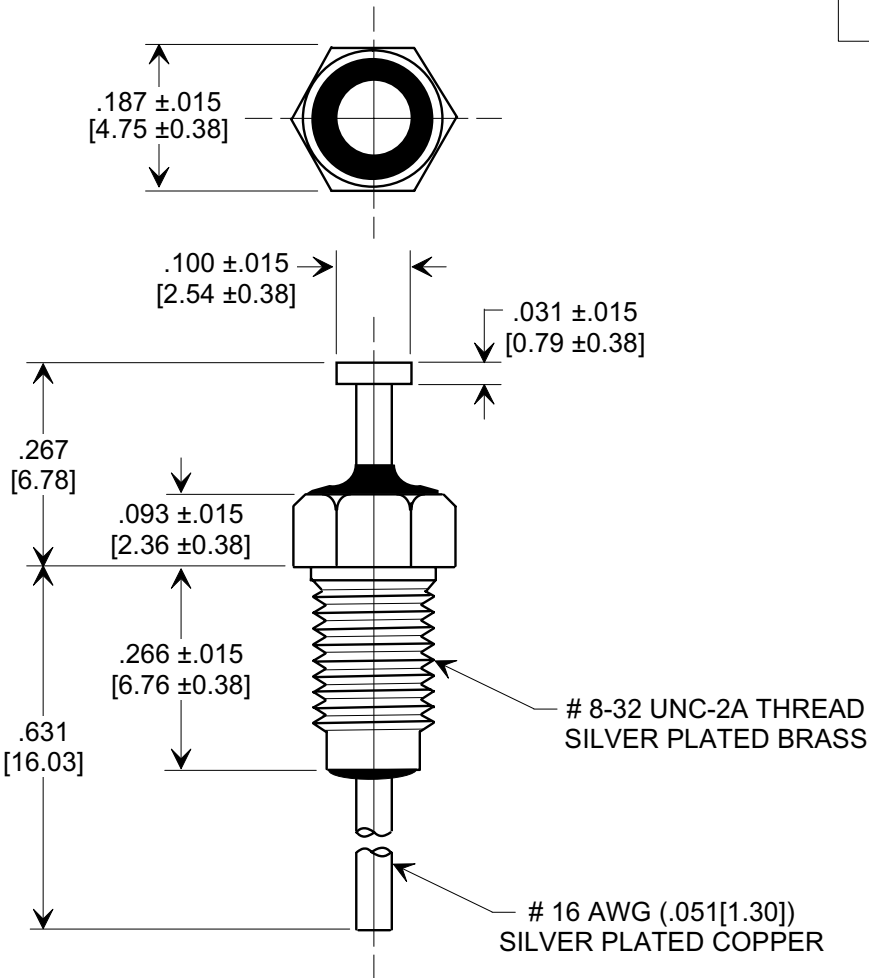



This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []



SPECIFICATIONS

Tusonix Style:	2425-001
Capacitance Value:	5000 pF
Capacitance Tolerance:	-0% +100%
Temp. Characteristic:	X7W
Rating:	200 VDC @ 85°C/100 @ 125°C
Operating Range:	-55°C TO +125°C
I.R. min. @ 100 (VDC.)	10 G
DWV (VDC)	600

NOTES:

1. SUPPLIED WITH SILVER PLATED HEX NUT.
2. MOUNTING TORQUE NOT TO EXCEED 5 lb-in. [.565 Nm].
3. TUSONIX STANDARD PART NUMBER: 2425-001-X7W0-502P. TUSONIX RoHS COMPLIANT PART NUMBER: 2425-001-X7W0-502P LF. CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
4. PART MARKING: STANDARD PART: BLACK INK FOR TRADEMARK AND CAP. CODE. RoHS PART: GREEN INK FOR TRADEMARK AND CAP. CODE.

REVISION RECORD Original Release C.O. 20080611-2-01 0			--TOLERANCES-- Unless Otherwise Specified	Title MINIATURE BUSHING FEED-THRU CAPACITOR	
			DECIMAL ± .031 [0.79]	Drawn S.M. 06-11-08	Scale 4 X
			ANGLES ±	Approved T.C. 06-11-08	
			TUSONIX TUCSON, ARIZONA	A 2425-001-X7W0-502P	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Tusonix / CTS:](#)

[2425-001-X7W0-502PLF](#)