


PRESSURE TRANSDUCERS WITH AMP.


PA-100

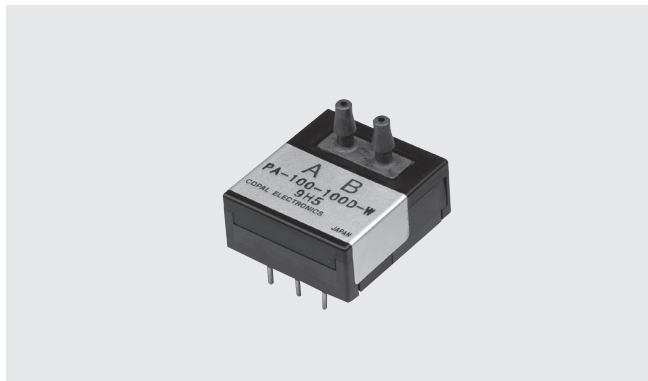

FEATURES

- Covers low pressure range
- Built-in a compact amplifier circuit
- Measures differential pressure

INTERNAL STRUCTURE



Part name		Material
①	Pressure Port	LCP (Liquid crystal polymer)
②	Sensor chip	Silicone
③	Housing	POM (Polyoxymethylene) PPS (Polyphenylene sulphide)
④	Terminal pin	Brass + Tin-plated

MODEL NUMBER DESIGNATION

PA-100-100D-S

Series name

Rated pressure range

100D-S : 0 ~ 1 kPa {102 mmHg:0}
 200D-S : 0 ~ 2 kPa {204 mmHg:0}
 500D-S : 0 ~ 5 kPa {510 mmHg:0}
 100D-W : -1 ~ 1 kPa {± 102 mmHg:0}
 200D-W : -2 ~ 2 kPa {± 204 mmHg:0}
 500D-W : -5 ~ 5 kPa {± 510 mmHg:0}

LIST OF MODEL NUMBERS

Pressure reference	Differential					
kPa Rated pressure range	0 ~ 1	0 ~ 2	0 ~ 5	-1 ~ 1	-2 ~ 2	-5 ~ 5
Model number	PA-100-100D-S	PA-100-200D-S	PA-100-500D-S	PA-100-100D-W	PA-100-200D-W	PA-100-500D-W

※ Verify the above model numbers when placing orders.

PA-100

PRESSURE TRANSDUCERS WITH AMP.

STANDARD SPECIFICATIONS

● Unless otherwise specified, the specs are defined at an ambient temperature of 25±5 °C and excitation voltage of 5 V DC.

Item			Model number	PA-100					
				100D-S	200D-S	500D-S	100D-W	200D-W	500D-W
General specifications	Pressure reference		Differential ※ 1						
	Rated pressure range		kPa	1	2	5	± 1	± 2	± 5
	Maximum pressure		kPa	5	10	25	± 5	± 10	± 25
	Break-down pressure		kPa	50					
	Line pressure		kPa	50					
	Operating temp. range		°C	- 20 ~ 70					
	Compensated temp. range		°C	0 ~ 50					
	Operating humidity		%RH	35 ~ 85 (No condensation)					
	Storage temp.		°C	- 20 ~ 80 (Atmospheric pressure, humidity 65 %RH maximum)					
	Pressure medium			Non-corrosive gases					
	Insulation resistance		MΩ minimum	100 (50 V DC)					
	Dielectric strength			50 V AC, 60 s (Leakage current 1 mA maximum)					
	Pressure port		mm	φ 2.5					
	Net weight		g	Approx. 8					
Power	Supply voltage		V DC	5 ± 10 %					
	Consumption current		maximum	5 mA					
Analog output	Output voltage		V	0.5 ~ 4.5					
	Zero voltage		※ 3 V	0.5 ± 0.08			2.5 ± 0.08		
	Span voltage		※ 3 V	4.0 ± 0.08			2.0 ± 0.08		
	Output current		mA maximum	0.5 (10 kΩ 以上 Load resistance 10 kΩ minimum)					
	Linearity/Hysteresis		%F.S.	± 0.5					
	Thermal error (Reference temp.: 25 °C)		ZERO %F.S.	± 5	± 3	± 2	± 5	± 3	± 2
			SPAN %F.S.	± 2					
	※ 2	Response		ms	5				
	Gravitational effect (From vertical position to horizontal position)		%F.S. max.	- 2	- 1	- 0.4	- 2	- 1	- 0.4

※ 1 PA-100- □□□ D-S pressure range Pressure A port – B port = 0 ~ Rated pressure range

PA-100- □□□ D-W pressure range Pressure A port – B port = – Rated pressure range ~ Rated pressure range

※ 2 Defined at 5 V of supply voltage.

※ 3 The zero and span voltages vary in proportion to the supply voltage.

PA-100

PRESSURE TRANSDUCERS WITH AMP.



ENVIRONMENTAL CHARACTERISTICS

Test item	Test conditions (At $25 \pm 5^\circ\text{C}$)	Permissible change
Vibration	10 ~ 500 Hz, 1.5 mm maximum/49 m/s ² , 3 directions for 2 hours each	Zero voltage/Span voltage: $\pm 2\%$ F.S. (100D/200D) maximum and $\pm 1\%$ F.S. (500D) each
Shock	490 m/s ² , 3 directions for 3 times each	
Pressure cycling	0 ~ Rated pressure, 10^6 cycles	
Moisture resistance	40 °C, 90 ~ 95 %RH, 240 hrs.	

OUTPUT VOLTAGE VS PRESSURE

PA-100- □□□ D-S type


PA-100- □□□ D-W type

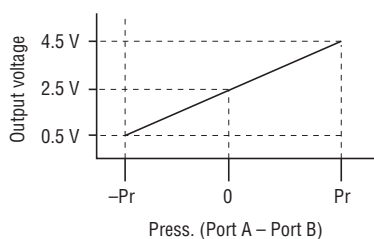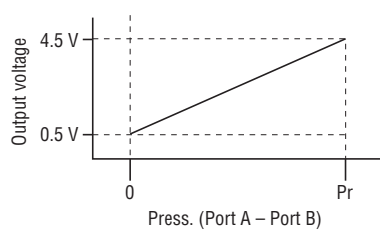


Pin	Connection
①	Power ⊕
②	Output
③	Common
④	N.C.
⑤	N.C.

OUTLINE DIMENSIONS

Unless otherwise specified, tolerance : ± 0.5 (Unit: mm)

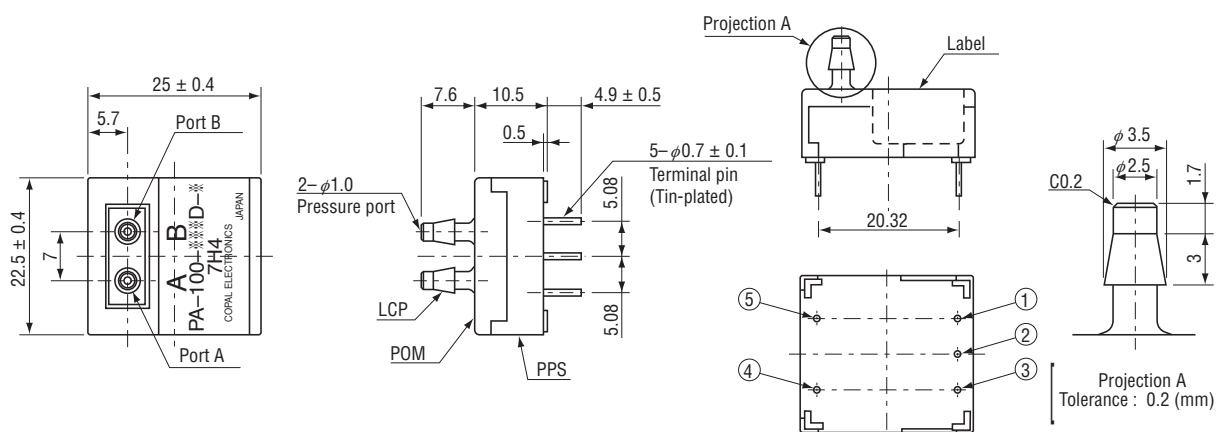

INTERNAL ELECTRICAL SCHEMATICS

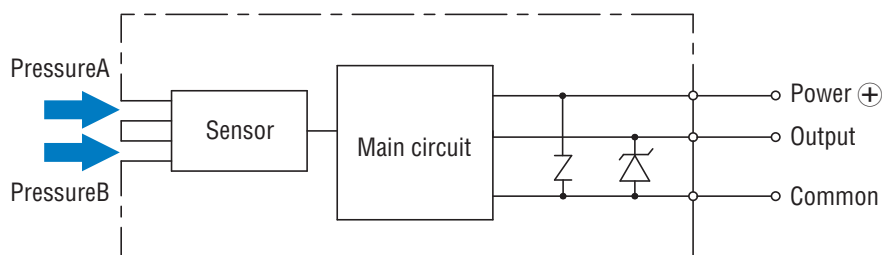

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nidec:

[PA-100-100D-S](#) [PA-100-100D-W](#) [PA-100-200D-S](#) [PA-100-200D-W](#) [PA-100-500D-S](#) [PA-100-500D-W](#)