




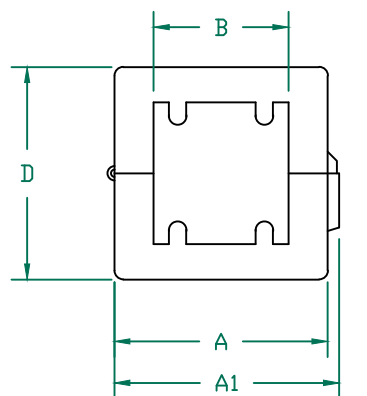

CASE



IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	71 Ω	119 Ω	231 Ω
Minimum	- Ω	96 Ω	- Ω

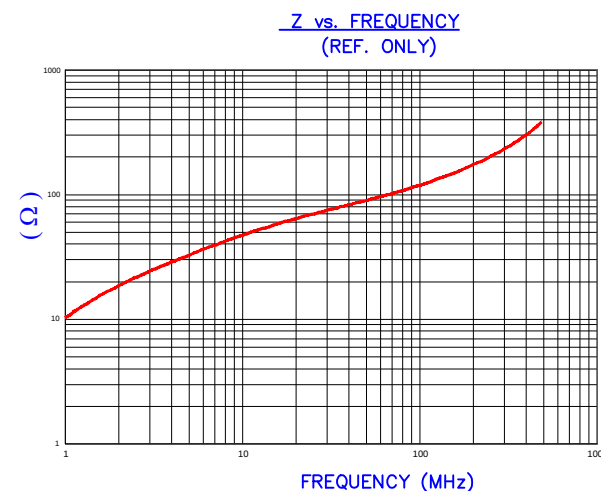

AGILENT E4991A Impedance/Material Analyzer
HP 16092A Test Fixture,

CASE DIMENSIONS (SPEC): mm [in]

A	29.20 [1.150]	+	1.00 [.039]
A1	30.80 [1.213]	+	REF.
B	20.00 [.787]	+	1.00 [.039]
C	42.00 [1.654]	+	1.00 [.039]
D	29.40 [1.157]	+	1.00 [.039]

NOTES:

1. CASE UL FLAMMABILITY RATING: 94 V-0
2. ASSEMBLED PART #: 26A5776-0A2
3. FOR CORE DIMENSIONS SEE STEWARD P/N 26A5776-000.
4. CASE COLOR: -0A2 BLACK CASE.



DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
				PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:
				26A5776-0A2	A	FERRITE CORE	WS
				DATE:	SCALE:	MATERIAL:	
				04/20/2020	NTS	FERRITE	
A	NEW RELEASE	04/20/2020	WS	CAD #	TOOL #		
REV	DESCRIPTION	DATE	INT	26A5776-0A2-A	-		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Laird Performance Materials:](#)

[26A5776-0A2](#)