
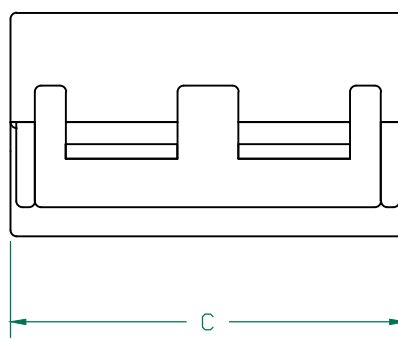


CORE DIMENSIONS:

A	18.66 [.735]	±	0.38 [.015]
B	10.16 [.400]	±	0.20 [.008]
C	28.96 [1.140]	±	0.51 [.020]
D	9.40 [.370]	±	0.19 [.007]

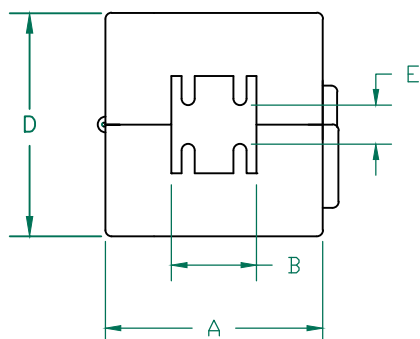


CASE DIMENSIONS:

A	22.28 [.877]	±	Ref.
B	10.00 [.394]	±	Ref.
C	32.77 [1.290]	±	Ref.
D	21.84 [.860]	±	Ref.
E	4.30 [.170]	±	Ref.

IMPEDANCE (Z)

Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	95 Ω	250 Ω	420 Ω
Minimum	- Ω	200 Ω	- Ω

Z vs. FREQUENCY (REF. ONLY)

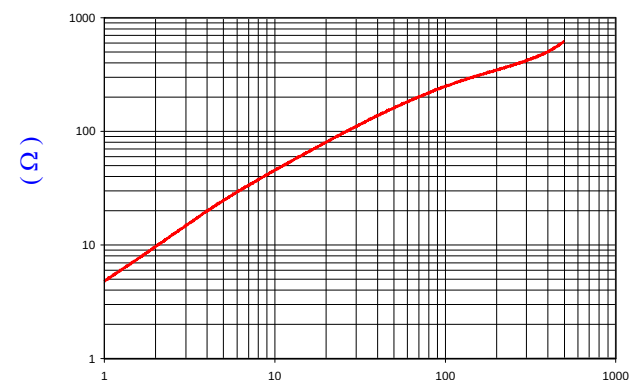

FREQUENCY (MHz)

AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture, REF #3399

NOTES:

1. ASSEMBLED PART #: 28A2029-0A2
2. CASE COLOR: BLACK - "0A2"
3. CASE FLAMMABILITY RATING: UL94 V-2.
4. CASE MATERIAL: Halogen Free Nylon

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
REV	DESCRIPTION	DATE	INT				
K	UPDATED NOTE 3	09/15/10	JUN	PROJECT/PART NUMBER: 28A2029-0A2 DATE: 09/20/04 CAD # 28A2029-0A2-K SCALE: NTS TOOL # -			
J	UPDATE COMPANY LOGO ADD NOTES 3&4	01/27/09	JRK				
H	UPDATE 100MHz MINIMUM VALUE	07/17/07	TMB				
G	UPDATE COMPANY LOGO	04/18/07	TMB				
F	UPDATE CASE DIMENSIONS A, C, & D CHANGE CASE DIM TOLERANCES TO REF	10/30/06	TMB				
E	CHANGE CASE "B" DIM TO 10.00 [.394] & TOLERANCE TO 0.51 [.020]	07/07/06	TMB	REV K DRAWN BY: JRK MATERIAL: FERRITE			
REV	DESCRIPTION	DATE	INT				



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Laird Performance Materials:](#)

[28A2029-0A2](#)