

NOTES:

- 1.0 PACKAGING: PARTS PACKED AND SEALED IN PLASTIC BAGS.
2.0 IDENTIFICATION: MARK EACH BAG WITH PART NO., QUANTITY,
DATE CODE AND I.S. FED. IDENT. NO.

CATALOG STANDARDS


DWG. NO.	8516-0000-00
ECD-E250 ADDED TABLE TO PRINT DCS 05/27/98 EWS 05/28/98	04
ECD-E2027 DELETED ECE MATERIAL. ADDED AVAILABLE CATALOG MATERIALS. RKM 12/07/00 DJC 12/08/00	05

AN CONNECTOR GASKET PER MIL-C-5015 MS3102					
ITEM	DIM "A"	DIM "B"	DIM "C"	DIM "D"	SHELL SIZE
-0101-	.594	.500	.875	.172	8
-0102-	.719	.625	1.000	.172	10
-0103-	.813	.750	1.094	.172	12
-0104-	.906	.875	1.188	.172	14
-0105-	.969	1.000	1.281	.172	16
-0106-	1.063	1.125	1.375	.203	18
-0107-	1.156	1.250	1.500	.203	20
-0108-	1.250	1.375	1.625	.203	22
-0109-	1.375	1.500	1.750	.203	24
-0110-	1.563	1.750	2.000	.203	28
-0111-	1.750	2.000	2.250	.219	32
-0112-	1.938	2.188	2.500	.219	36
-0113-	1.938	2.188	2.500	.219	37
-0114-	2.188	2.438	2.750	.219	40
-0115-	2.375	2.781	3.000	.219	44
-0116-	2.625	3.031	3.250	.219	48

PT, PC, AND JT CONNECTOR GASKET PER MIL-C-26482 MS3110,3112,2119,3120					
ITEM	DIM "A"	DIM "B"	DIM "C"	DIM "D"	SHELL SIZE
-0117-	.469	.375	.688	.130	6
-0118-	.594	.500	.812	.130	8
-0119-	.719	.625	.938	.130	10
-0120-	.813	.750	1.031	.130	12
-0121-	.906	.875	1.125	.130	14
-0122-	.969	1.000	1.219	.130	16
-0123-	1.063	1.125	1.312	.130	18
-0124-	1.156	1.250	1.438	.130	20
-0125-	1.250	1.375	1.563	.130	22
-0126-	1.375	1.500	1.688	.130	24

GASKETS FOR BENDIX SP CONNECTORS					
ITEM	DIM "A"	DIM "B"	DIM "C"	DIM "D"	SHELL SIZE
-0127-	.641	.375	.963	.160	6
-0128-	.734	.500	1.047	.160	8
-0129-	.812	.625	1.125	.160	10
-0130-	.938	.750	1.250	.160	12
-0131-	1.031	.875	1.344	.160	14
-0132-	1.125	1.000	1.437	.160	16
-0133-	1.203	1.125	1.516	.160	18
-0134-	1.297	1.250	1.672	.160	20
-0135-	1.375	1.375	1.750	.160	22

RF CONNECTORS					
ITEM	DIM "A"	DIM "B"	DIM "C"	DIM "D"	SHELL SIZE
-0136-	.500	.437	.687	.109	BN
-0137-	.500	.437	.687	.109	BNC
-0138-	.719	.625	1.000	.172	C
-0139-	.906	.750	1.188	.140	HN
-0140-	1.437	1.250	2.000	.257	LC
-0141-	.719	.625	1.000	.172	N
-0142-	.969	1.000	1.281	.172	UHF

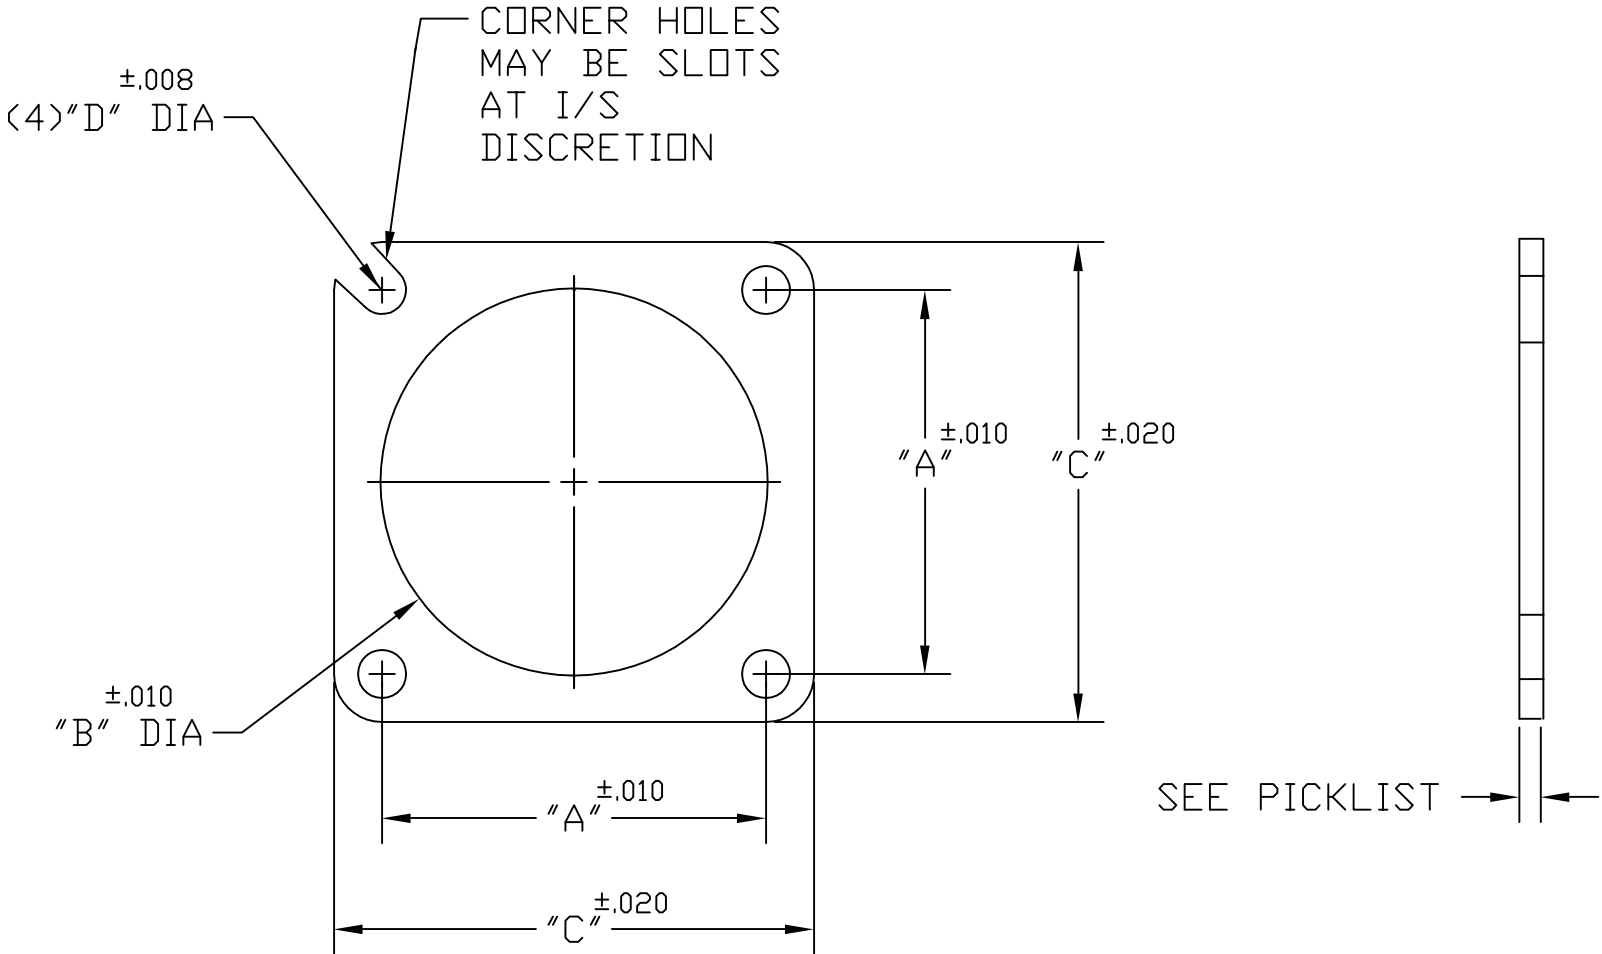

CATALOG STANDARDS

MATERIAL			COLOR	CODE
⑤	ORIENTED ALUMINUM WIRES/SOLID SILICONE		GRAY	59
⑤	ORIENTED ALUMINUM WIRES/SILICONE SPONGE		GRAY	58
	WOVEN ALUMINUM WIRES IN NEOPRENE		BLACK	57
	ORIENTED MONEL WIRES IN SOLID SILICONE		GRAY	56
⑤	ALLOY 304 SINTERED STAINLESS STEEL		N/A	46
⑤	EXPANDED ALUMINUM ALLOY PER QQ-A-250		N/A	43
⑤	EXPANDED MONEL METAL PER QQ-N-281B		N/A	42
	WOVEN ALUMINUM WIRE IN SOLID SILICONE		GRAY	23
⑤	EXPANDED MONEL SILICONE IMPREGNATED		GRAY	22
⑤	EXPANDED ALUMINUM SILICONE IMPREGNATED		GRAY	21

 DELAWARE WATER GAP PENNSYLVANIA	THIRD ANGLE PROJECTION		TOLERANCES NOT SHOWN	DRAWN BY DCS 05/26/98	ELECTRO SHIELD	
	UNITS: INCH [MM]	SCALE: NTS	DECIMAL 2 PL'S ± .015	CHECKED BY RKM 05/27/98	CONNECTOR GASKET	
			DECIMAL 3 PL'S ± .010	APPROVED BY EWS 05/28/98	DWG. NO. 8516-0000-00	
			ANGULAR ± 3°		SUB 05	
CAD MAINTAINED DRAWING. MANUAL CHANGES UNAUTHORIZED.						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Laird Performance Materials:

[8516-0102-23](#) [8516-0101-23](#) [8516-0108-23](#)