

Item # 8101-0101-40, UltraFlex Hollow Core Round Copper Knitted Wire Shielding




UltraFlex Hollow Core Round Copper Knitted Wire Shielding

Stock Locator

UltraFlex ElectroNit combines the optimum mechanical properties of beryllium copper with shielding effectiveness as much as 20 dB higher than conventional materials. It offers superb resiliency for consistent, point-to-point contact requiring the lowest compression forces among all other shielding materials and configurations. A wide range of platings, sizes, configurations, and excellent flexibility create optimum design latitude.

- Other platings available upon request

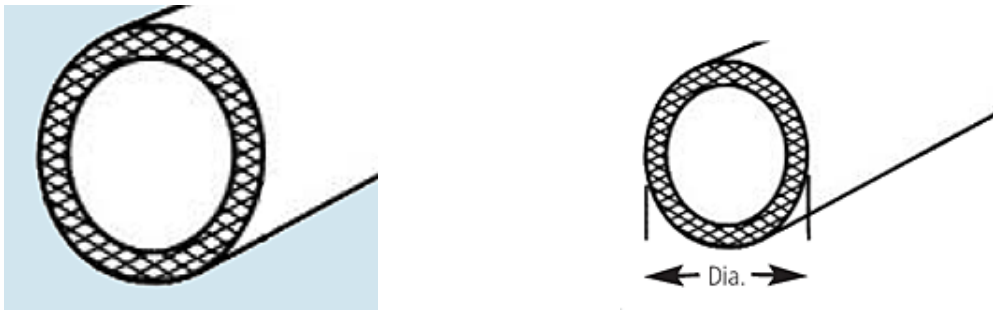

SPECIFICATIONS

Groove Dimensions W	0.047 inches
Groove Dimensions W	1.2 mm
Groove Dimensions H	0.06 inches
Groove Dimensions H	1.5 mm
Diameter	0.062 inches
Diameter	1.6 mm
Groove Dimensions W Tolerance	+0.020 inches

Groove Dimensions W Tolerance	+0.5 mm
Groove Dimensions H Tolerance	+0.020 inches
Groove Dimensions H Tolerance	+0.5 mm
Diameter Tolerance	+0.020 inches
Diameter Tolerance	+0.5 mm
Plating Options	Cadmium Plate Nickel Plate Tin Plate Zinc Clear Chromate

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Laird Performance Materials:](#)

[8101010140](#)