


# IC0603B181R-10

## PHYSICAL DIMENSIONS:

A	1.60 [.063]	+ 0.15[.006]
B	0.80 [.031]	+ 0.15[.006]
C	0.80 [.031]	+ 0.15[.006]
D	0.30 [.012]	+ 0.20[.008]

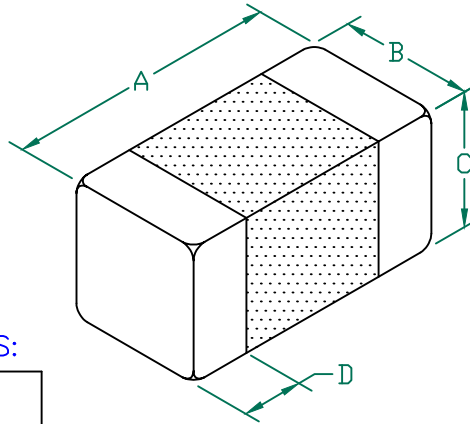


## ELECTRICAL CHARACTERISTICS:

L (nH) ± 10%	198	Max
	180	Nom
	162	Min
Q (Min)	15	
Freq. (MHz)	25	
Self-Resonant Freq (MHz)	165	
DCR(Max) $\Omega$	0.60	
I (Max)	200mA	

## NOTES: UNLESS OTHERWISE SPECIFIED


1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 4000 PCS/REEL, PAPER TAPE.
2. TERMINATION FINISH IS 100% MATTE Sn OVER Ni.
3. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
4. I (MAX.) IS BASED ON THE MAXIMUM SUSTAINED CURRENT APPLIED WHILE MAINTAINING A MAXIMUM TEMPERATURE RISE OF 40°C OVER AMBIENT.
5. OPERATING TEMP. RANGE: -40°C~+125°C. (INCLUDING SELF-HEATING)

## LAND PATTERNS FOR REFLOW SOLDERING

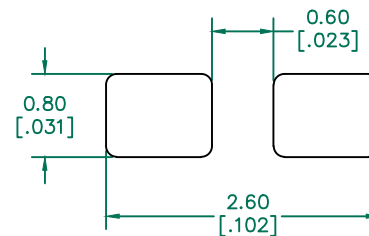

(For wave soldering, add 0.762[.030] to this dimension)

## RECOMMENDED SOLDERING CONDITIONS

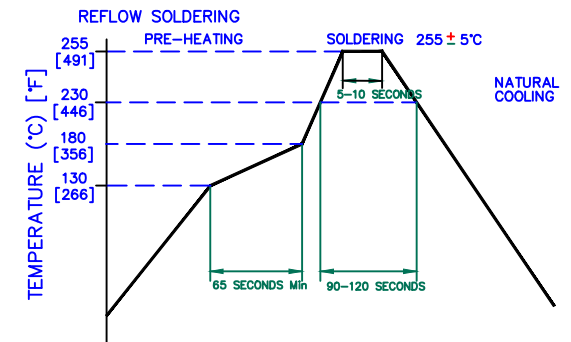

RoHS

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
D	REMOVE NOTE 5	07/21/16	QU	PROJECT/PART NUMBER: IC0603B181R-10			
C	ADD OPERATING TEMPERATURE UPDATE LAIRD LOGO AND REFLOW CURVE	08/05/13	QU	REV D CO-FIRE			
B	UPDATE COMPANY LOGO	06/16/08	JRK	DATE: 12/27/06			
A	ORIGINAL DRAFT	12/27/06	JRK	SCALE: NTS			
REV	DESCRIPTION	DATE	INT	SHEET: 1 of 1			

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Laird Performance Materials:](#)

[IC0603B181R-10](#)