

PowerCool Series Thermoelectric Cooler Assembly


The AA-024-24-22 is an Air-to-Air Thermoelectric Cooler Assembly that uses impingement flow to transfer heat. It offers dependable, compact performance by cooling objects via convection. Heat is absorbed and dissipated through high density heat exchangers equipped with air ducted shrouds and brand name fans. The heat pumping action is created by thermoelectric modules, which are custom designed to achieve a high coefficient of performance (COP). It has a maximum Q_c of 24 Watts when $\Delta T = 0$ and a maximum ΔT of 35 °C at $Q_c = 0$.

Features

- Compact design
- Precise temperature control
- Reliable solid-state operation
- Low noise
- RoHS-compliant


Applications

- Medical Diagnostic and Analytical Instrumentation
- Thermoelectric Coolers and Assemblies for Medical Applications
- Liquid Cooling Options for PET and SPECT Scanners
- Cooling for Centrifuges
- High-Performance Liquid Chromatography (HPLC)
- Heating and Cooling for Liquid Chromatography Systems

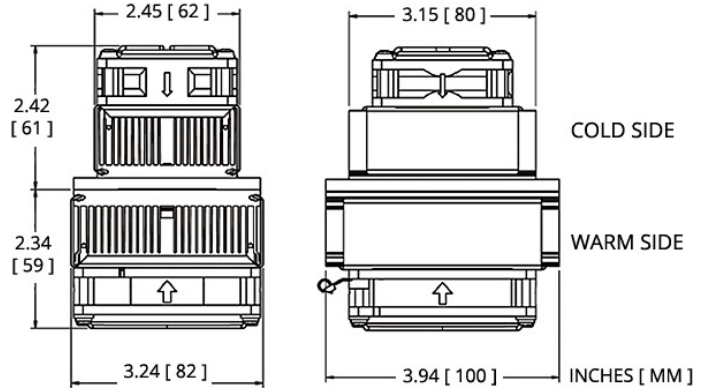


Electrical and Thermal Performance


Heat Pumped at Cold Side (Q_c)
Tambient = 35°C

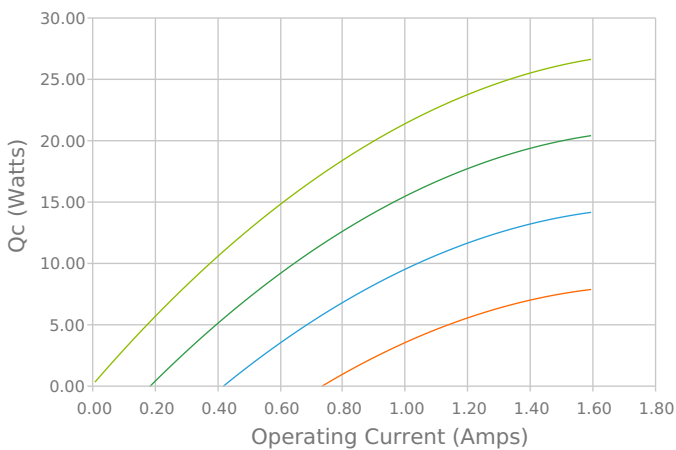


Heat Pumped at Cold Side (Q_c)
Tambient = 35°C

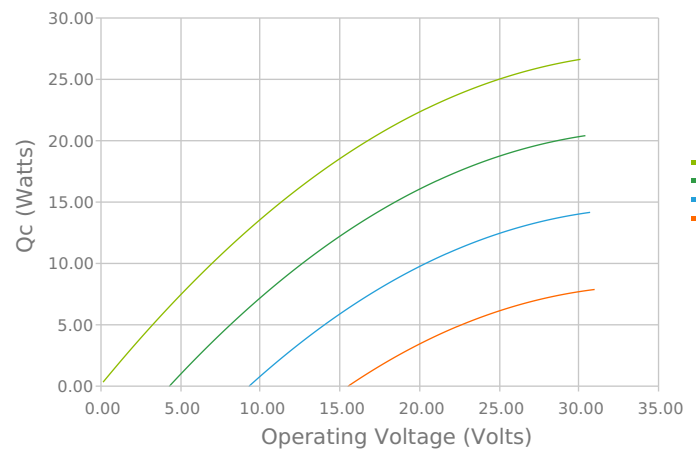


Coefficient of Performance (COP = Q_c/P_{in})
Tambient = 35°C

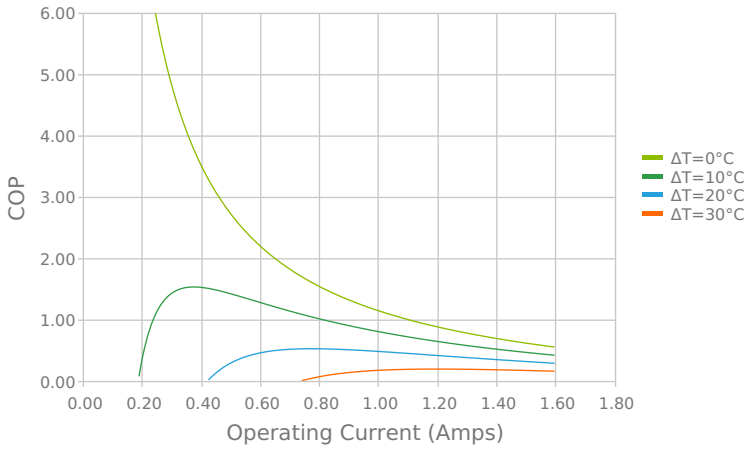


Coefficient of Performance (COP = Q_c/P_{in})
Tambient = 35°C

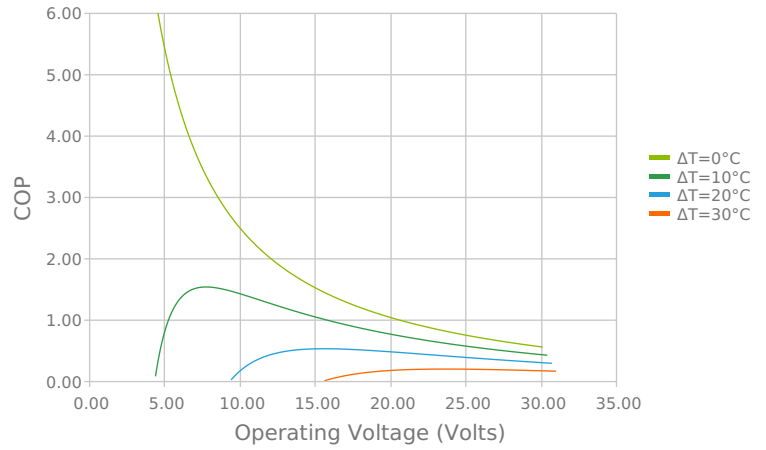


Total Heat Dissipated at Hot Side ($Q_h = Q_c + P_{in}$)
Tambient = 35°C

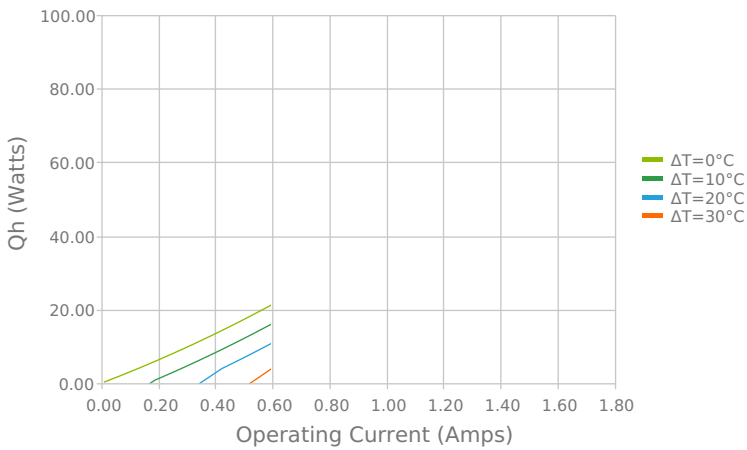


Total Heat Dissipated at Hot Side ($Q_h = Q_c + P_{in}$)
Tambient = 35°C

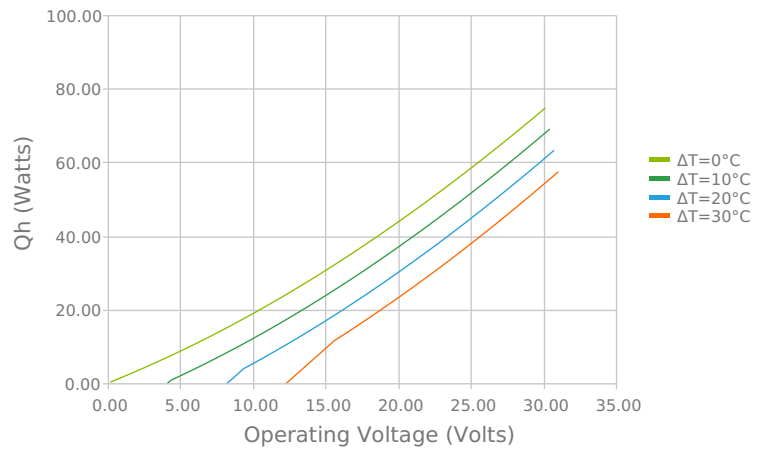

Heat Pumped at Cold Side (Q_c)
Voperating = 24 Volts | Ioperating = 1.28 Amps

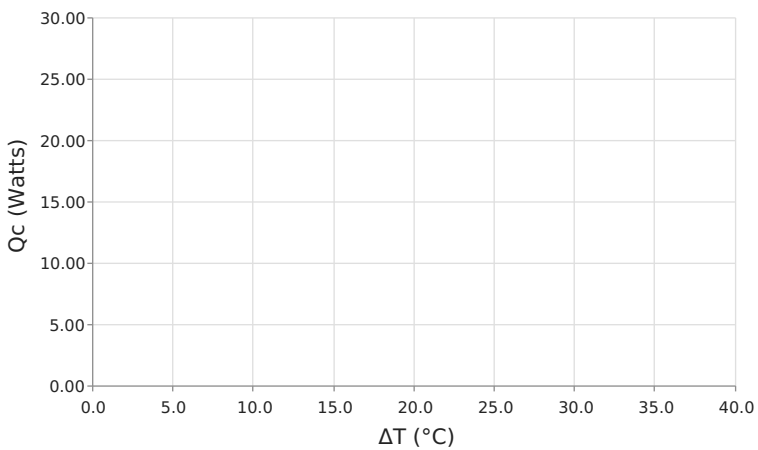


Coefficient of Performance (COP = Q_c/P_{in})
Voperating = 24 Volts | Ioperating = 1.28 Amps

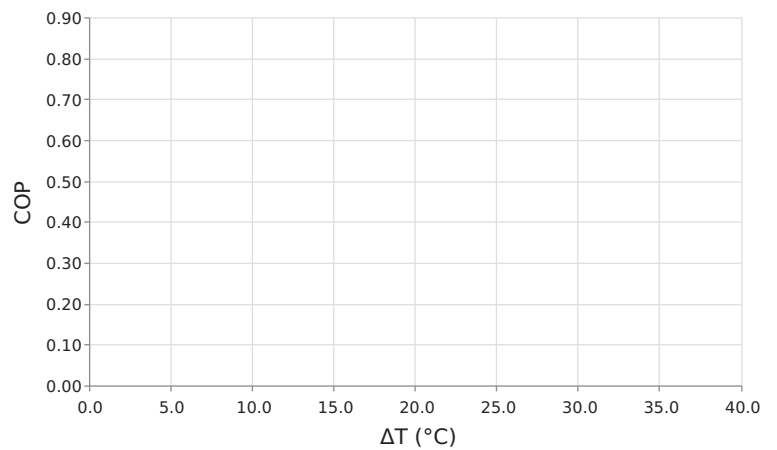

Specifications

Heat Transfer Mechanism, Cold Side	Air - Forced Convection
Heat Transfer Mechanism, Hot Side	Air - Forced Convection
Operating Temperature Range	-10°C to 54°C
Supply Voltage	24.0 VDC nominal / 30.0 VDC maximum
Current Draw	1.5 A running / 1.5 A startup
Power Supply	36.0 Watts
Performance Tolerance	10%
Hi-Pot Testing	No Testing
Fan MTBF	50000 hours
Weight	0.60 kg
Panel Mounting	Through

Mounting Hole Location

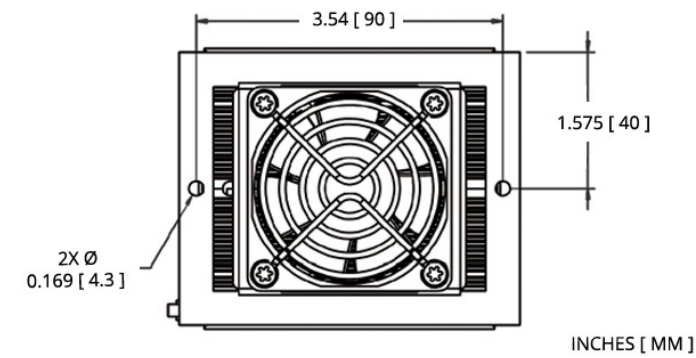

Wiring Schematic

ELECTRICAL CONNECTIONS:

TEM+ : Pink
TEM - : Green
FAN+ : Purple
FAN - : Blue

Warning: Single supply not applicable in heating mode or with PWM-regulation.

Notes

¹For indoor use only

Any information furnished by Tark Thermal Solutions and its agents, whether in specifications, data sheets, product catalogues or otherwise, is believed to be (but is not warranted as being) accurate and reliable, is provided for information only and does not form part of any contract with Tark Thermal Solutions. All specifications are subject to change without notice. Tark Thermal Solutions assumes no responsibility and disclaims all liability for losses or damages resulting from use of or reliance on this information. All Tark products are sold subject to the Tark Thermal Solutions Terms and Conditions of sale (including Tark's limited warranty) in effect from time to time, a copy of which will be furnished upon request.

© Copyright 2025 Tark Thermal Solutions, Inc. All rights reserved.

Revision: 00 Date: 06-01-2022

Print Date: 05-12-2025

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Tark Thermal Solutions:](#)

[AA-024-24-22-00-00](#)