
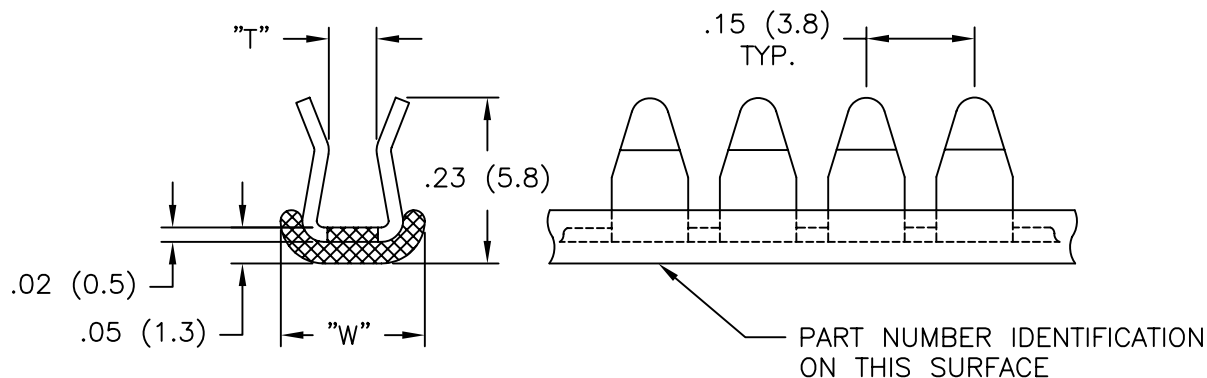




PART NO.	WIDTH "W"	"T" APPLICATION THICKNESS RANGE
MCCGF-1N	.19 (4.8)	.029-.045 (0.7-1.1)
MCCGF-2N		.044-.056 (1.1-1.4)
MCCGF-3N		.055-.069 (1.4-1.7)

NOTES:

1. MATERIAL: 304 STAINLESS STEEL (RMS-283).
2. COATING: NYLON 11 (RMS-192), COLOR: BLACK.
3. CUSHION: THERMOPLASTIC ELASTOMER, 60 SHORE D (RMS-300), COLOR: BLACK.
TABER ABRASION RESISTANCE: PER D1044 1kg LOAD, C17 WHEEL, 25 mg LOSS AFTER 1000 CYCLES.
4. DIELECTRIC STRENGTH: 1500 VOLTS @ 60 HZ.
5. OPERATING TEMPERATURE RANGE: -40°F TO 185°F (-40°C TO 85°C).
6. SALT SPRAY TESTING: 2000 HOURS, ASTM B117. MIL-STD-202, METHOD 301.
7. FLAMMABILITY: UL 94 V-0 YELLOW CARD NO. E113553 NZMT2.
8. RANDOM SHOCK AND VIBRATION: MIL-STD-1344, METHOD 2005.1, TEST CONDITION VI, LETTER "J".
DURATION 8 HOURS LONGITUDINAL AND 8 HOURS PERPENDICULAR. rms G 41.7.
9. LENGTH: 100 FT (30.5m) REELS.
10. HAND HELD CUTTING TOOL NEEDED, ORDER P/N : MCGS-1
11. FITS ANY FOUR AXIS CONTOUR.
12. COLOR CODE STRIPE: PRINTING INK (RMS-346).

			TITLE: METAL CONTINUOUS CUSHION GROMMET, FLEXIBLE					DWG IN IN (MM)	
			TOLERANCES UNLESS NOTED .XX=±.010 .XXX=±.005 FRAC=±1/64 ANG=±1°	FILE # MCCGF	DWN: S.M.	APP:	FINAL		
				MAT'L: SEE NOTES	DT: 08.01.02	DT:	PART #	PRINT TYPE	
B	SEE ECN #1284 FOR CHANGES	SK 02.08.07	RE: RICHCO, INC. RICHCO INC. PO BOX 804238, CHICAGO, 60680 (773) 539-4060				MCCGF SERIES	CA	
A	SEE ECN #1283 FOR CHANGES	SK 02.05.07							
REV	DESCRIPTION	ENGR DATE							

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Essentra:](#)

[MCCGF-2N](#) [MCCGF-3N](#) [MCCGF-1N](#)