
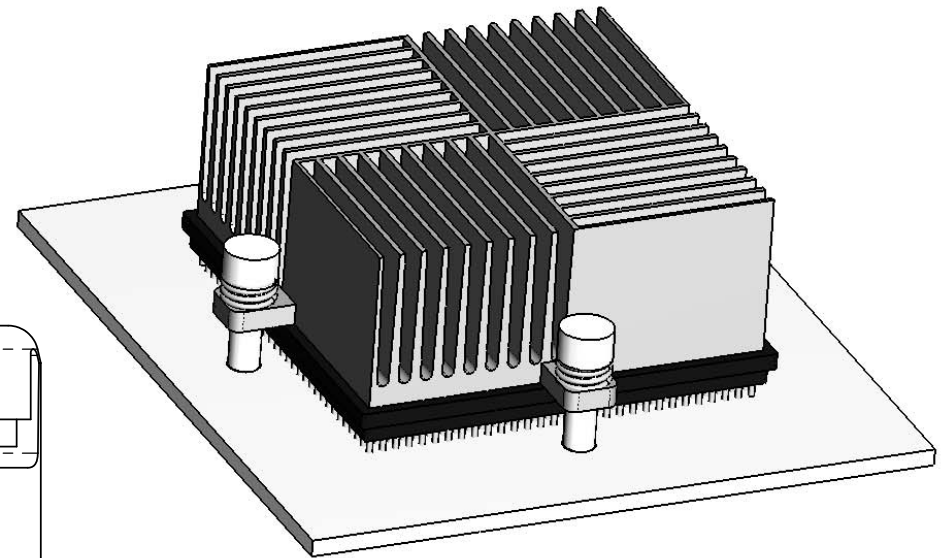
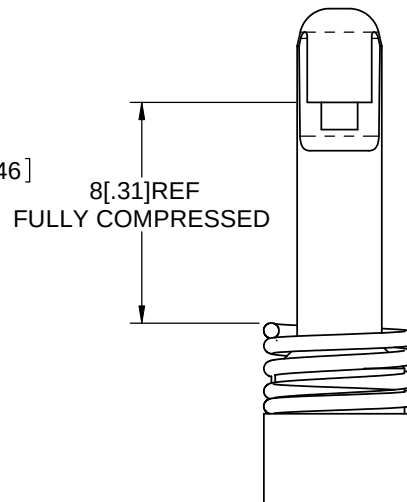


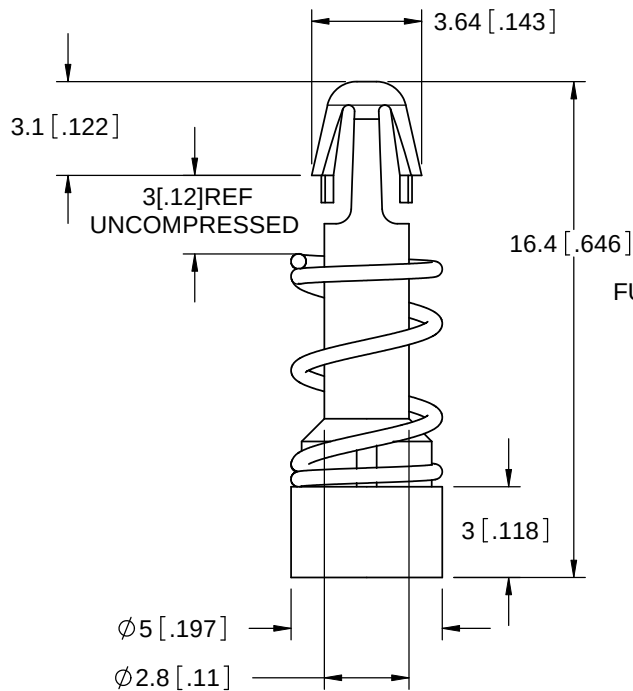

TYPICAL APPLICATION

NOTES:

1. MATERIAL: NYLON 6/6 UL 94 V-2 RMS-047, COLOR: NATURAL
2. SPRING MATERIAL: STEEL, RMS-326, CHROME PLATED (RMS-355).
3. DESIGNED TO SNAP LOCK INTO A $\varnothing 3.00 \pm 0.08$ [$\varnothing 1.18 \pm .003$] HOLE
4. INSERTS THROUGH A $3.18-4.00$ [$\varnothing 1.25-.157$] HOLE IN HEATSINK
5. SPRING RATE: 12 LB/IN +/- 2
6. PART IS DESIGNED IN MILLIMETERS,
INCH CONVERSIONS ARE PROVIDED FOR REF ONLY

F	SEE CO 200526 FOR CHANGES	SK	04.26.10
E	SEE CO 200099 FOR CHANGES	SK	01/07/08
D	SEE ECN #1205 FOR CHANGES	SJ	08/03/06
C	SEE ECN #937 FOR CHANGES	SK	02/08/05
B	SEE ECN #922 FOR CHANGES	SK	01/25/05
A	RELEASED FOR PRODUCTION	SM	10/19/04
REV.	DESCRIPTION	ENGR.	DATE

TITLE: HEAT SINK SPRING MOUNT RIVET							DWG IN mm[IN]	
CREATED USING SOLIDWORKS	FILE #: HSR-1		DWN: D.J.Z.	APP: D.J.Z.	FINAL			
TOLERANCES UNLESS NOTED =±.25 ANG.=±1°	SHEET: 1 OF 1	SHEET SIZE: A	DT: 08/27/2004	CHKD: S.J.	PART #		PRINT TYPE	
	RE: RICHCO INC. --		RICHCO, INC. ENG@RICHCO-INC.COM (773) 539-4060		HSR-1		CA	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Essentra:](#)

[HSR-1](#)