




Part No.	"A"	"B"	
RLEHCBS-5-01BK	.38 [9.5]	.06 [1.5]	
RLEHCBS-6-01BK	.44 [11.1]	.00 [1.5]	
RLEHCBS-7-01BK	.50 [12.7]	.08 [2.1]	
RLEHCBS-8-01BK	.56 [14.3]	.00 [2.1]	
	· ·		

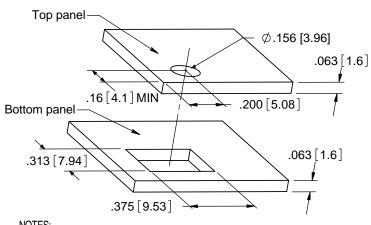

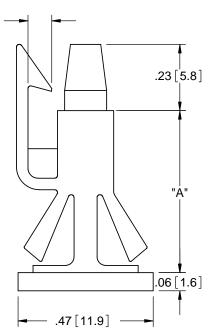

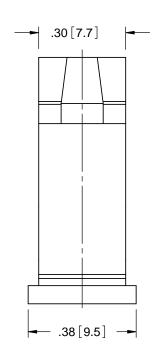

- NOTES:

 1. Material: Nylon 6/6 (RMS-01).
 Flame Retardant Nylon, (RMS-19) available by special order.
 To order, replace -01 with -19.

 2. Color: Black. Natural, also available by special order.
 To order, remove BK from part no.
 3. Designed to snap lock into the bottom of a .313 X .375 [7.94 X 9.53] hole, and top panel with Ø.156 [3.96] hole .200 [5.08] from edge.

 4. Board clearance is dependent on bottom panel thickness.

1			
D	SEE ECN #1256 FOR CHANGES	SK	11/30/06
С	SEE ECN #875 FOR CHANGES	SM	11/01/04
В	ADDED DIMENSIONS, SEE ECN #786 FOR CHANGES	SM	04/30/04
Α	RELEASE FOR PRODUCTION	SM	08/26/03
REV.	DESCRIPTION	ENGR.	DATE
	·		

REVERSE LOCKING EDGE HOLDING CIRCUIT BOARD SUPPORT							DWG IN IN[mm]	\mathbb{Q}
	CREATED USING SOLIDWORKS	FILE #: RLEHCBS		DWN: D.J.Z.	APP: DJZ	FINAL		
)6)4	TOLERANCES UNLESS NOTED	SHEET: 1 0F 1	SHEET SIZE: A	DT: 06/19/03	CHKD: SJ	PART#		PRINT
)4	.XX=±.010 .XXX=±.005	RE: RICHCO		RICHCO, INC.		SEE TABLE		TYPE
)3 F	FRAC.=±1/64		ENG@RICHCO-INC.COM (773) 539-4060				CA	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Essentra:

RLEHCBS-5-01BK RLEHCBS-6-01BK RLEHCBS-7-01BK RLEHCBS-8-01BK