





VDCF-XX-XX

DIMENSIONS	
COLUMNS	A
10	.66
20	1.16
30	1.66
40	2.16
50	2.66

DIMENSIONS		
ROWS	B	C
04	.37	.30
05	.42	.35
06	.47	.40
08	.57	.50
10	.67	.60

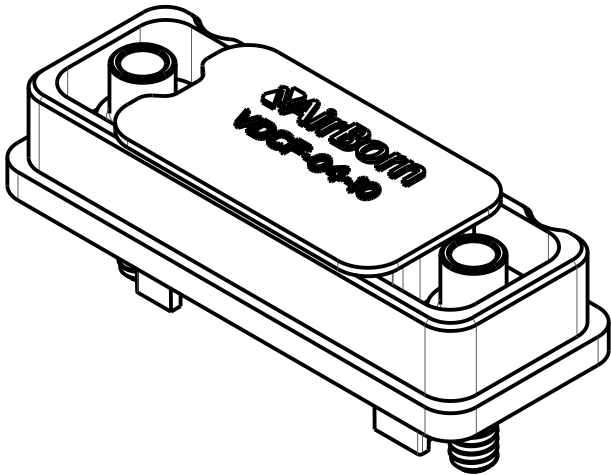

VRF-04-10-50-00-G
CONNECTOR SHOWN FOR
REFERENCE ONLY

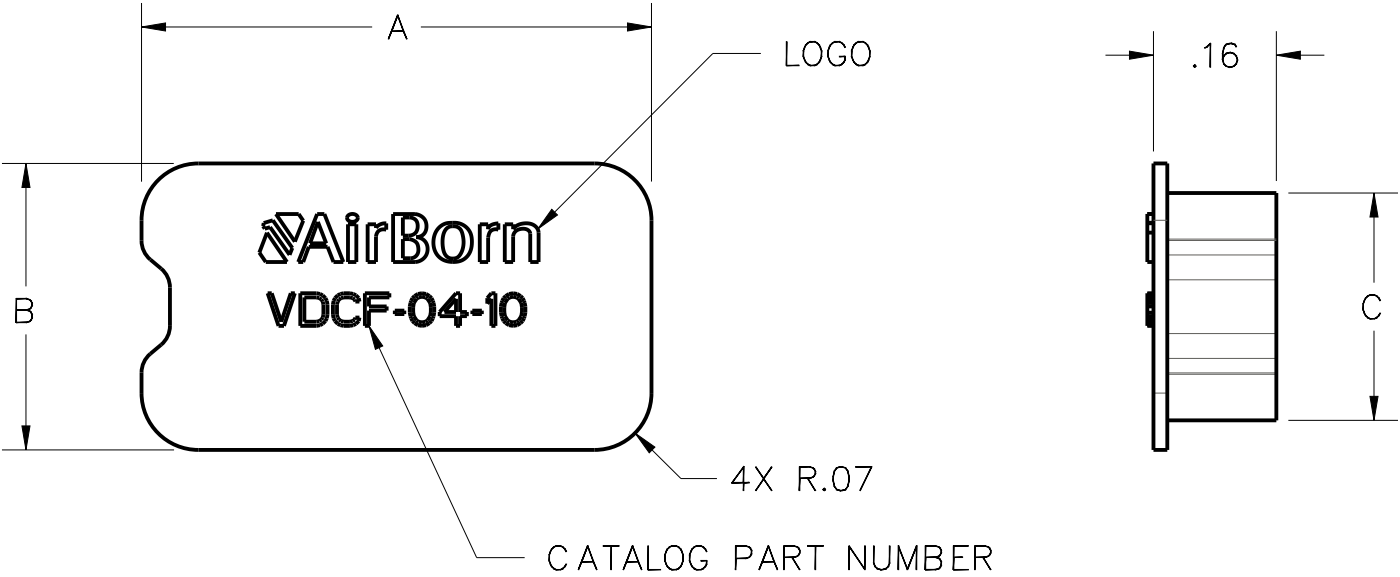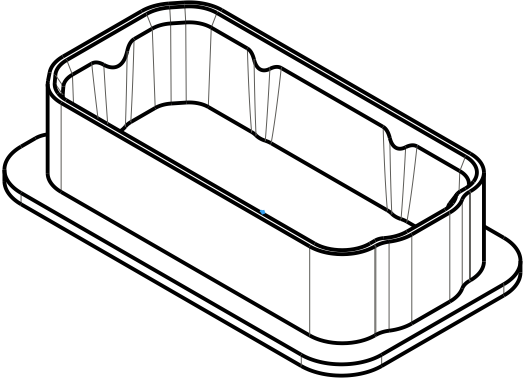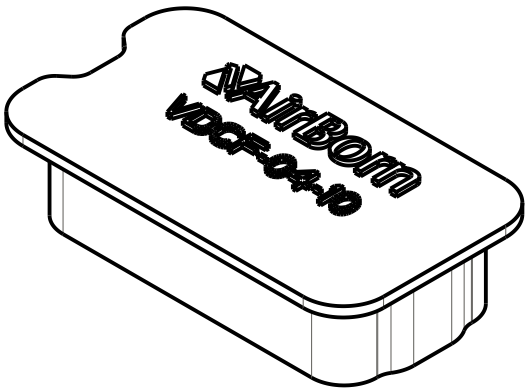

This document contains technical data whose export is governed by the U.S. Export Administration Regulations (EAR).
Diversion contrary to U.S. law is prohibited.

NOTES:

- THIS COVER CAN BE INSTALLED ON THE FOLLOWING: VRF, VSF, VRRAF, VSRAF, VRD, VRW, VRCS WITH FEMALE INTERFACE.
- MATERIAL: CARBON FILLED POLY-PROPYLENE. STATIC DECAY MEETS MIL-PRF-81705D. SURFACE RESISTIVITY PER ASTM D 257-99 (2005): $<1.0 \times 10^{12}$ OHMS/SQUARE. COLOR: BLACK.

MATERIAL: SEE NOTES Temper: Per Spec.: R/M P/N ref: Certification required: N/A		UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE: Decimals: .XX ± 0.01 Concentricity: Decimals: .XXX ± 0.010 Angles: ± 5° Decimals: .XXXX ± 0.0100 Radius: ± Parts are to be symmetrical about centerline within ± .004 Surfaces to be flat, perpendicular parallel within .004 T.I.R. Dimensions are in inches/DO NOT SCALE PRINT Surface finish to be ✓ or better				AirBorn Georgetown, Texas 78626		Cage Code 10400			
HEAT TREAT: N/A Per Spec.: Certification required: N/A		APPLICATION: verSI SERIES				DRAWING STATE: Released <input checked="" type="checkbox"/> RELEASED This drawing is not authorized for production unless it is released					
FINISH: N/A Per Spec.: Certification required: N/A		A	SEE ECO	TAD 072121	W65135 DL 072121	DR. RAS 021320	T I T L E	DUST COVER, FEMALE verSI SERIES ESD		SIZE B	
MAKE FROM: N/A NEXT ASSY: N/A		REV	DESCRIPTION	DR. BY DATE	ECO NO. APPD. BY	CK. RCS 021420		APPD. KCT 050420	DWG #		VDCF-XX-XX

C

B

A