




| | |
|----------------------------------|--|
| Order Code | TCK-123 |
| Inductance (each winding) | 1219 $\mu\text{H} \pm 35\%$ (at 100 kHz / 100 mV) |
| Impedance (DCR) | 26.2 m Ω max. |
| Rated Current | 4 A max. |
| Rated Voltage | 500 VDC max. (between windings) |
| Operating Temperature | -40°C to +105°C |
| RoHS Exemptions | No Exemptions |
| Overview Link | www.tracopower.com/overview/tck-123 |



Impedance Curve

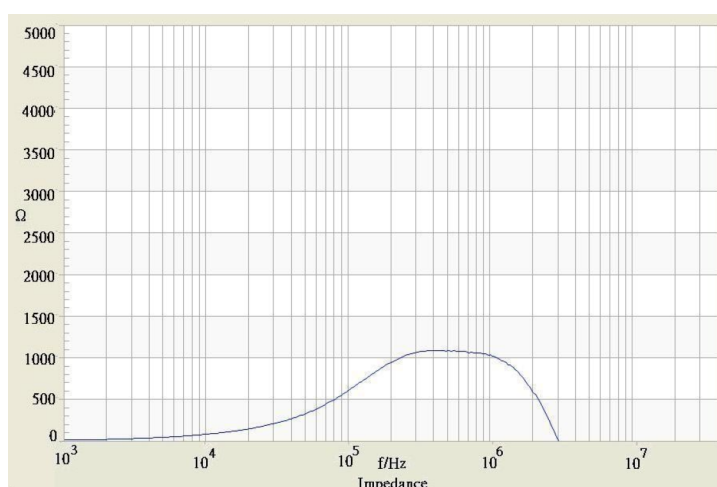

Outline Dimensions

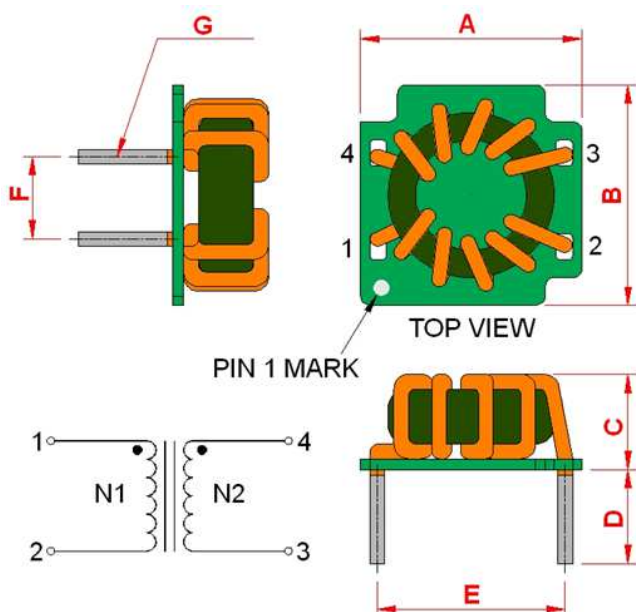

Dimensions [mm]

| | |
|----------|------------------------|
| A | 16.6 ± 0.4 |
| B | 16.4 ± 0.4 |
| C | 12.5 max. |
| D | 5.0 ± 1.0 |
| E | 14.5 ± 0.5 |
| F | 6.1 ± 0.5 |
| G | $\varnothing 0.6$ max. |

All specifications valid at +25°C, unless otherwise stated.