


RFB00035/12.20/6.4 Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

Technical Data Sheet		Rosenberger												
RPC-1.35	Launcher jack for glass bead	P9K521-800D3												
 For glass-bead of 0.127mm pin diameter. Interface According to IEC 61169-35 Documents Assembly instruction 01E Material and plating<table><tr><td>Connector parts</td><td>Material</td><td>Plating</td></tr><tr><td>Center contact</td><td>CuBe</td><td>Gold, min. 1.27 µm, over chemical nickel</td></tr><tr><td>Outer contact</td><td>CuBe or equiv.</td><td>Gold, min. 1.27 µm, over chemical nickel</td></tr><tr><td>Dielectric</td><td>PEEK</td><td></td></tr></table>			Connector parts	Material	Plating	Center contact	CuBe	Gold, min. 1.27 µm, over chemical nickel	Outer contact	CuBe or equiv.	Gold, min. 1.27 µm, over chemical nickel	Dielectric	PEEK	
Connector parts	Material	Plating												
Center contact	CuBe	Gold, min. 1.27 µm, over chemical nickel												
Outer contact	CuBe or equiv.	Gold, min. 1.27 µm, over chemical nickel												
Dielectric	PEEK													
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.com		Tel. : +49 8684 18-0 Email : info@rosenberger.com												
		Page 1 / 2												

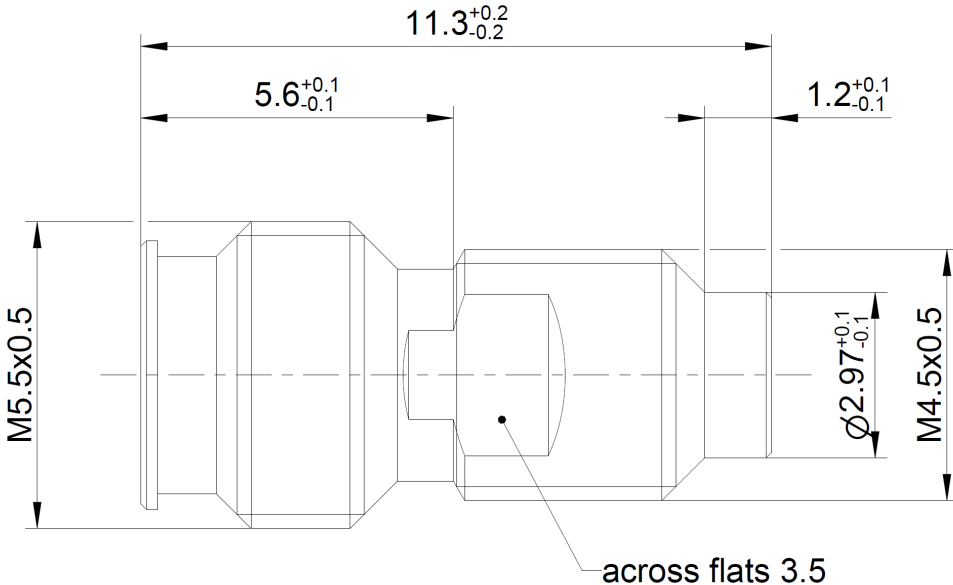