


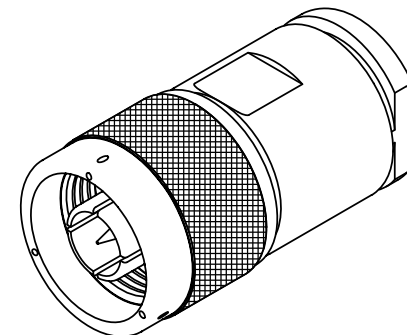


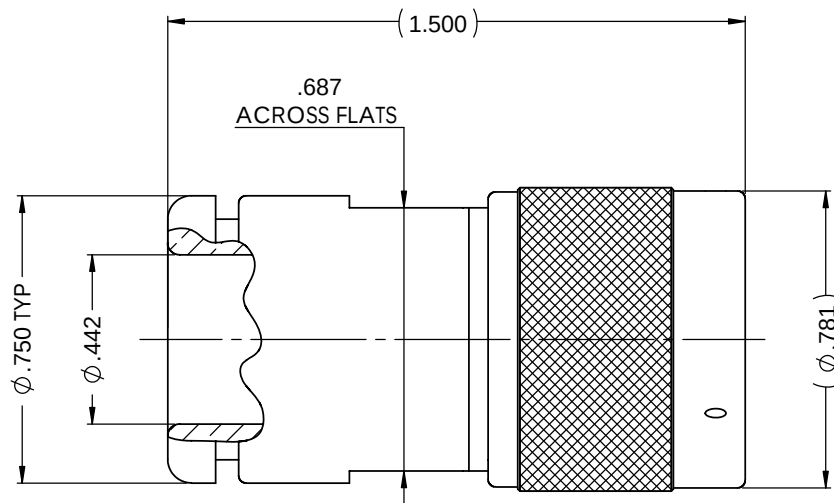

1101004A00E-001

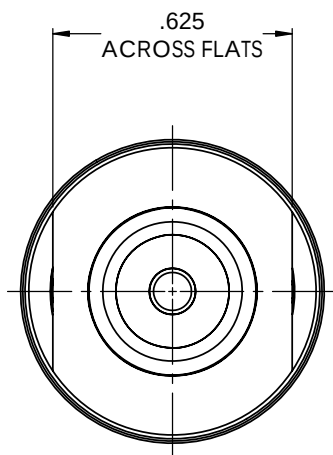

NOTES:

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.

CONTACT	BRASS PER ASTM B16, C36000 ALLOY, TEMPER H02	GOLD PLATE PER ASTM B488
LOCKING RING	PHOSPHOR BRONZE PER ASTM B139, C54400, TEMPER HD	N/A
WASHER	BRASS PER ASTM B16, C36000 ALLOY, TEMPER H02	SILVER PLATE PER ASTM B700
CLAMP	BRASS PER ASTM B16, C36000 ALLOY, TEMPER H02	SILVER PLATE PER ASTM B700
WASHER	BRASS PER ASTM B16, C36000 ALLOY, TEMPER H02	SILVER PLATE PER ASTM B700
INSULATOR	TEFLON PER ASTM D1710, TYPE 1, GRADE 1, CLASS A.	N/A
GASKET	SILICONE RUBBER PER A-A-59588	N/A
COUPLING NUT	BRASS PER ASTM B16, C36000 ALLOY, TEMPER H02	SILVER PLATE PER ASTM B700
CONTACT FINGER	BRASS PER ASTM B16, C36000 ALLOY, TEMPER H02	SILVER PLATE PER ASTM B700
BODY	BRASS PER ASTM B16, C36000 ALLOY, TEMPER H02	SILVER PLATE PER ASTM B700
CLAMP NUT	BRASS PER ASTM B16, C36000 ALLOY, TEMPER H02	SILVER PLATE PER ASTM B700
DESCRIPTION	MATERIAL	FINISH

Table 1

M39012/01-0005

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
DELTA ELECTRONICS MFG CORP. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
DELTA ELECTRONICS MFG CORP. IS
PROHIBITED.

FILE NAME: 1101004A00E-001T

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm 1/64$
ANGULAR: MACH $\pm 1^\circ$ BEND $\pm 1^\circ$
TWO PLACE DECIMAL $\pm .01$
THREE PLACE DECIMAL $\pm .005$
SURFACE FINISH = 63
MAX. CORNER BREAKS = .004

THIRD ANGLE
PROJECTION

MATERIAL
SEE TABLE

FINISH
SEE TABLE

SCALE: 3:1

REVISIONS				
REV.	DESCRIPTION	DATE	ENG APPROVED	MFG APPROVED
A	REDRAWN	4/20/2015	BJM	MCD

NAME		DATE	DELTA ELECTRONICS MFG CORP. BEVERLY, MA 01915	
DRAWN	SRC	4/20/2015	www.deltar.com / Ph: 978-927-1060 / Fax: 978-922-6430	
CHECKED	BJM	4/20/2015	TITLE: N CAPTIVE CONTACT PLUG FOR RG-11, 144, 165, 213, 214, 216, & 225/U CABLES	
ENG APPR.	BJM	4/20/2015	SIZE DWG. NO. REV	
COMMENTS:			B 1101004A00E-001 A	
			CODE ID - 00795 WEIGHT: 51.08 g SHEET 1 OF 1	