



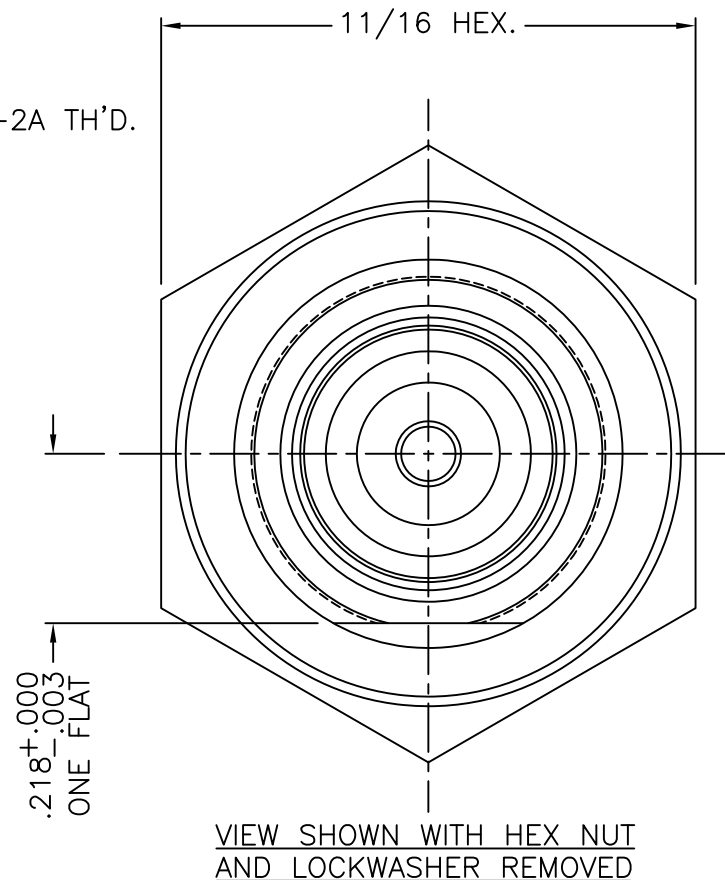

1216037A59E-000

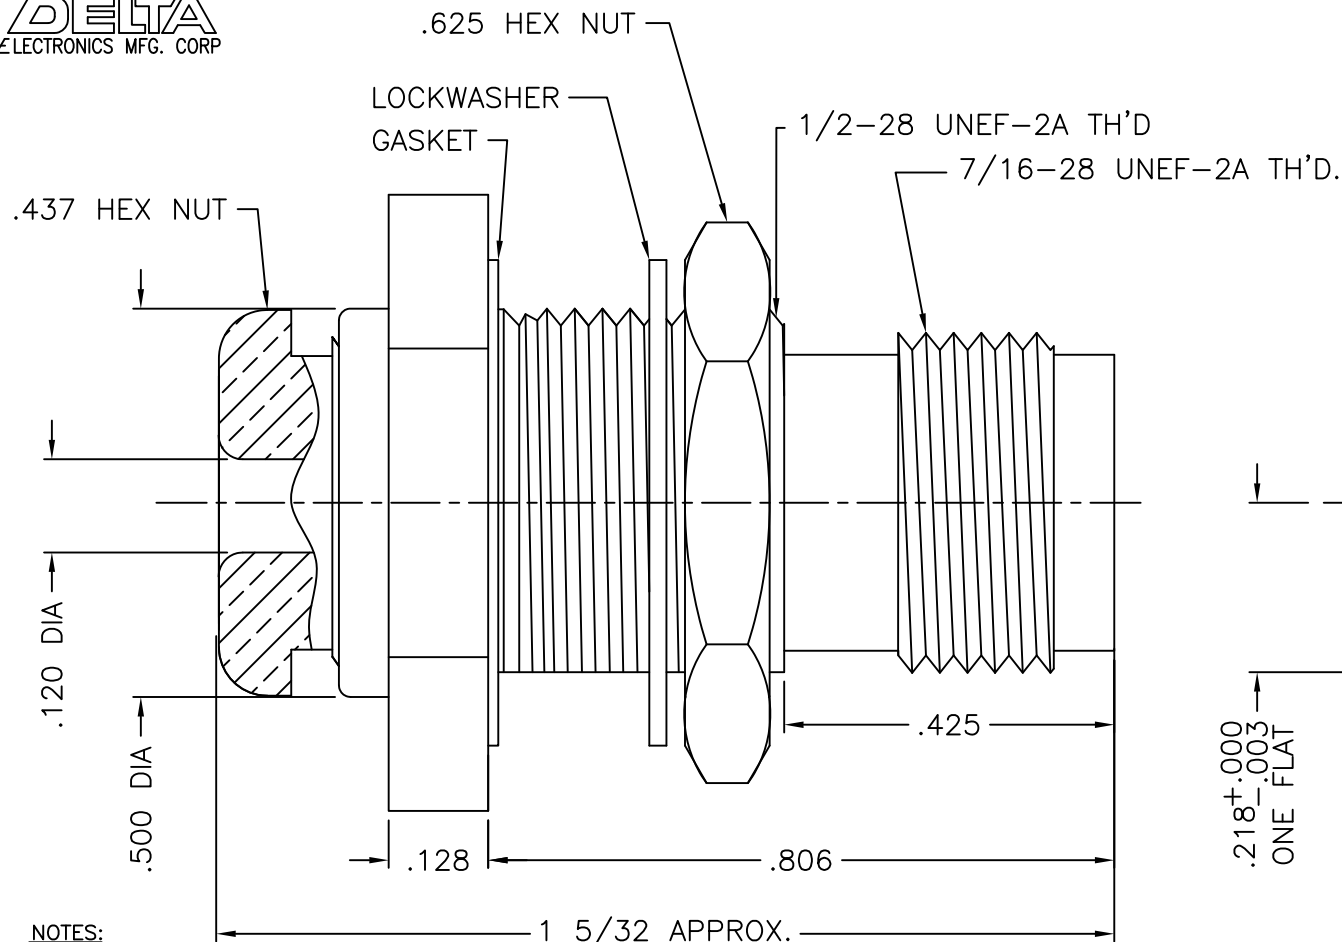

NOTES:

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.
2. MATERIAL: CONTACT - BERYLLIUM COPPER PER ASTM B196.
LOCKWASHER - SPRING STEEL
INSULATORS - TEFLON PER ASTM D4894
GASKETS - SILICONE RUBBER PER A-A-59588
ALL OTHER METAL PARTS - BRASS PER ASTM B16
3. FINISHES: CONTACT - GOLD PLATE PER ASTM B488
ALL OTHER METAL PARTS - SILVER PLATE PER ASTM B700
4. RECOMMENDED TORQUE VALUES: CLAMP NUT - 20 in-lbs
PANEL HEX NUT - 35 to 40 in-lbs

UNLESS OTHERWISE SPECIFIED: TOLERANCES: 3 PLACES = $\pm .005$, 2 PLACES = $\pm .02$, ANGLES = $\pm 1/2^\circ$, SURFACE FINISH = 63

A	REVISED	1/29/19
-	OUTLINE	11/11/08
ALT.	REVISIONS	DATE

M39012/28-0018

DELTA ELECTRONICS MFG. CORP. Beverly, MA 01915

TITLE: "TNC" CAPTIVE CONTACT B'HEAD MOUNTING CLAMP
JACK FOR RG-174, 179B, 187A, 188A & 316/U CABLES

Drawn by BJM 11/11/08	Scale 4/1	Ckd. by MR	Engr Appd MR	FILE NAME: 1216037A59E-000T
-----------------------------	--------------	---------------	-----------------	--------------------------------

CODE IDENT.-00795

1216037A59E-000

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS MFG CORP. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.