

network module, Modicon M580, Ethernet IP/Modbus TCP

BMENOC0301

Main

Range of product	Modicon M580
Product or component type	Communication module
Device application	Process and control communication module

Complementary

•	
Product compatibility	Modicon M580 standalone CPU (BMEP58) Modicon M580 Redundant CPU (BMEH58) Modicon M580 safety CPU (non interfering type 1) (BMEP582) Modicon M580 safety Redundant CPU (non interfering type 1) (BMEH582) Modicon X80 Rack with Ethernet backplane (BMEXBP)
Mounting location	Main rack
Backplane slot location	Ethernet + X-bus Slot
Slot occupied by module	1
Maximum number of modules per rack	4
Supply	Internal power supply via rack
Integrated connection type	3 Ethernet, connector type: RJ45, transmission rate: 10/100 Mbit/s, transmission mode: double shielded twisted pair
Transmission support medium	Ethernet backplane
Communication service	Bandwidth management FDR server SNMP network administrator Modbus TCP I/O Scanner and Messaging Ethernet/IP I/O Scanner and Messaging RSTP support Port mirroring Embedded multiport switch
Web server	For commissioning, operational and maintenance
Current consumption	900 mA at 3.3 V DC (for product version >= 13) 1800 mA at 3.3 V DC (for product version < 13)
Local signalling	1 LED (green) for processor running (RUN) 1 LED (red) for processor or system fault (ERR) 1 LED (green/red) for ETH MS (Ethernet port configuration status) 1 LED (green/red) for Eth NS (Ethernet network status)
Width	32 mm
Height	103.7 mm
Length	86 mm
Net weight	0.2 kg

Environment

IP degree of protection	IP20
Ambient air temperature for operation	060 °C
Marking	CE
Directives	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility

Packing Units

_	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.500 cm
Package 1 Width	11.200 cm
Package 1 Length	12.000 cm
Package 1 Weight	254.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	15
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	4.100 kg



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

∅ Environmental footprint	
Total lifecycle Carbon footprint	283
Environmental Disclosure	Product Environmental Profile

Use Better

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	80ae656b-2f7e-4160-80e7-243915b2d097
REACh Regulation	REACh Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again


○ Repack and remanufacture	
End of life manual availability	End of Life Information
Take-back	No

BMENOC0301

Dimensions Drawings

Modules Mounted on Racks

Dimensions

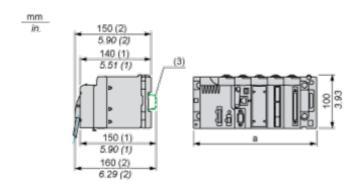

- (1) With removable terminal block (cage, screw or spring).
- (2) With FCN connector.
- (3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81

Image of product / Alternate images

Alternative





Aug 23, 2025



