

# soft starter for asynchronous motor, Altistart 01, ATS01, 22A, 380 to 415V, 7.5 to 11kW

ATS01N222QN

## Main

Range of product	Altistart 01	
Product or component type	Soft starter	
Product destination	Asynchronous motors	
Product specific application	Simple machine	
Device short name	ATS01	
Network number of phases	3 phases	
[Us] rated supply voltage	380415 V - 1010 %	
Motor power kW	11 kW, 3 phases at 380415 V 7.5 kW, 3 phases at 380415 V	
IcL starter rating	22 A	
Utilisation category	AC-53B conforming to EN/IEC 60947-4-2	
Current consumption	110 A at nominal load	
Type of start	Start with voltage ramp	
Power dissipation in W	124.5 W in transient state 4.5 W at full load and at end of starting	

# Complementary

•		
Assembly style	With heat sink	
Function available	Integrated bypass	
Supply voltage limits	342456 V	
Supply frequency	5060 Hz - 55 %	
Network frequency	47.563 Hz	
Output voltage	<= power supply voltage	
[Uc] control circuit voltage	Built into the starter	
Starting time	1 s / 100 5 s / 20 10 s / 10 Adjustable from 1 to 10 s	
Deceleration time symb	Adjustable from 1 to 10 s	
Starting torque	3080 % of starting torque of motor connected directly on the line supply	
Discrete input type	Logic (LI1, LI2, BOOST) stop, run and boost on start-up functions <= 8 mA 27 kOhm	
Discrete input voltage	2440 V	
Discrete input logic	Positive LI1, LI2, BOOST at State 0: < 5 V and <= 0.2 mA at State 1: > 13 V, >= 0.5 mA	

Discrete output current	2 A DC-13 3 A AC-15	
Discrete output type	Open collector logic LO1 end of starting signal Relay outputs R1A, R1C NO	
Discrete output voltage	24 V (voltage limits: 630 V) open collector logic	
Minimum switching current	10 mA at 6 V DC for relay outputs	
Maximum switching current	Relay outputs: 2 A at 250 V AC cos phi = 0.5 and L/R = 20 ms inductive load Relay outputs: 2 A at 30 kV DC cos phi = 0.5 and L/R = 20 ms inductive load	
Display type	LED (green) for starter powered up     LED (yellow) for nominal voltage reached	
Tightening torque	0.5 N.m 1.92.5 N.m	
Electrical connection	4 mm screw clamp terminal - rigid 1 110 mm² AWG 8 power circuit Screw connector - rigid without cable end 1 0.52.5 mm² AWG 14 control circuit 4 mm screw clamp terminal - rigid 2 16 mm² AWG 10 power circuit Screw connector - rigid 2 0.51 mm² AWG 17 control circuit Screw connector - flexible with cable end 1 0.51.5 mm² AWG 16 control circuit 4 mm screw clamp terminal - flexible without cable end 1 1.510 mm² AWG 8 power circuit Screw connector - flexible without cable end 1 0.52.5 mm² AWG 14 control circuit 4 mm screw clamp terminal - flexible with cable end 2 16 mm² AWG 10 power circuit 4 mm screw clamp terminal - flexible without cable end 2 1.56 mm² AWG 10 power circuit 5 crew connector - flexible without cable end 2 0.51.5 mm² AWG 10 control circuit	
Marking	CE	
Operating position	Vertical +/- 10 degree	
Height	154 mm	
Width	45 mm	
Depth	131 mm	
Product weight	0.56 kg	
Compatibility code	ATS01N2	
Motor power range AC-3	711 kW at 380440 V 3 phases	
Motor starter type	Soft starter	

# **Environment**

Electromagnetic compatibility	Conducted and radiated emissions level B conforming to CISPR 11 Conducted and radiated emissions level B conforming to IEC 60947-4-2 Damped oscillating waves level 3 conforming to IEC 61000-4-12 Electrostatic discharge level 3 conforming to IEC 61000-4-2 EMC immunity level 3 conforming to EN 50082-1 EMC immunity level B conforming to EN 50082-2 Harmonics level 3 conforming to IEC 1000-3-2 Harmonics level 3 conforming to IEC 1000-3-4 Immunity to conducted interference caused by radio-electrical fields level 3 conforming to IEC 61000-4-6 Immunity to radiated radio-electrical interference level 3 conforming to IEC 61000-4-3 Micro-cuts and voltage fluctuation conforming to IEC 61000-4-11 Voltage/current impulse level 3 conforming to IEC 61000-4-5	
Standards	EN/IEC 60947-4-2	
Product certifications	CSA UL CCC C-Tick GOST	
IP degree of protection	IP20	
Pollution degree	2 conforming to EN/IEC 60947-4-2	

Vibration resistance	1 gn (f= 13150 Hz) conforming to EN/IEC 60068-2-6 1.5 mm peak to peak (f= 313 Hz) conforming to EN/IEC 60068-2-6	
Shock resistance	15 gn for 11 ms conforming to EN/IEC 60068-2-27	
Relative humidity	595 % without condensation or dripping water conforming to EN/IEC 60068-2-3	
Ambient air temperature for operation	-1040 °C (without derating) 4050 °C (with current derating of 2 % per °C)	
Ambient air temperature for storage	-2570 °C conforming to EN/IEC 60947-4-2	
Operating altitude	<= 1000 m without derating > 1000 m with current derating of 2.2 % per additional 100 m	

# **Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.500 cm
Package 1 Width	17.500 cm
Package 1 Length	15.200 cm
Package 1 Weight	664.000 g
Unit Type of Package 2	S03
Number of Units in Package 2	14
Package 2 Height	30.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	10.060 kg
Unit Type of Package 3	P06
Number of Units in Package 3	112
Package 3 Height	75.000 cm
Package 3 Width	60.000 cm
Package 3 Length	80.000 cm
Package 3 Weight	90.588 kg

# **Contractual warranty**

Warranty 18 months



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

#### **Use Better**

Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


#### Use Again

○ Repack and remanufacture		
Take-back	No	
WEEE Label	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins	


## **Dimensions Drawings**

#### **Dimensions**

## Mounting on Symetrical (35 mm) Rail

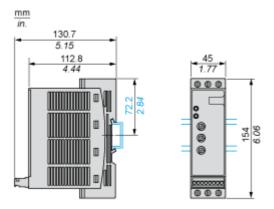


## **Screw Fixing**



(1) Retractable fixings

#### Connections and Schema

#### **Example of Manual Control**

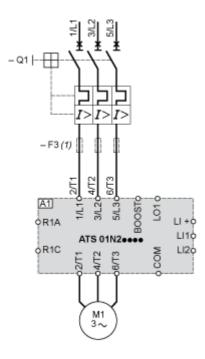

A1: Soft start/soft stop unit(1) For type 2 coordinationQ1: Motor circuit-breakerF3: 3 fast-acting fuses


# **Product data sheet**

#### ATS01N222QN

#### **Technical Description**

#### **Function Diagram**


#### 2-wire Control with Deceleration

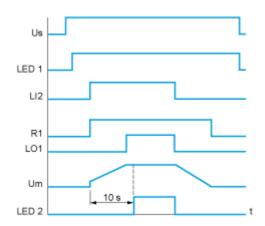

Us: Power supply voltage

LED 1: Green LED
LI2: Logic input
R1: Relay output
LO1: Logic output
LED 2: Yellow LED

#### 3-wire Control with Deceleration

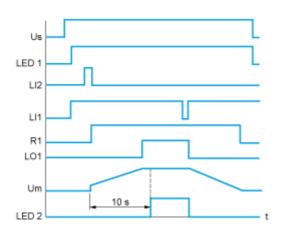

Us: Power supply voltage

LED 1: Green LED
LI2, LI1: Logic inputs
R1: Relay output
LO1: Logic output
Um: Motor voltage
LED 2: Yellow LED

Image of product / Alternate images

**Alternative** 







