

Head for illuminated selector switch, Harmony XB5, plastic, green handle, flush mounted, universal LED, 3 positions

ZB5FK1333

Important message: A change in appearance may be noted on the product but does not affect its use in terms of function and safety. This makes it compatible with our Universal LED blocks

Main

Range of product	Harmony XB5		
Product or component type	Head for illuminated selector switch		
Product compatibility	Universal LED		
Device short name	ZB5		
Bezel material	Dark grey plastic		
Mounting diameter	30.5 mm		
Head type	Built-in-flush		
Sale per indivisible quantity	1		
Shape of signaling unit head	Round		
Type of operator	stay put		
Operator profile	Green standard handle		
Operator position information	3 positions +/- 45°		

Complementary

CAD overall width	37 mm
CAD overall height	37 mm
CAD overall depth	46 mm
Net weight	0.03 kg
Mechanical durability	500000 cycles
Electrical composition code	M3 for <4 contacts using single blocks in front mounting with integral LED M6 for <2 contacts using single blocks in front mounting with integral LED and transformer M10 for <2 contacts using single blocks in front mounting with integral LED MF1 for <2 contacts using single blocks in front mounting with integral LED M4 for <4 contacts using single and double blocks in front mounting with integral LED
Device presentation	Basic element

Environment

Protective treatment	тн
Ambient air temperature for storage	-4070 °C
Ambient air temperature for operation	-4070 °C
Overvoltage category	Class II conforming to IEC 60536

IP degree of protection	IP66 conforming to IEC 60529
	IP67
	IP69
	IP69K
	IP09K
NEMA degree of protection	NEMA 13
	NEMA 4X
Resistance to high pressure washer	7000000 Pa at 55 °C, distance : 0.1 m
IK degree of protection	IK03 conforming to IEC 50102
Standards	EN/IEC 60947-1
	UL 508
	EN/IEC 60947-5-4
	JIS C8201-5-1
	EN/IEC 60947-5-1
	CSA C22.2 No 14
	EN/IEC 60947-5-5
	JIS C8201-1
	JIS C6201-1
Product certifications	CSA
	DNV
	BV
	LROS (Lloyds register of shipping)
	UL listed
	OL IISICO
Vibration resistance	5 gn (f= 2500 Hz) conforming to IEC 60068-2-6
Shock resistance	30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC
	60068-2-27
	50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC
	60068-2-27

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.588 cm
Package 1 Width	4.572 cm
Package 1 Length	5.334 cm
Package 1 Weight	27.216 a



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

∅ Environmental footprint	
Total lifecycle Carbon footprint	1
Environmental Disclosure	Product Environmental Profile

Use Better


Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
REACh Regulation	REACh Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

○ Repack and remanufacture	
End of life manual availability	End of Life Information
Take-back	No

Dimensions Drawings

Dimensions

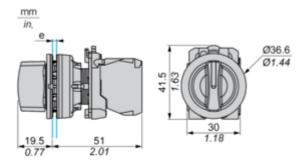

e: Clamping thickness: 1 to 6 mm / 0.04 to 0.24 in.


Product data sheet

ZB5FK1333

Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in Connectors



(1) Diameter on finished panel or support

(2) Ø30.75 mm recommended (Ø30.5 $_0^{+0.5}$) / Ø1.21 in. recommended (Ø1.20 in. $_0^{+0.0196}$)

· ·				•
Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	40	1.57
By Faston connectors	45	1.77	40	1.57

Product data sheet

ZB5FK1333

Technical Description

Electrical Composition Corresponding to Code M3



Electrical Composition Corresponding to Code M4



Electrical Composition Corresponding to Codes M6 and P2



Electrical Composition Corresponding to Codes M5, M10, MF1, MR1 and MF2



1	.ea	e	n	d
_	.cy	C		·

Single contact



Double contact



Light block



Possible location



Sequence of Contacts Fitted to 2-position Selector Switch Body

Position 315°



	Position	Тор		
Push	T GOILGII	Bottom		
	Location		Left	Right
	State		0	0
O-mto-sto	N/O		open	open
Contacts	N/C		closed	closed

Position 45°



		Тор			
Push	Position	Bottom			
	Location		Left	\otimes	Right
	State		1		1
Contacts	N/O		closed		closed
Contacts	N/C		open		open

ZB5FK1333

Technical Illustration

Dimensions

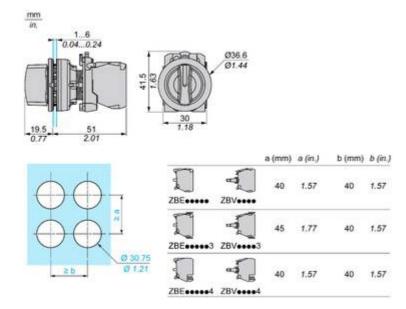


Image of product / Alternate images

Alternative











