

Product data sheet

Specifications



Relay, Harmony 8501K, DPDT, 8 pins, coil, 10A resistive at 120V AC, 240V AC, 1 HP at 277V AC, 2NO + 2NC

8501KPR12V24

Product availability: Stock - Normally stocked in distribution facility

Main

product range	8501K
product type	Relay
Relay Type	General purpose
mounting type	Socket
contact composition	DPDT
[Uc] control circuit voltage	240 V AC
manual operator	Without test button

Complementary

horsepower rating	1 hp 277 V AC
maximum switching voltage	300 V AC 30 V DC
contact material	Silver alloy (AgNi)
operating time	20 ms - pick-up 20 ms - drop-out
shape of pins	Tubular
for use with	8501NR52 8501NR51

Environment

ambient temperature range - operational	-40...55 °C (-40...131 °F)
product certifications	UL Listed UL Recognized CSA CE
Height	2.66 in (67.56 mm)
Width	1.4 in (35.6 mm)
Depth	1.4 in (35.6 mm)

Ordering and shipping details

Category	US10CP221141
Discount Schedule	0CP2
GTIN	785901334187
Returnability	Yes

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Country of origin	CN
-------------------	----

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.54 in (3.9 cm)
Package 1 Width	1.61 in (4.1 cm)
Package 1 Length	2.83 in (7.2 cm)
Package weight(Lbs)	3.4 oz (96 g)
Unit Type of Package 2	S02
Number of Units in Package 2	28
Package 2 Height	5.91 in (15 cm)
Package 2 Width	11.81 in (30 cm)
Package 2 Length	15.75 in (40 cm)
Package 2 Weight	16.191 lb(US) (7.344 kg)

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

 Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	25

Use Better


 Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

 Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No

Dimensions Drawings


Approximate Dimensions

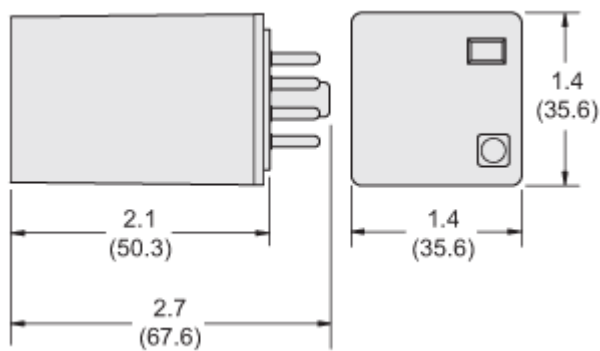

Connections and Schema

Connections and Wiring Diagrams

8501KP12●●●



NEMA
IEC

Image of product / Alternate images

Alternative



