

Pendant control station, Harmony XAC, plastic, yellow, pistol grip, 2 booted push buttons with 1NO

XACA211

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony XAC
Product or Component Type	Pendant control station
Device short name	XACA pistol grip

Complementary

Control station type	Double insulated		
Enclosure Material	Polypropylene		
Control Type	Intuitive		
Electrical circuit type	Control circuit		
Enclosure Type	Complete ready for use		
Control station application	Control of single speed hoist motor		
Control station composition	2 booted push-buttons		
Control button type	First push-button 1 NO raise, slow Second push-button 1 NO lower, slow		
Product compatibility	ZB2BE101 for each direction		
Mechanical interlocking	With mechanical interlocking		
Control station colour	Yellow		
Connections - terminals	Screw clamp terminals, 1 x 2.5 mm 2 with or without cable end Screw clamp terminals, 2 x 1.5 mm 2 with or without cable end		
Standards	UL 508 IEC 60204-32 IEC 60947-5-1 CSA C22.2 No 14		
Product Certifications	UL CSA		
Protective treatment	тн		
Ambient Air Temperature for Operation	-13158 °F (-2570 °C)		
Ambient Air Temperature for Storage	-40158 °F (-4070 °C)		
Vibration resistance	15 gn (f= 10500 Hz) conforming to IEC 60068-2-6		
Shock resistance	100 gn IEC 60068-2-27		
Overvoltage category	Class II conforming to IEC 61140		
IP degree of protection	IP65 conforming to IEC 60529		
IK degree of protection	IK08 conforming to IEC 62262		
Mechanical durability	1000000 cycles		

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Cable entry	Rubber sleeve with stepped entry 0.30.6 in (715 mm)			
Contact code designation	A600 AC-15, Ue = 240 V, Ie = 3 A IEC 60947-5-1 appendix A A600 AC-15, Ue = 600 V, Ie = 1.2 A IEC 60947-5-1 appendix A Q600 DC-13, Ue = 250 V, Ie = 0.27 A IEC 60947-5-1 appendix A Q600 DC-13, Ue = 600 V, Ie = 0.1 A IEC 60947-5-1 appendix A			
[Ithe] conventional enclosed thermal current	10 A			
[Ui] rated insulation voltage	600 V 3)IEC 60947-1			
[Uimp] rated impulse withstand voltage	6 kV IEC 60947-1			
Contact operation	Slow-break			
Maximum resistance across terminals	25 MOhm			
Operating force	1315 N			
Short-circuit protection	10 A fuse protection cartridge gG			
Rated operational power in W	40 W DC-13 1000000 cycles 60 cyc/mn 120 V 0.5 inductive IEC 60947-5-1 appendix C 48 W DC-13 1000000 cycles 60 cyc/mn 48 V 0.5 inductive IEC 60947-5-1 appendix C 65 W DC-13 1000000 cycles 60 cyc/mn 24 V 0.5 inductive IEC 60947-5-1 appendix C			
Terminals description ISO n°1	(13-14)NO			
Terminal identifier	(11-12)NC (13-14)NO			

Ordering and shipping details

Category	US10CS222473
Discount Schedule	0CS2
GTIN	3389110644814
Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.36 in (6.0 cm)
Package 1 Width	3.74 in (9.5 cm)
Package 1 Length	11.81 in (30.0 cm)
Package 1 Weight	9.4 oz (267.0 g)
Unit Type of Package 2	S02
Number of Units in Package 2	6
Package 2 Height	5.91 in (15.0 cm)
Package 2 Width	11.81 in (30.0 cm)
Package 2 Length	15.75 in (40.0 cm)
Package 2 Weight	4.200 lb(US) (1.905 kg)

Contractual warranty

Warranty 18 months



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

∇ Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	2
Environmental Disclosure	Product Environmental Profile

Use Better


Materials and Substances		
Packaging without single use plastic	No	
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)	
REACh Regulation	REACh Declaration	
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov	

Use Again

○ Repack and remanufacture				
Circularity Profile	No need of specific recycling operations			
Take-back	No			
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.			

Dimensions Drawings

Dimensions

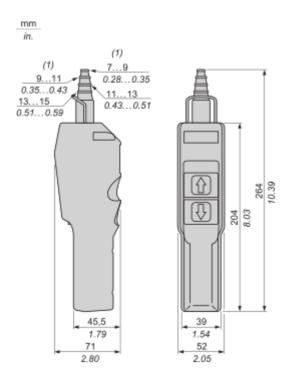


(1) Internal Ø

Product data sheet

XACA211

Connections and Schema

Control of Single-Speed Reversing Motor




XACA211

Performance Curves

Rated Operational Power

AC Supply 50/60 Hz Inductive Circuit

Operating rate: 3600 operating cycles/hour. Load factor: 0.5. Millions of operating cycles, AC-15 utilization category



Ithe Thermal current

(A) Current

DC Supply

Operating rate: 3600 operating cycles/hour. Load factor: 0.5.

Power broken in W for 1 million operating cycles, DC-13 utilization category

Voltage	V	24	48	120
Inductive circuit	w	65	48	40

Image of product / Alternate images

Alternative









XACA211



