

Illuminated double headed push button head, Harmony XB4, metal, 22mm, 1 green fLush+1 pilot light+1 red flush, unmarked

ZB4BW7A3740

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony XB4	
Product or Component Type	Head for illuminated double-headed push-button	
Product Compatibility	Integral LED	
Device short name	ZB4	
Bezel material	Chromium plated metal	
Head type	Standard	
Mounting diameter	0.9 in (22 mm)	
Sale per indivisible quantity	1	
Shape of signaling unit head	Rectangular	
Type of operator	spring return	
Operator profile	2 flush push-buttons - 1 central pilot light	
Operators description	Green unmarked - red unmarked	

Complementary

•		
CAD overall width	1.2 in (30 mm)	
CAD overall height	2.0 in (50 mm)	
CAD overall depth	1.2 in (30 mm)	
Net Weight	0.123 lb(US) (0.056 kg)	
Resistance to high pressure washer	1015.3 psi (7000000 Pa) 131 °F (55 °C) 0.1 m	
Colour of marking	Black marking when white caps White marking when green, red or black caps	
Operator profile	Green flush, unmarked Red flush, unmarked	
Mechanical durability	1000000 cycles	
Electrical composition code	M1 6 single front mounting integral LED M2 6 single and double front mounting integral LED M6 2 single front mounting integral LED and transformer M10 2 single front mounting integral LED	
Device presentation	Basic sub-assemblies	

Environment

Protective treatment	тн
Ambient Air Temperature for Storage	-40158 °F (-4070 °C)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Ambient Air Temperature for Operation	-40158 °F (-4070 °C)	
Electrical shock protection class	Class I conforming to IEC 61140	
IP degree of protection	IP66 IEC 60529 IP67 IEC 60529 IP69 IP69K	
NEMA degree of protection	NEMA 13 NEMA 4X	
IK degree of protection	IK06 conforming to IEC 50102	
Standards	IEC 60947-1 CSA C22.2 No 14 UL 508 IEC 60947-5-4 IEC 60947-5-5 JIS C8201-5-1 IEC 60947-5-1 JIS C8201-1	
Product Certifications	CSA LROS (Lloyds register of shipping) BV UL Listed DNV	
Vibration resistance	5 gn (f= 2500 Hz) conforming to IEC 60068-2-6	
Shock resistance	30 gn 18 ms) half sine wave acceleration IEC 60068-2-27 50 gn 11 ms) half sine wave acceleration IEC 60068-2-27	

Ordering and shipping details

Category	US10CS222468
Discount Schedule	0CS2
GTIN	3389119043748
Returnability	Yes
Country of origin	FR

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.17 in (5.5 cm)
Package 1 Width	1.30 in (3.3 cm)
Package 1 Length	2.09 in (5.3 cm)
Package 1 Weight	2.0 oz (56.0 g)
Unit Type of Package 2	S03
Number of Units in Package 2	200
Package 2 Height	11.81 in (30 cm)
Package 2 Width	11.81 in (30 cm)
Package 2 Length	15.75 in (40 cm)
Package 2 Weight	25.757 lb(US) (11.683 kg)

Contractual warranty

Warranty	18 months
----------	-----------



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

∇ Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	1
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
REACh Regulation	REACh Declaration


Use Again

○ Repack and remanufacture	
Circularity Profile	End of Life Information
Take-back	No


Dimensions Drawings

Dimensions

Without Boot



With Boot ZBA708



Product data sheet


ZB4BW7A3740


Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board

Connection by Faston Connectors






- (1) Diameter on finished panel or support
- (2) 40 mm min. / 1.57 in. min.
- (3) 30 mm min. / 1.18 in. min.
- (4) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm $_0^{+0.4}$ / 0.88 in. $_0^{+0.016}$)
- (5) 45 mm min. / 1.78 in. min.
- (6) 32 mm min. / 1.26 in. min.

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection


Panel Cut-outs (Viewed from Installer's Side)

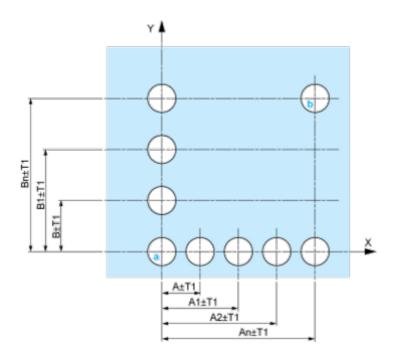

A: 30 mm min. / 1.18 in. min. **B:** 40 mm min. / 1.57 in. min.


Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

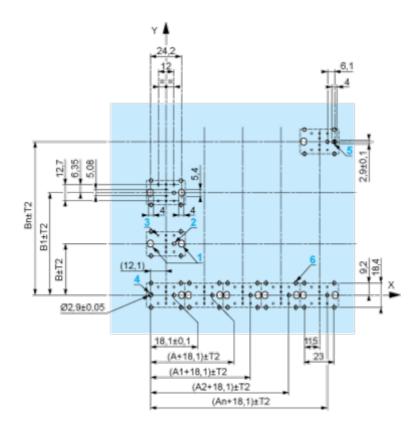

A: 30 mm min. B: 40 mm min. Dimensions in in.

ZB4BW7A3740

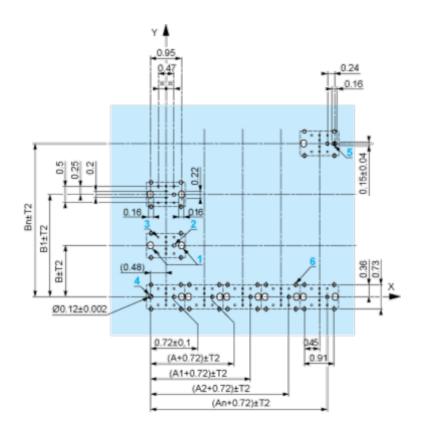

A: 1.18 in. min. **B:** 1.57 in. min.

General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in: T1 + T2 = 0.3 mm max.


Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB4 BZ009: ± 2 30' (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ 006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB4 BZ079 fixing collar/pillar and its fixing screws:
 - $_{\circ}\;$ every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
 - o with each selector switch head (ZB4 BD•, ZB4 BJ•, ZB4 BG•).

The fixing centers marked **a** and **b** are diagonally opposed and must align with those marked **4** and **5**.

Product data sheet

ZB4BW7A3740

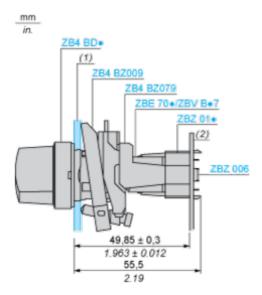

- (1) Panel
- (2) Printed circuit board

Mounting of Adapter (Socket) ZBZ 01•

- 1 2 elongated holes for ZBZ 006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ 01•
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- $_{ullet}$ 4 1 hole Ø 2.9 mm \pm 0.05 / 0.11 in. \pm 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- . 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ 01∙


Dimensions An + 18.1 relate to the Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 holes for centring adapter ZBZ 01•.

Product data sheet

ZB4BW7A3740

Technical Description

Electrical Composition Corresponding to Codes M1 and M7



Electrical Composition Corresponding to Codes M2 and M8



Electrical Composition Corresponding to Codes M6 and P2



Electrical Composition Corresponding to Codes M5, M10, MF1, MR1 and MF2



Legend

Single contact



Double contact



Light block




Possible location



Technical Illustration

Dimensions

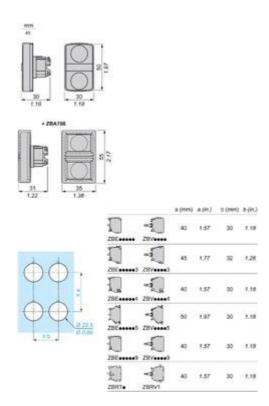

Offer Marketing Illustration

Product benefits / Features



15

Offer Marketing Illustration

Product benefits / Features

16

Technical Benefits

Harmony XB4



Offer Marketing Illustration

Product benefits / Features



Image of product / Alternate images

Alternative











