


ACTUAL SIZE

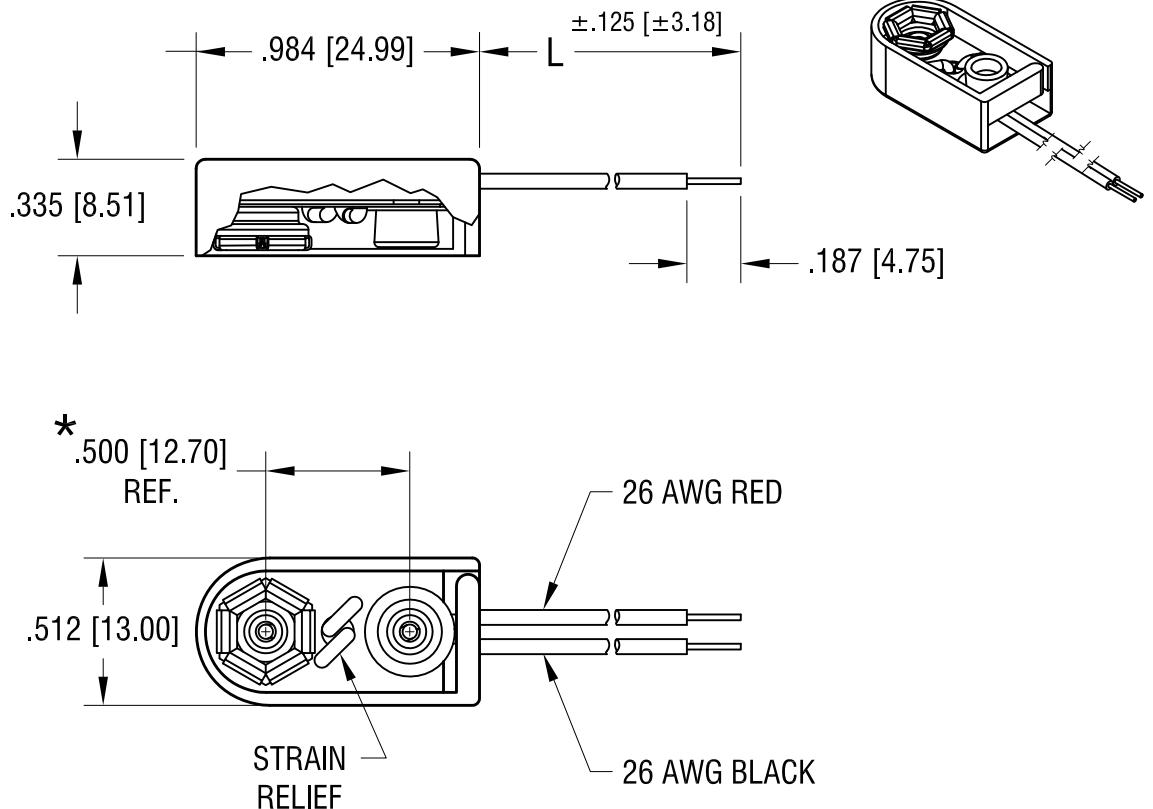

NOTES:

1. WIRE: 26 AWG, 1007 UL/CSA APPROVED
.052 [1.32] O.D. PVC INSULATION.
RED WIRE CONNECTED TO FEMALE CONTACT;
BLACK WIRE TO MALE CONTACT.
2. BASE: MAT'L- ABS
3. CONTACT: MAT'L- BRASS
FINISH - NICKEL PLATE
4. EYELET: MAT'L- BRASS
5. * REF. DIMENSION MUST FIT
INDUSTRY STANDARD 9 VOLT BATTERY.

PART NO.	'L' DIM.
84-4	4.000 [101.60]
84-6	6.000 [152.40]
84-8	8.000 [203.20]

KEYSTONE ELECTRONICS CORP.

www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

8.08.25	UPDATED TOLERANCES.	D	PART NAME SHIELDED 9 VOLT 'I' TYPE BATTERY STRAP		
8.23.11	TOLERANCE FOR C1,C2 ,C3 WAS ±.010 ECR 21-093 ADD NOTE 5.	C	MATERIAL AS NOTED		
11.10.03	CHANGE AS PER ECN 03-082	B	FINISH AS NOTED		
4.1.98	CHANGE AS PER ECN 03-082	A	DRN BY NT APP'D RH		
DATE	DESCRIPTION	REV.	DECIMAL ANGULAR UNLESS OTHERWISE SPECIFIED	SCALE 1.5X	DATE 5.2.96 DWG NO. C 84-