
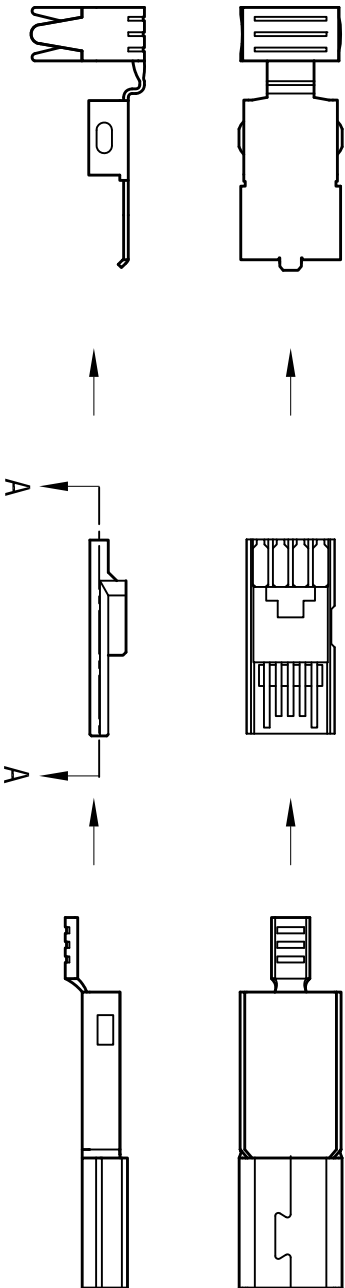


DATE	DESCRIPTION	REV.
5.31.11	CHANGE AS PER ECN 11-072	A
7.28.20	CHANGE AS PER ECN 20-069 UPDATE REAR SHELL	B
2.25.25	CHANGE AS PER PCN 25-008. ADDED PACKAGING DETAILS.	C

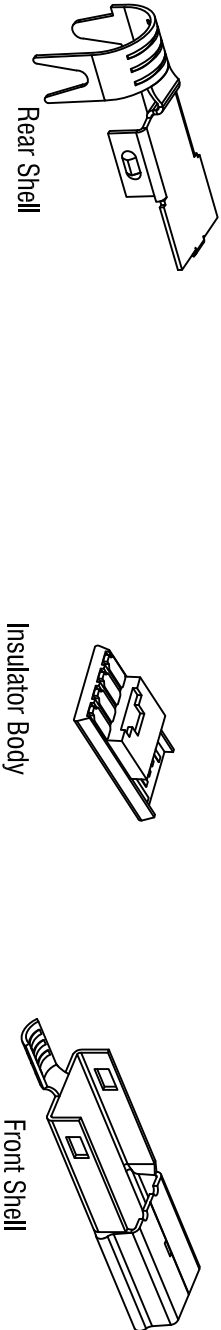

NOTE:

SHELL: MAT'L- STEEL

FINISH: TIN OVER NICKEL PLATING

INSULATION: THERMOPLASTIC, UL 94V-0

CONTACT: MAT'L- PHOSPHOR BRONZE

FINISH: GOLD PLATE ON CONTACT AREA

TIN OVER NICKEL ON SOLDER TAILS

ELECTRICAL CHARACTERISTICS:

CONTACT RESISTANCE: 30m Ω max.

INSULATION RESISTANCE: 1000 MEGA Ω min.

DIELECTRIC WITHSTANDING VOLTAGE : 500 V AC

PACKAGING DETAILS: 100 PIECES PER BAG.

THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.

KEYSTONE ELECTRONICS CORP.				
www.keyleco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500				
PART NAME				
USB MINI PLUG				
MATERIAL				
AS NOTED				
FINISH		DRN BY		DATE
AS NOTED		BOONE		7.28.20
TOLERANCES		APPD	SCALE	
DECIMAL ± .015 [± 0.38]		RH	2X	
ANGULAR ± 1°		DWG. NO.		
UNLESS OTHERWISE SPECIFIED		935		
CODE				
C				