



DATE	DESCRIPTION	REV.
6.01.11	CHANGE AS PER ECN 11-076	A
3.26.15	CHANGE AS PER ECN 15-040 B1 WAS 1.008 [25.60]	B
9.01.16	CHANGE AS PER ECN 16-082 UPDATE SHELL	C
12.06.21	CHANGE AS PER ECN 21-181 D1 WAS 30mm ±2.0mm	D
2.25.25	CHANGE AS PER PCN 25-013 ADDED PACKAGING DETAILS.	E


ASSEMBLED PLUG





REAR SHELL



INSERTED BODY



FRONT SHELL

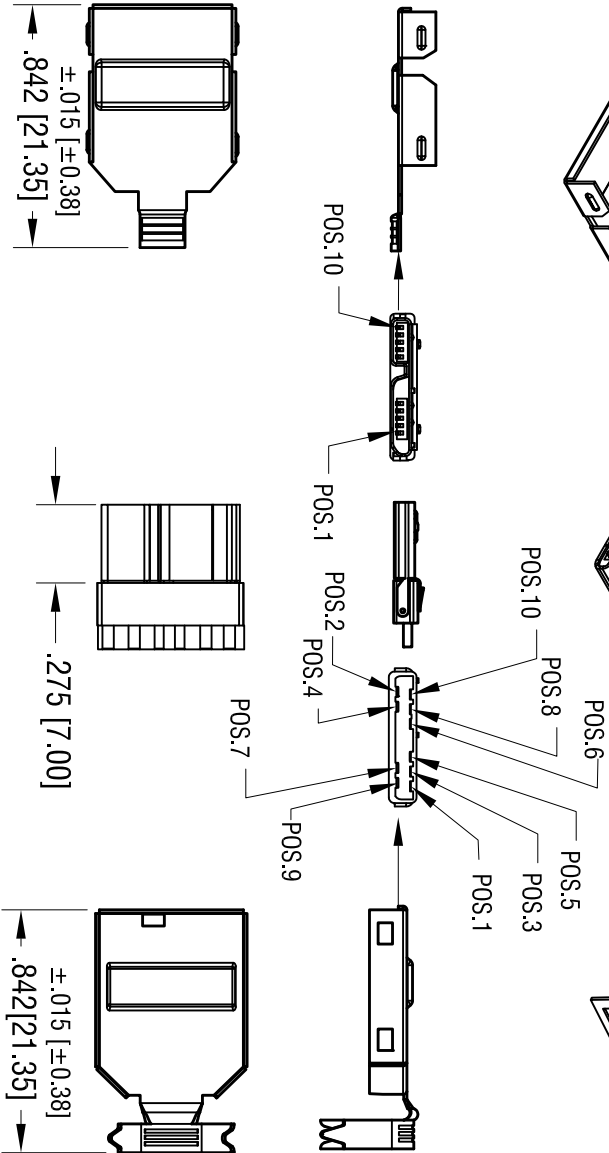

PLUG SPECIFICATIONS:

SHELL: MAT'L- STEEL

FINISH- NICKEL PLATE

CONTACT: MAT'L- PHOSPHOR BRONZE

FINISH- GOLD FLASH OVER NICKEL

INSULATION: MAT'L- THERMOPLASTIC, UL 94V-0

ELECTRICAL CHARACTERISTICS:

RATED VOLTAGE: 30V (RMS)

CONTACT CURRENT RATING: 1.0 Amp DC MAX.

CONTACT RESISTANCE: 50m Ω max.



DIELECTRIC WITHSTANDING VOLTAGE: AC 100 V R.M.S.

MECHANICAL CHARACTERISTICS:

OPERATING TEMPERATURE: -13°F (-25°C) TO 176°F (+80°C)

DURABILITY: 1500 CYCLES MIN.

PACKAGING DETAILS: 100 PIECES PER BAG.

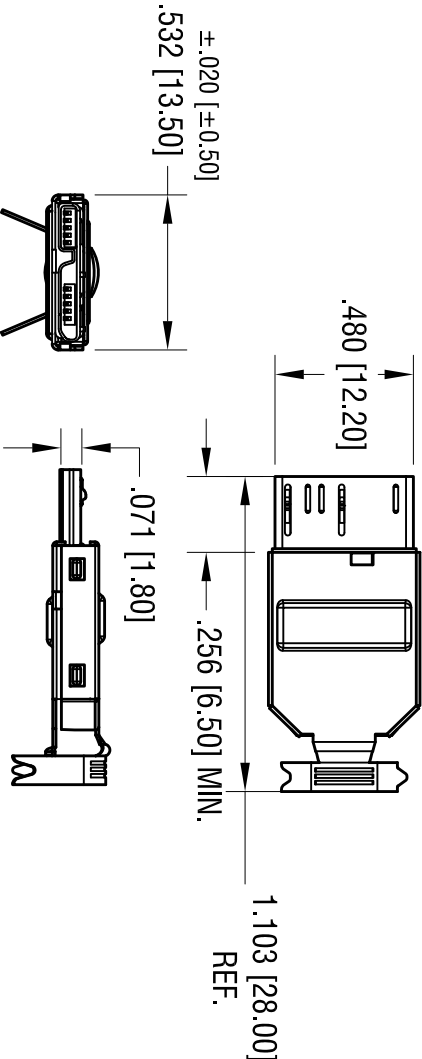

KEYSTONE ELECTRONICS CORP.

www.keystoneelectronics.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

PART NAME

USB 3.0 MICRO PLUG

MATERIAL

AS NOTED

FINISH

AS NOTED

THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.

TOLERANCES	INCH	MM	CODE	DWG NO.
DECIMAL	$\pm .010$	[± 0.25]	C	957
ANGULAR	$\pm 1^\circ$			