

Low Skew, Low Additive Jitter, 4 Output LVPECL/LVDS/ HCSL Fanout Buffer with One LVC MOS Output

Features

- 3-to-1 Input Multiplexer: Two Inputs Accept Any Differential (LVPECL, HCSL, LVDS, SSTL, CML, LVC MOS) or a Single-Ended Signal and the Third Input Accepts a Crystal or a Single-Ended Signal
- Four Differential LVPECL/LVDS/HCSL Outputs
- One LVC MOS Output
- Ultra-Low Additive Jitter: 24 fs (Integration Band: 12 kHz to 20 MHz at 625 MHz Clock Frequency)
- Supports Clock Frequencies from 0 to 1.6 GHz
- Supports 2.5V or 3.3V Power Supplies for LVPECL/LVDS/HCSL Outputs
- Supports 1.5V, 1.8V, 2.5V, or 3.3V on LVC MOS Output
- Embedded Low Dropout (LDO) Voltage Regulator Provides Superior Power Supply Noise Rejection
- Maximum Output to Output Skew of 40 ps
- Device Controlled via Control Pins

Applications

- PCIe Gen1/2/3/4/5/6 Clock Distribution
- Low-Jitter Clock Trees
- Logic Translation
- Clock and Data Signal Restoration
- Wired Communications: OTN, SONET/SDH, GE, 10GE, FC and 10G FC
- General Purpose Clock Distribution
- Wireless Communications
- High Performance Microprocessor Clock Distribution
- Test Equipment

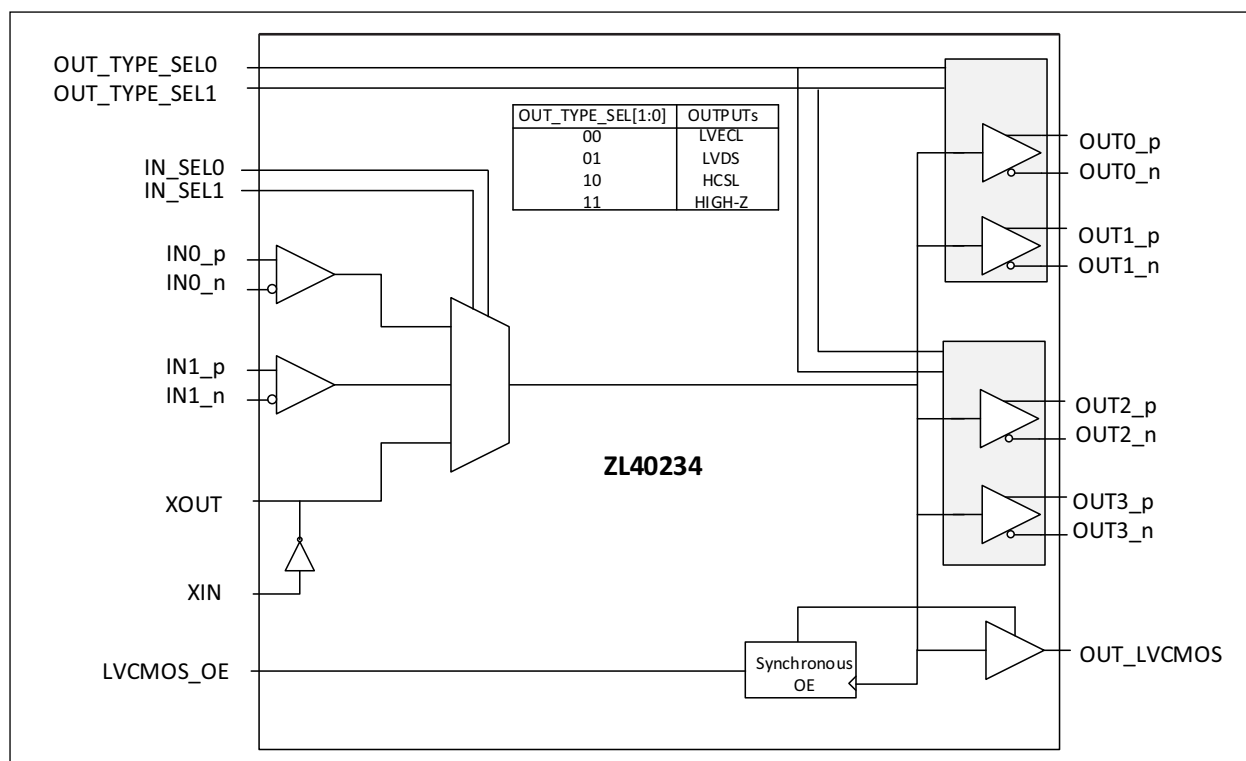


FIGURE 0-1: Functional Block Diagram.

TO OUR VALUED CUSTOMERS

It is our intention to provide our valued customers with the best documentation possible to ensure successful use of your Microchip products. To this end, we will continue to improve our publications to better suit your needs. Our publications will be refined and enhanced as new volumes and updates are introduced.

If you have any questions or comments regarding this publication, please contact the Marketing Communications Department via E-mail at docerrors@microchip.com. We welcome your feedback.

Most Current Data Sheet

To obtain the most up-to-date version of this data sheet, please register at our Worldwide Web site at:

<http://www.microchip.com>

You can determine the version of a data sheet by examining its literature number found on the bottom outside corner of any page. The last character of the literature number is the version number, (e.g., DS30000000A is version A of document DS30000000).

Errata

An errata sheet, describing minor operational differences from the data sheet and recommended workarounds, may exist for current devices. As device/documentation issues become known to us, we will publish an errata sheet. The errata will specify the revision of silicon and revision of document to which it applies.

To determine if an errata sheet exists for a particular device, please check with one of the following:

- Microchip's Worldwide Web site; <http://www.microchip.com>
- Your local Microchip sales office (see last page)

When contacting a sales office, please specify which device, revision of silicon and data sheet (include -literature number) you are using.

Customer Notification System

Register on our web site at www.microchip.com to receive the most current information on all of our products.

TABLE OF CONTENTS

1.0 “Pin Description And Configuration”	6
1.1 “Pin Descriptions”	7
2.0 “Functional Description”	9
2.1 “Clock Inputs”	9
2.2 “Clock Outputs”	11
2.3 “Crystal Oscillator Input”	12
2.4 “Termination of Unused Inputs and Outputs”	12
2.5 “Power Consumption”	12
2.6 “Power Supply Filtering”	13
2.7 “Power Supplies and Power-Up Sequence”	13
2.8 “Device Control”	14
3.0 “Typical Device Performance”	15
4.0 “Electrical Characteristics”	19
5.0 “Package Outline”	33
5.1 “Package Marking Information”	33
Appendix A: “Data Sheet Revision History”	38
“Product Identification System”	39

List of Figures

FIGURE 0-1: "Functional Block Diagram."	1
FIGURE 1-1: "32-Lead 5 mm x 5 mm VQFN."	6
FIGURE 2-1: "Input Driven by a Single-Ended Output."	9
FIGURE 2-2: "Input Driven by DC-Coupled LVPECL Output."	9
FIGURE 2-3: "Input Driven by DC-Coupled LVPECL Output (Alternative Termination)."	10
FIGURE 2-4: "Input Driven by AC-Coupled LVPECL Output."	10
FIGURE 2-5: "Input Driven by HCSL Output."	10
FIGURE 2-6: "Input Driven by LVDS Output."	10
FIGURE 2-7: "Input Driven by an SSTL Output."	11
FIGURE 2-8: "Termination for LVCMOS Output."	11
FIGURE 2-9: "Driving a Load via Transformer."	11
FIGURE 2-10: "Crystal Oscillator Circuit."	12
FIGURE 2-11: "Power Supply Filtering."	13
FIGURE 3-1: "156.25 MHz LVPECL."	15
FIGURE 3-2: "1.5 GHz LVPECL."	15
FIGURE 3-3: "156.25 MHz LVDS."	15
FIGURE 3-4: "1.5 GHz LVDS."	15
FIGURE 3-5: "100 MHz HCSL."	15
FIGURE 3-6: "250 MHz HCSL."	15
FIGURE 3-7: "I/O Delay vs. Temperature."	16
FIGURE 3-8: "PSNR vs. Noise Frequency."	16
FIGURE 3-9: "100 MHz LVPECL Phase Noise."	16
FIGURE 3-10: "100 MHz LVDS Phase Noise."	16
FIGURE 3-11: "25 MHz LVDS Phase Noise in XTAL Mode."	16
FIGURE 3-12: "100 MHz HCSL Phase Noise."	16
FIGURE 3-13: "156.25 MHz LVPECL Phase Noise."	17
FIGURE 3-14: "625 MHz LVPECL Phase Noise."	17
FIGURE 3-15: "156.25 MHz LVDS Phase Noise."	17
FIGURE 3-16: "625 MHz LVDS Phase Noise."	17
FIGURE 3-17: "Output RMS Jitter (12 kHz to 20 MHz) vs. Input Clock Slew Rate."	17
FIGURE 3-18: "Output Clock Noise Floor vs. Input Clock Slew Rate."	17
FIGURE 3-19: "Output RMS Jitter (12 kHz to 20 MHz) vs. Input Clock Slew Rate."	18
FIGURE 3-20: "Output Clock Noise Floor vs. Input Clock Slew Rate."	18
FIGURE 3-21: "Output RMS Jitter (12 kHz to 20 MHz) vs. Input Clock Slew Rate."	18
FIGURE 3-22: "Output Clock Noise Floor vs. Input Clock Slew Rate."	18
FIGURE 4-1: "Differential Input Voltage Levels."	20
FIGURE 4-2: "Differential Output Voltage Levels."	24

List of Tables

TABLE 1-1: “Pin Description”	7
TABLE 2-1: “Input Clock Selection”	14
TABLE 2-2: “Output Type Selection”	14
TABLE 4-1: “Absolute Maximum Ratings”	19
TABLE 4-2: “Recommended Operating Conditions”	19
TABLE 4-3: “Current Consumption”	19
TABLE 4-4: “Input Characteristics”	20
TABLE 4-5: “Crystal Oscillator Characteristics”	21
TABLE 4-6: “Power Supply Rejection Ratio for VDD = VDDO = 3.3V”	21
TABLE 4-7: “Power Supply Rejection Ratio for VDD = VDDO = 2.5V”	22
TABLE 4-8: “LVCMOS Output Characteristics for VDDO = 3.3V”	22
TABLE 4-9: “LVCMOS Output Characteristics for VDDO = 2.5V”	23
TABLE 4-10: “LVPECL Output Characteristics for VDDO = 3.3V”	24
TABLE 4-11: “LVPECL Output Characteristics for VDDO = 2.5V”	25
TABLE 4-12: “LVDS Outputs for VDDO = 3.3V”	26
TABLE 4-13: “LVDS Outputs for VDDO = 2.5V”	26
TABLE 4-14: “HCSL Outputs for VDDO = 3.3V”	27
TABLE 4-15: “HCSL Outputs for VDDO = 2.5V”	28
TABLE 4-16: “LVCMOS Output Phase Noise with 25 MHz XTAL”	29
TABLE 4-17: “LVPECL Output Phase Noise with 25 MHz XTAL”	30
TABLE 4-18: “LVDS Output Phase Noise with 25 MHz XTAL”	30
TABLE 4-19: “HCSL Output Phase Noise with 25 MHz XTAL”	31

ZL40234

1.0 PIN DESCRIPTION AND CONFIGURATION

The ZL40234 is packaged in a 5 mm x 5 mm, 32-lead VQFN.

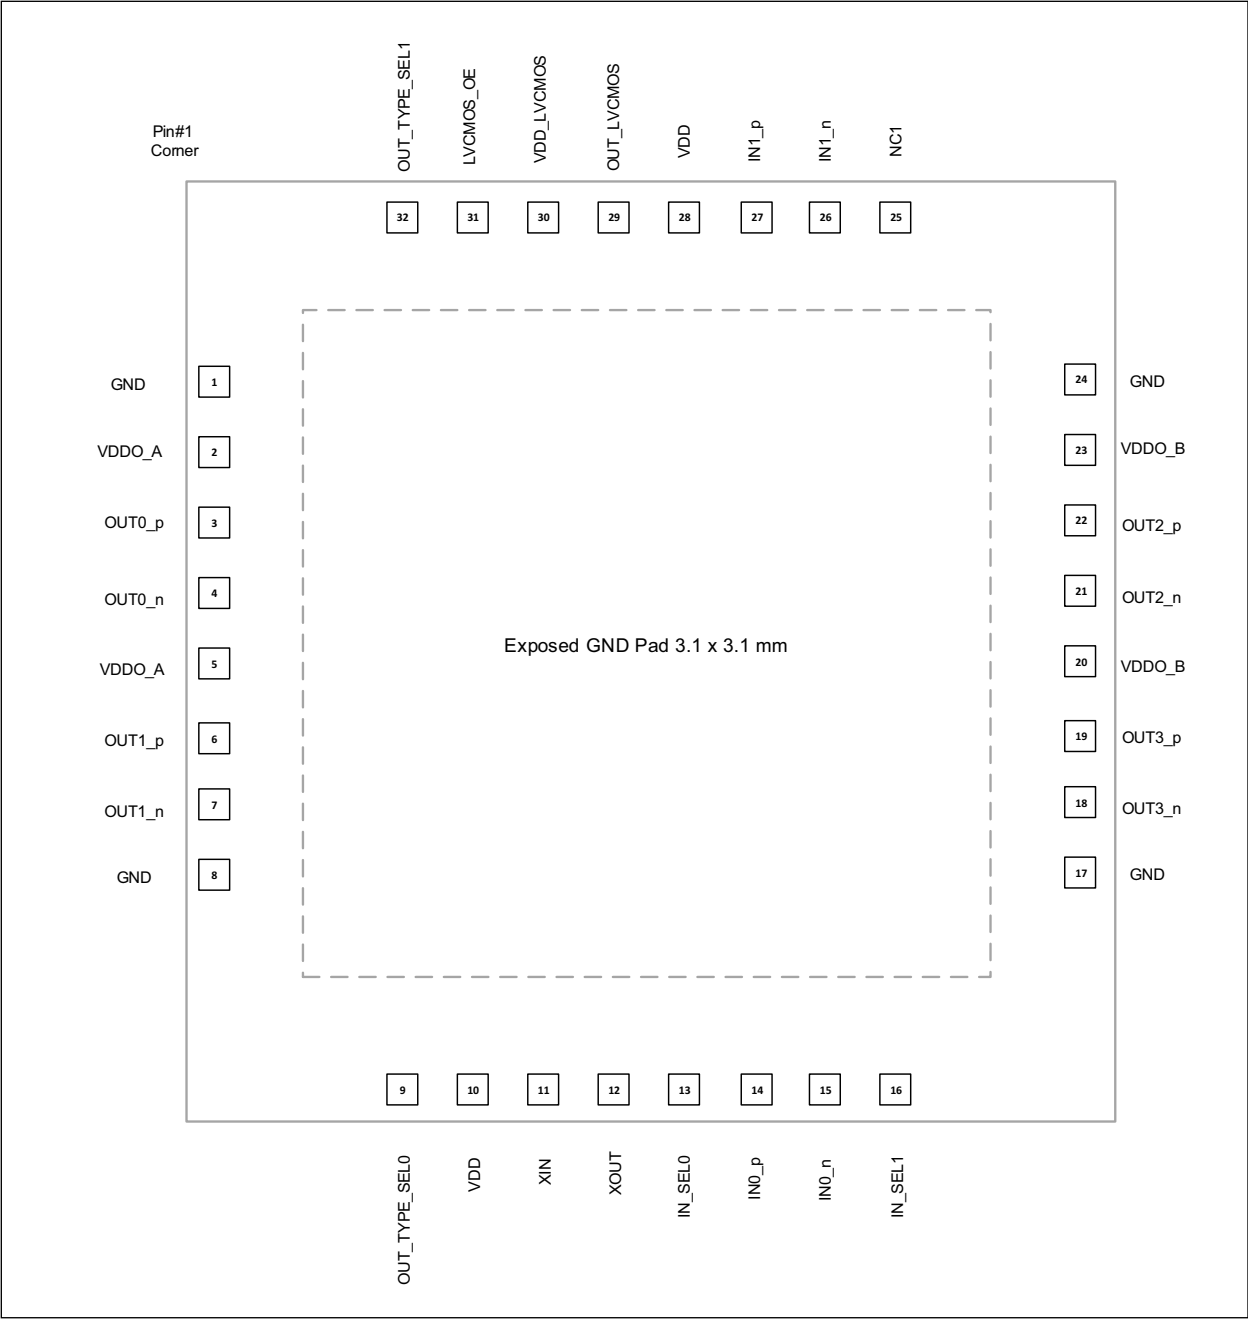


FIGURE 1-1: 32-Lead 5 mm x 5 mm VQFN.

1.1 Pin Descriptions

All device inputs and outputs are LVPECL unless described otherwise. The I/O column uses the following symbols: I – input, I_{PU} – input with 300 kΩ internal pull-up resistor, I_{PD} – input with 300 kΩ internal pull-down resistor, I_{APU} – input with 31 kΩ internal pull-up resistor, I_{APD} – input with 30 kΩ internal pull-down resistor, I_{APU/APD} – input biased to V_{DD}/2 with 60 kΩ internal pull-up and pull-down resistors (30 kΩ equivalent), O – output, I/O – Input/Output pin, NC – No connect, P – power supply pin.

TABLE 1-1: PIN DESCRIPTION

Pin Number	Pin Name	Type	Description
Input Reference			
40	IN0_p	I _{APD}	Input Differential or Single-Ended References 0 and 1 Input frequency range 0 Hz to 1.6 GHz. Non-inverting inputs (_p) are pulled down with internal 30 kΩ pull-down resistors. Inverting inputs (_n) are pulled up and pulled down with 60 kΩ internal resistors (30 kΩ equivalent) to keep inverting input voltages at V _{DD} /2 when inverting inputs are left floating (device fed with a single-ended reference).
15	IN0_n	I _{APU/APD}	
27	IN1_p	I _{APD}	
26	IN1_n	I _{APU/APD}	
Output Clocks			
3	OUT0_p	O	Ultra-Low Additive Jitter Differential LVPECL/HCSL/LVDS Outputs 0 to 3 Output frequency range 0 Hz to 1.6 GHz Type (LVPECL/HCSL/LVDS/High-Z) of the outputs is controlled by OUT_TYPE_SEL0/1 pins.
4	OUT0_n		
6	OUT1_p		
7	OUT1_n		
22	OUT2_p		
21	OUT2_n		
19	OUT3_p		
18	OUT3_n		
29	OUT_LVCMOS	O	Ultra-Low Additive Jitter LVCMOS Output Output frequency range 0 Hz to 250 MHz

TABLE 1-1: PIN DESCRIPTION (CONTINUED)

Pin Number	Pin Name	Type	Description		
Control					
13 16	IN_SEL0 IN_SEL1	I _{PD}	Input select pins. Logic level on these pins selects which input will be passed to the output.		
			IN_SEL1	IN_SEL0	OUTN
			0	0	Input 0 (IN0)
			0	1	Input 1 (IN1)
			1	0	Crystal Oscillator or Overdrive
1	1	Crystal Bypass			
9 32	OUT_TYPE_SEL0 OUT_TYPE_SEL1	I	Output Signal Level: Selects Type of the outputs (Outputs 0 to 4).		
			OUTA_TYPE_SEL1	OUTA_TYPE_SEL0	Output 0 to 4
			0	0	LVPECL
			0	1	LVDS
			1	0	HCSL
1	1	High-Z (Disabled)			
31	LVC MOS_OE	I	LVC MOS Output Enable: When high, LVC MOS output is enabled. When low, the output is High-Z		
Crystal Oscillator					
11	XIN	I	Crystal Oscillator Input or Crystal Bypass Mode or Crystal Overdrive Mode If crystal oscillator is not used, connect a pull-down to this pin or connect it to ground.		
12	XOUT	O	Crystal Oscillator Output		
No Connect					
25	NC1	NC	No Connect (not connected to the die) Leave unconnected or connect to GND for mechanical support.		
Power and Ground					
10 28	VDD	P	Positive Supply Voltage. Connect to 3.3V or 2.5V supply.		
30	VDD_LVC MOS	P	Positive Supply Voltage for LVC MOS Output Connect to 3.3V, 2.5V, 1.8V, or 1.5V supply.		
2 5	VDDO_A	P	Positive Supply Voltage for Differential Outputs Bank A Connect to 3.3V or 2.5V power supply. VDDO_A does not have to be connected to the same voltage level as VDD or VDDO_B. These pins power up differential outputs OUT0_p/n and OUT1_p/n.		
23 23	VDDO_B	P	Positive Supply Voltage for Differential Outputs Bank B Connect to 3.3V or 2.5V power supply. VDDO_B does not have to be connected to the same voltage level as VDD or VDDO_A. These pins power up differential outputs OUT2_p/n and OUT3_p/n.		
1 8 17 24	GND	P	Ground. Connect to ground.		
ePad	GND	P	Ground. Connect to ground.		

2.0 FUNCTIONAL DESCRIPTION

The ZL40234 is a pin-configurable low additive jitter, low power 3 x 4 LVPECL/HCSL/LVDS fanout buffer.

Two inputs can accept signal in differential (LVPECL, SSTL, LVDS, HSTL, CML) or single-ended (LVPECL or LVCMOS) format and the third input can accept a single-ended signal or it can be used to build a crystal oscillator by connecting an external crystal resonator between its XIN and XOUT pins.

The ZL40234 has four LVPECL/HCSL/LVDS outputs in two banks and each bank can independently be powered from a 3.3V or 2.5V supply. Differential outputs can be set to be LVPECL, LVDS, HCSL, or Hi-Z via control OUT_TYPE_SEL0/1 pins.

The device operates from 2.5V±5% or 3.3V±5% supply. Its operation is ensured over the industrial temperature range of -40°C to +85°C.

2.1 Clock Inputs

The following blocks diagram shows how to terminate different signals fed to the ZL40234 inputs.

Figure 2-1 shows how to terminate a single ended output such as LVCMOS. Resistors Ideally, resistors R1 and R2 should be 100Ω each and $R_O + R_S$ should be 50Ω so that the transmission line is terminated at both ends with characteristic impedance. If the driving strength of the output driver is not sufficient to drive low impedance, the value of series resistor R_S should be increased. This will reduce the voltage swing at the input but this should be fine as long as the input voltage swing requirement is not violated (Table 4-4). The source resistors of $R_S = 270\Omega$ could be used for standard LVCMOS driver. This will provide 516 mV of voltage swing for 3.3V LVCMOS driver with load current of $(3.3V/2) \times (1/(270\Omega + 50\Omega)) = 5.16$ mA.

For optimum performance both differential input pins (_p and _n) need to be DC biased to the same voltage. Hence, the ratio R1/R2 should be equal to the ratio R3/R4.

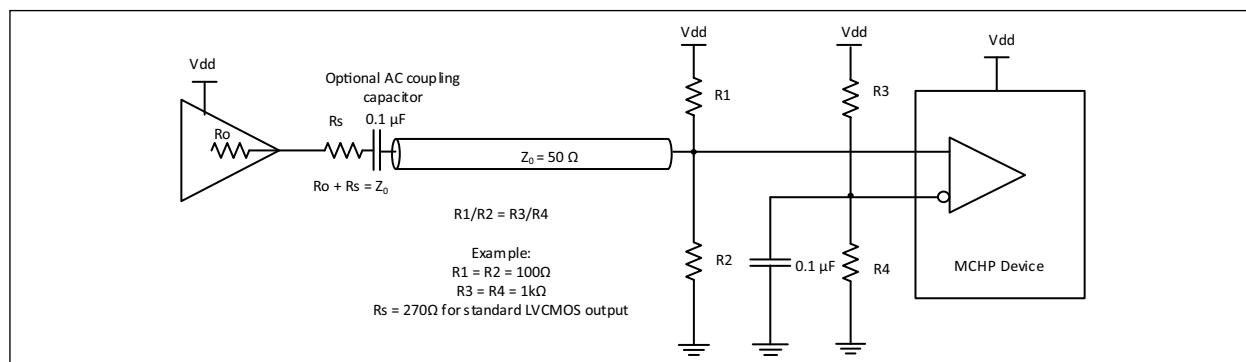


FIGURE 2-1: Input Driven by a Single-Ended Output.

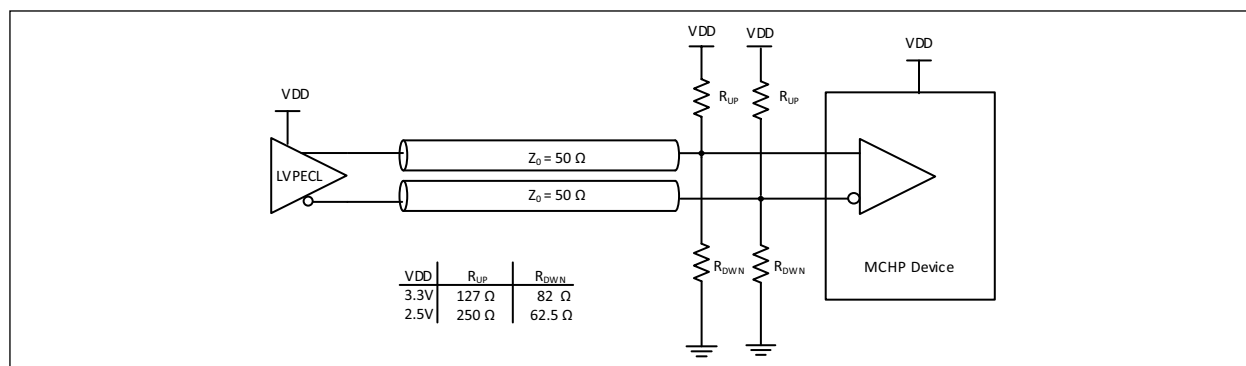


FIGURE 2-2: Input Driven by DC-Coupled LVPECL Output.

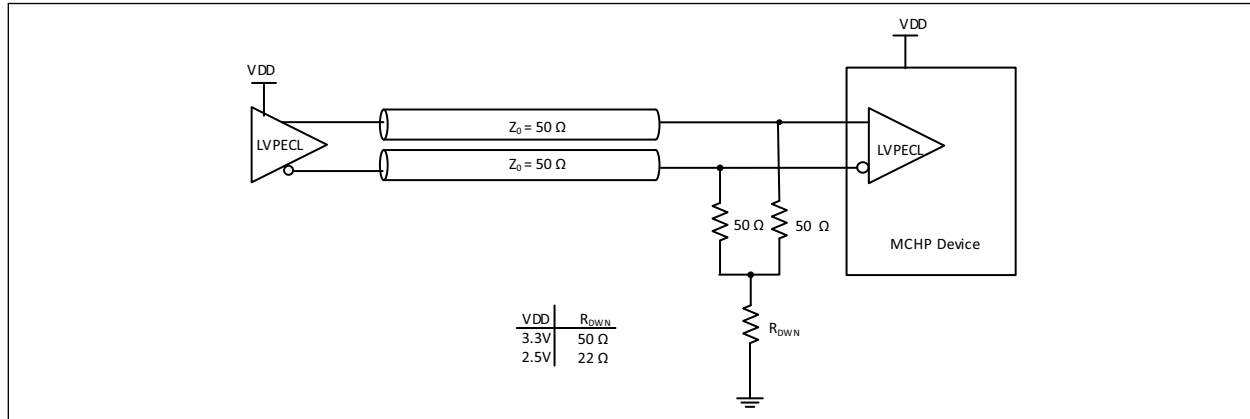


FIGURE 2-3: Input Driven by DC-Coupled LVPECL Output (Alternative Termination).

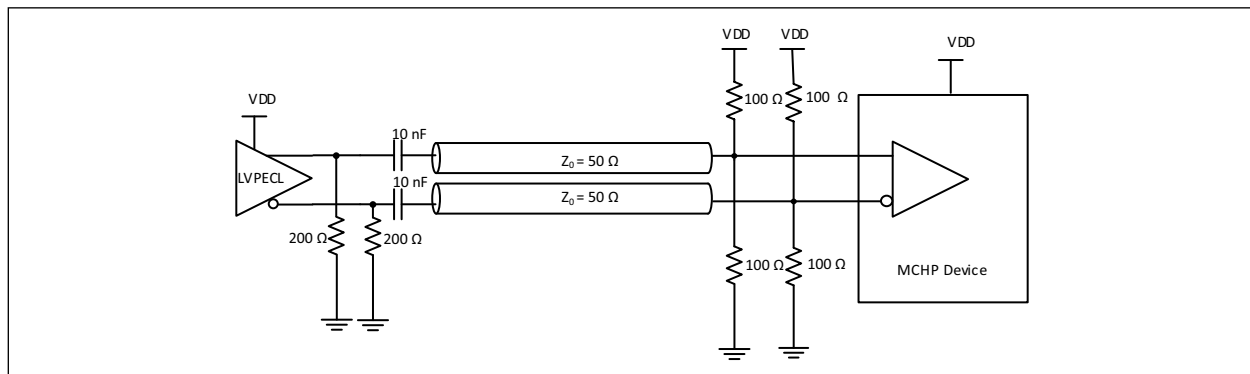


FIGURE 2-4: Input Driven by AC-Coupled LVPECL Output.

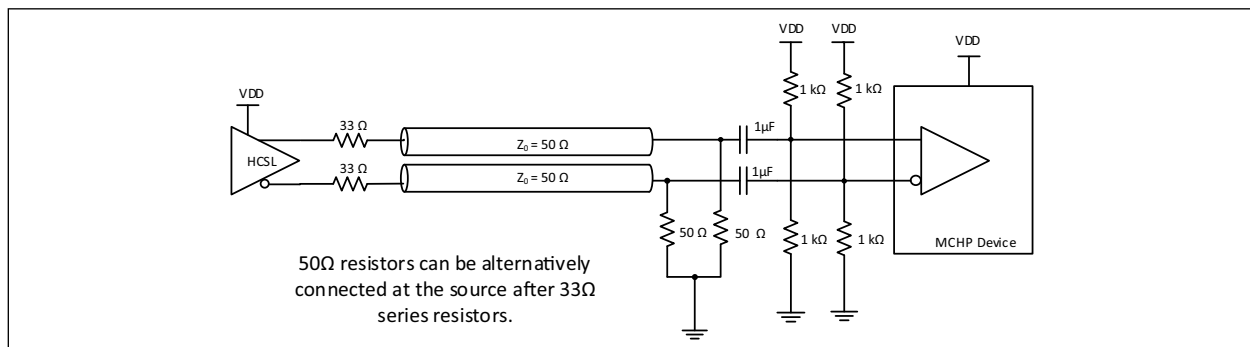


FIGURE 2-5: Input Driven by HCSL Output.

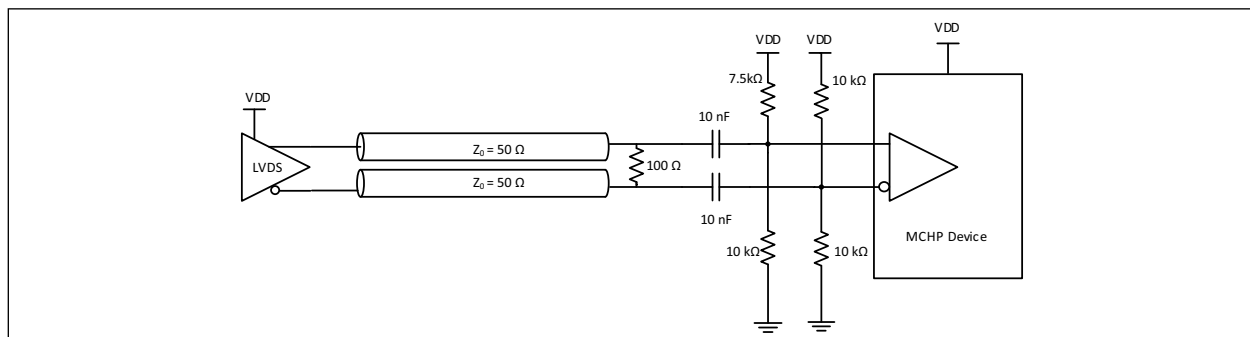


FIGURE 2-6: Input Driven by LVDS Output.

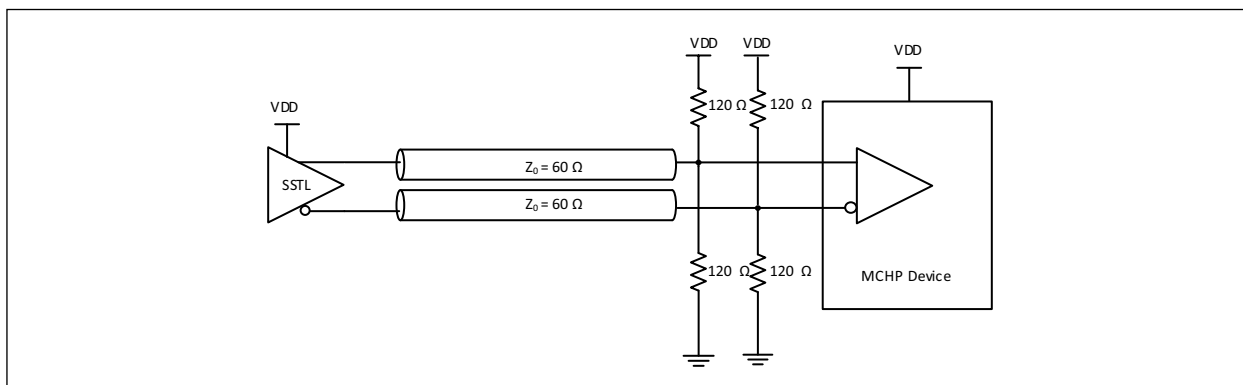


FIGURE 2-7: Input Driven by an SSTL Output.

2.2 Clock Outputs

The LVCMOS output (OUT_LVCMOS) requires only a series termination resistor whose value is dependent on the LVCMOS output voltage as shown in Figure 2-8.

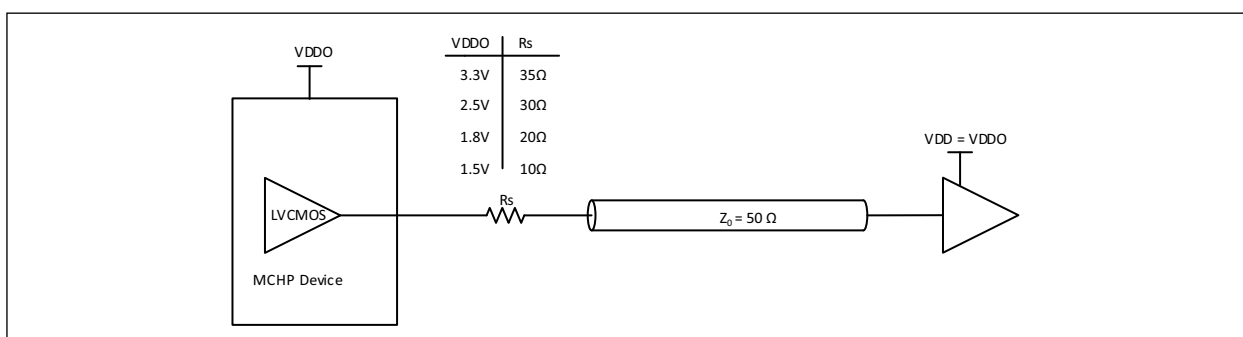


FIGURE 2-8: Termination for LVCMOS Output.

Differential outputs LVPECL and LVDS should have the same termination as their corresponding outputs described in the previous section. HCSL outputs should be terminated with 33Ω series resistors at the source and 50Ω shunt resistors at the source or at the end on the transmission line. AC coupling and re-biasing is not required at the outputs when driving native HCSL receivers.

The device is designed to drive the differential input of semiconductor devices. In applications that use a transformer to convert from the differential to the single-ended output (for example, driving an oscilloscope 50Ω input), a resistor larger than 10Ω should be added at the center tap of the primary winding to achieve optimum jitter performance as shown in Figure 2-9. This is to provide a nominal common mode impedance of 10Ω or higher, which is typical for differential terminations.

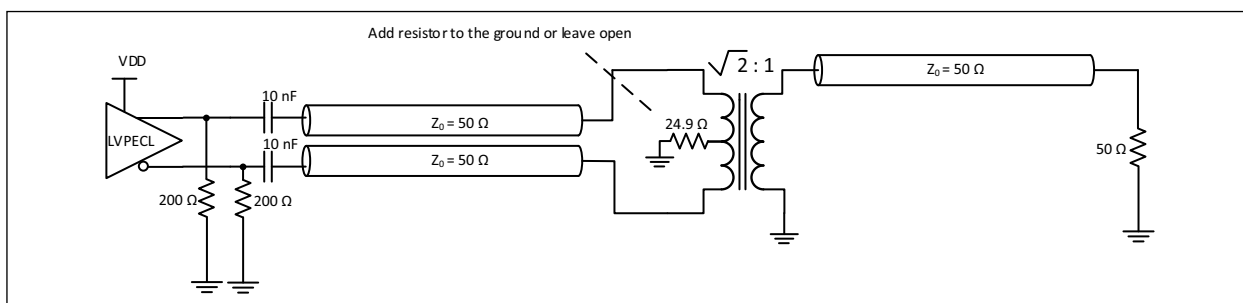


FIGURE 2-9: Driving a Load via Transformer.

2.3 Crystal Oscillator Input

The crystal oscillator circuit can work with crystal resonators from 8 MHz to 60 MHz. Load capacitors C1, C2, and series resistor R_S shall be selected as per crystal vendor recommendation. A shunt resistor is implemented inside the device.

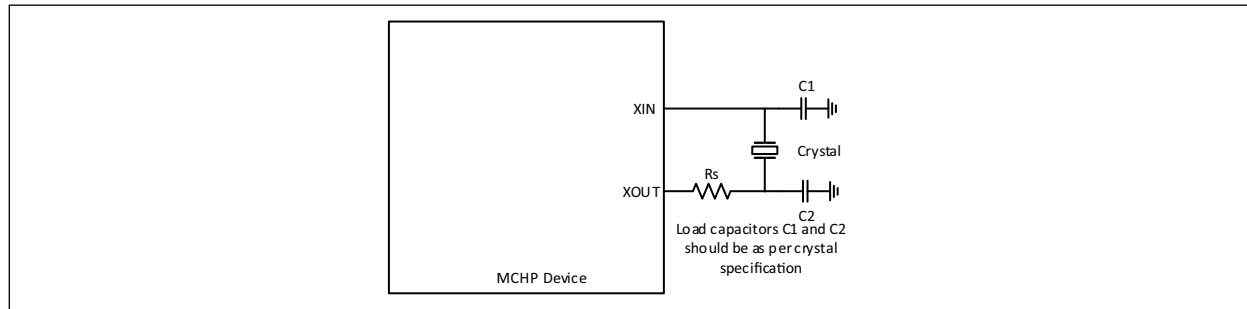


FIGURE 2-10: Crystal Oscillator Circuit.

2.4 Termination of Unused Inputs and Outputs

Unused inputs can be left unconnected or, alternatively, IN_0/1 can be pulled down by a 1 kΩ resistor. Unused outputs should be left unconnected.

2.5 Power Consumption

The device's total power consumption can be calculated as:

EQUATION 2-1:

$$P_T = P_S + P_{XTAL} + P_C + P_{O_DIF} + P_{O_LVCMOS}$$

Where:

$$P_S = V_{DD} \times I_S$$

The core power when the XTAL is not used. The current is specified in [Table 4-3](#). If the XTAL is running, this power should be set to zero.

$$P_{XTAL} = V_{DD} \times I_{DD_XTAL}$$

The core power when the XTAL is used. The current is specified in [Table 4-3](#). If the XTAL is not used, this power should be set to zero.

$$P_C = V_{DDO} \times I_{DD_CM}$$

Common output power shared among all ten outputs. The current I_{DD_CM} is specified [Table 4-3](#).

$$P_{O_DIF} = V_{DDO} \times (I_{DD_LVDS} \times N_1 + I_{DD_LVPECL} \times N_2 + I_{DD_HCSL} \times N_3)$$

Output power where output current (I_{DD_LVDS}) is specified [Table 4-3](#). For LVPECL or HCSL, just replace I_{DD_LVDS} with I_{DD_LVPECL} or I_{DD_HCSL}. N is either 0 (outputs disabled) or 4 (four differential outputs enabled).

$$P_{O_LVCMOS} = V_{DD_LVCMOS} \times (I_{DD} \times f / 100MHz + V_{DD_LVCMOS} \times C_{LOAD} \times f)$$

Dynamic LVCMOS output power. I_{DD} is specified in [Table 4-3](#). If LVCMOS output is disabled, this term is equal to zero.

Power dissipated inside the device can be calculated by subtracting the power dissipated in termination/biasing resistors from the power consumption. For LVDS outputs, the equation is:

EQUATION 2-2:

$$P_D = P_T - N_1 \times P_{LVPECL} - N_2 \times P_{LVDS} - N_3 \times P_{HCSL}$$

$$P_D = P_T - 4 \times P_{LVDS}$$

For LVPECL or HCSL, just replace P_{LVDS} with corresponding P_{LVPECL} or P_{HCSL} below.

$$P_{LVPECL} = (V_{OH} - V_B)^2 / 50\Omega + (V_{OL} - V_B)^2 / 50\Omega + (V_{OH} - V_B) \times V_B / 50\Omega + (V_{OL} - V_B) \times V_B / 50\Omega$$

V_{OH} and V_{OL} are the output high and low voltages respectively for LVPECL output.

V_B is LVPECL bias voltage equal to $V_{DD} - 2V$.

$$P_{LVDS} = V_{SW}^2 / 100\Omega \quad V_{SW} \text{ is the voltage swing of the LVDS output.}$$

$$P_{HCSL} = (V_{SW} / 50\Omega)^2 \times (33\Omega + 50\Omega) \quad V_{SW} \text{ is the voltage swing of the HCSL output. } 50\Omega \text{ is the termination resistance and } 33\Omega \text{ is the series resistance of the HCSL output.}$$

2.6 Power Supply Filtering

Each power pin (VDD and VDDO) should be decoupled with a 0.1 μF capacitor with minimum equivalent series resistance (ESR) and minimum series inductance (ESL). For example, 0402 X5R ceramic capacitors with 6.3V minimum rating could be used. These capacitors should be placed as close as possible to the power pins. To reduce the power noise from adjacent digital components on the board, each power supply could be further insulated with a low resistance ferrite bead with two capacitors. The ferrite bead will also insulate adjacent components from the noise generated by the device. [Figure 2-11](#) shows recommended decoupling for each power pin.

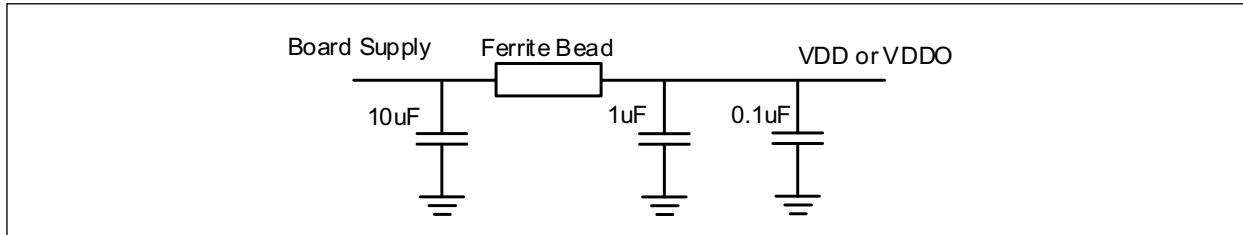


FIGURE 2-11: Power Supply Filtering.

2.7 Power Supplies and Power-Up Sequence

The device has four different power supplies: VDD, VDDO_A, VDDO_B, and VDD_LVCMOS which are mutually independent. Voltages supported by each of these power supplies are specified in [Table 1-1](#).

The device is not sensitive to the power-up sequence. For example, a commonly used sequence where higher voltage comes up before or at the same time as the lower voltages can be used (or any other sequence).

2.8 Device Control

ZL40234 is controlled via Input Select (IN_SEL0/1) pins that select which one of three inputs is fed to the output and show in [Table 2-1](#) and OUT_TYPE_SEL0/1 pins that select signal level (LVPECL, LVDS, HCSL, or Hi-Z) as shown in [Table 2-2](#).

All input control pins have a low input threshold voltage so they can be driven from the device with low output voltage (FPGA/CPLD). Supported voltages are between 1.2V and V_{DD} (2.5V or 3.3V).

TABLE 2-1: INPUT CLOCK SELECTION

IN_SEL1	IN_SEL0	Selected Input
0	0	IN0_p, IN0_n
0	1	IN1_p, IN1_n
1	X	XIN

TABLE 2-2: OUTPUT TYPE SELECTION

OUT_TYPE_SEL1	OUT_TYPE_SEL0	Output
0	0	LVPECL
0	1	LVDS
1	0	HCSL
1	1	High-Z (Output Disabled)

3.0 TYPICAL DEVICE PERFORMANCE

Note: The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.

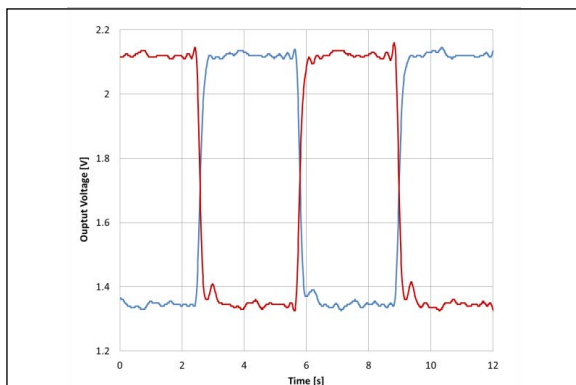


FIGURE 3-1: 156.25 MHz LVPECL.

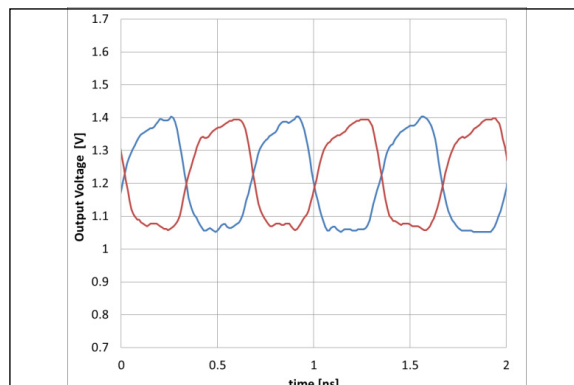


FIGURE 3-4: 1.5 GHz LVDS.

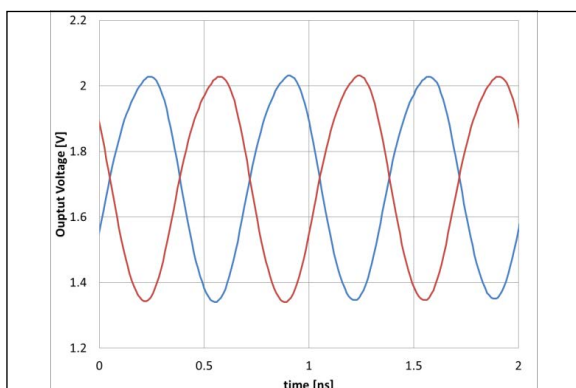


FIGURE 3-2: 1.5 GHz LVPECL.

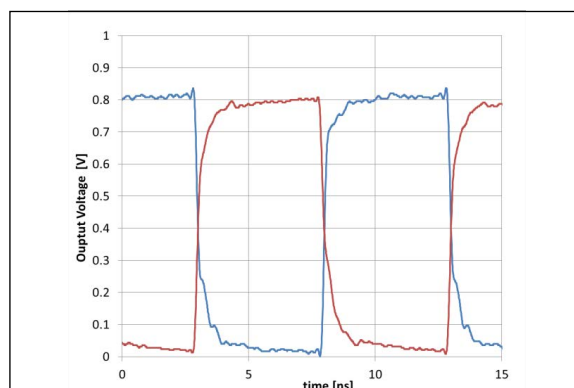


FIGURE 3-5: 100 MHz HCSL.

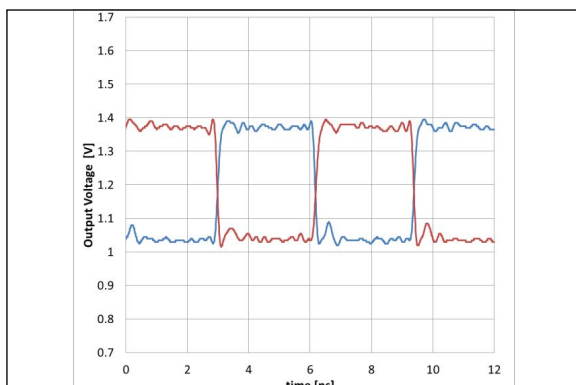


FIGURE 3-3: 156.25 MHz LVDS.

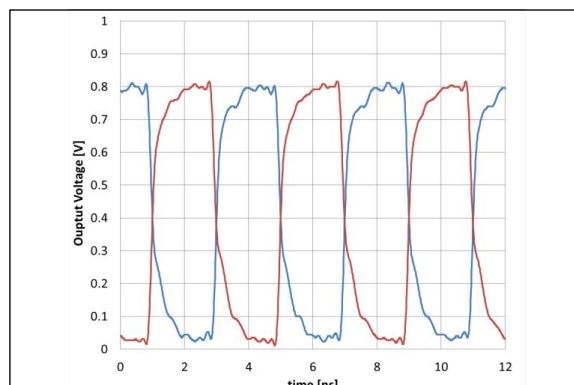


FIGURE 3-6: 250 MHz HCSL.

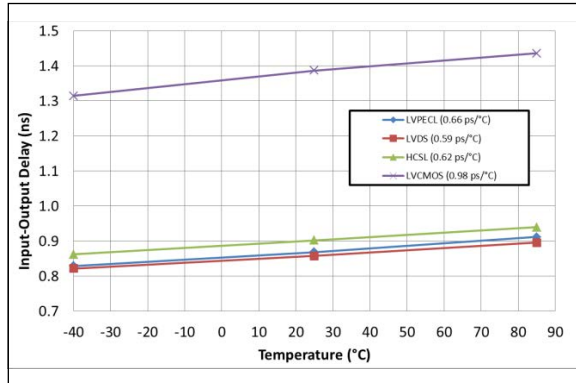


FIGURE 3-7: I/O Delay vs. Temperature.

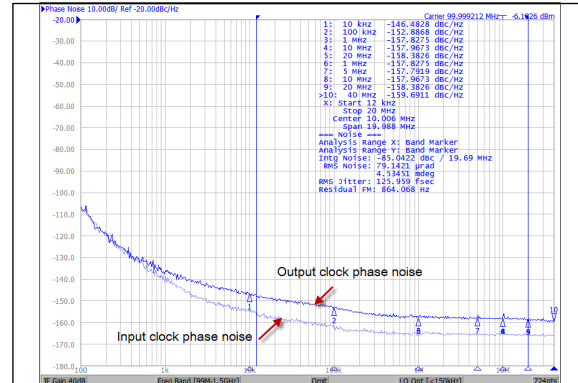


FIGURE 3-10: 100 MHz LVDS Phase Noise.

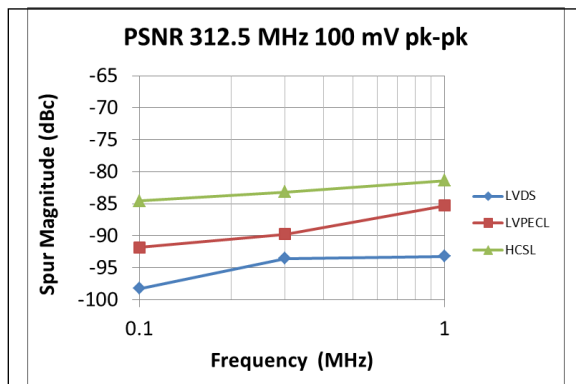


FIGURE 3-8: PSNR vs. Noise Frequency.

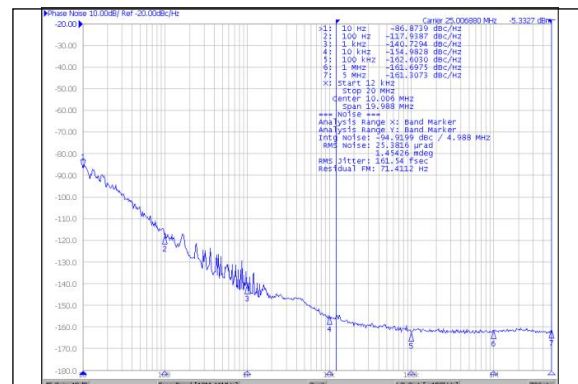


FIGURE 3-11: 25 MHz LVDS Phase Noise in XTAL Mode.

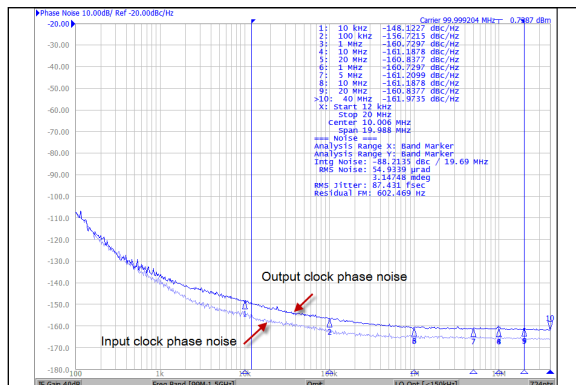


FIGURE 3-9: 100 MHz LVPECL Phase Noise.

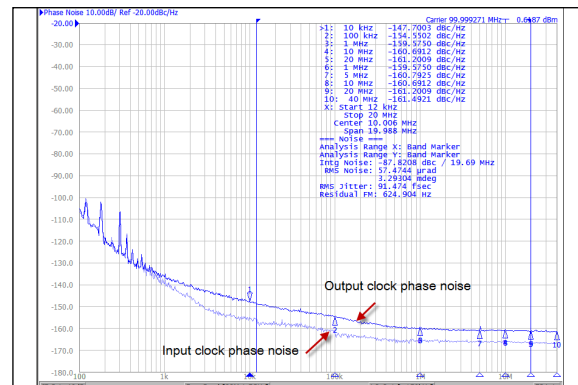


FIGURE 3-12: 100 MHz HCSL Phase Noise.

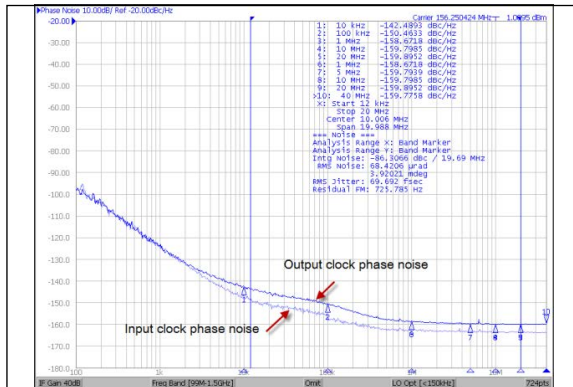


FIGURE 3-13: 156.25 MHz LVPECL Phase Noise.

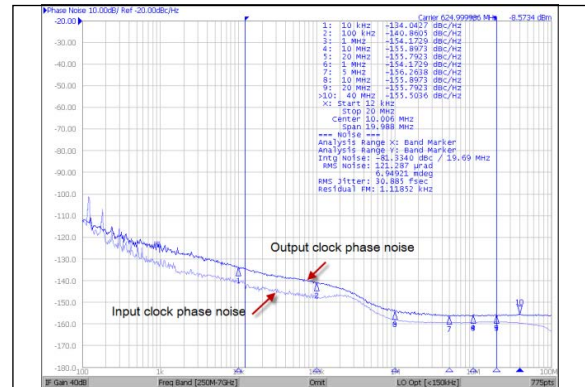


FIGURE 3-16: 625 MHz LVDS Phase Noise.

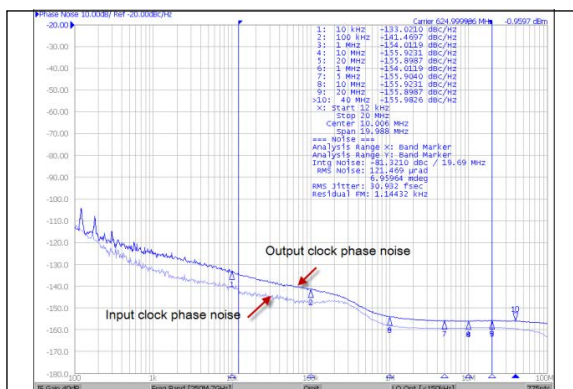


FIGURE 3-14: 625 MHz LVPECL Phase Noise.

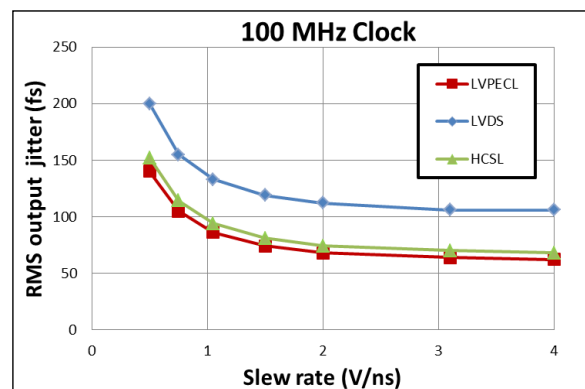


FIGURE 3-17: Output RMS Jitter (12 kHz to 20 MHz) vs. Input Clock Slew Rate.

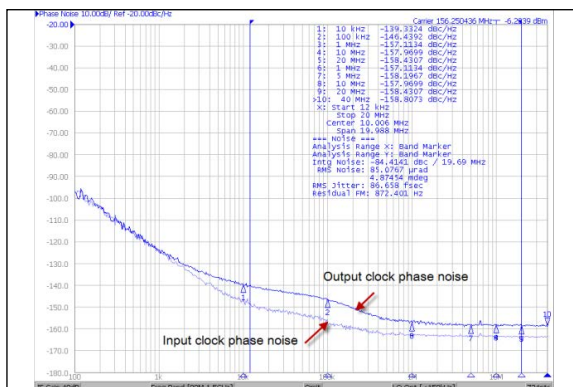


FIGURE 3-15: 156.25 MHz LVDS Phase Noise.

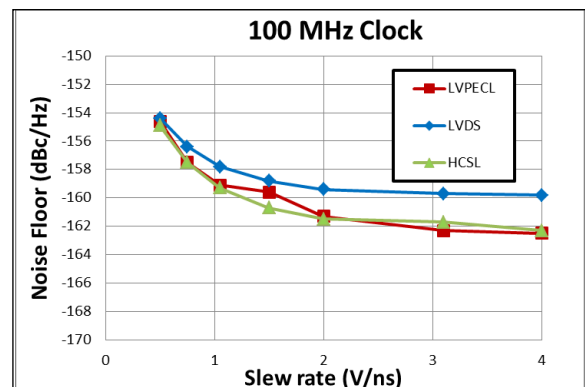


FIGURE 3-18: Output Clock Noise Floor vs. Input Clock Slew Rate.

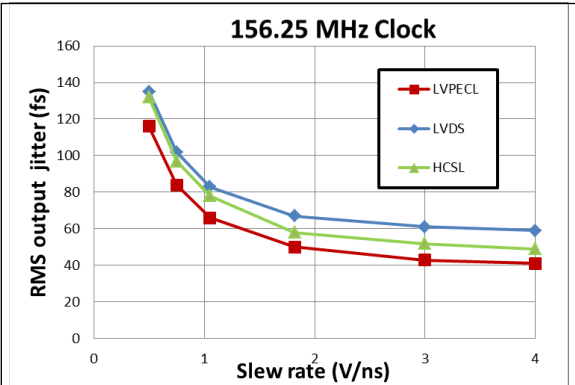


FIGURE 3-19: Output RMS Jitter (12 kHz to 20 MHz) vs. Input Clock Slew Rate.

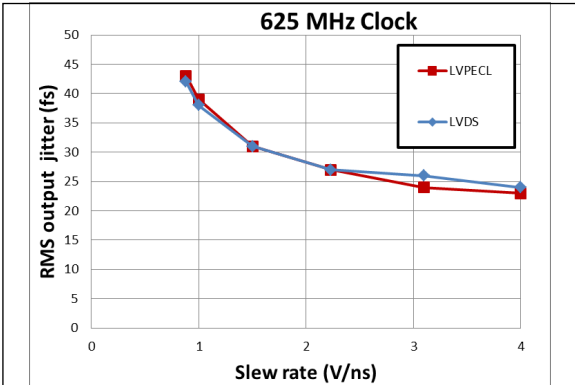


FIGURE 3-21: Output RMS Jitter (12 kHz to 20 MHz) vs. Input Clock Slew Rate.

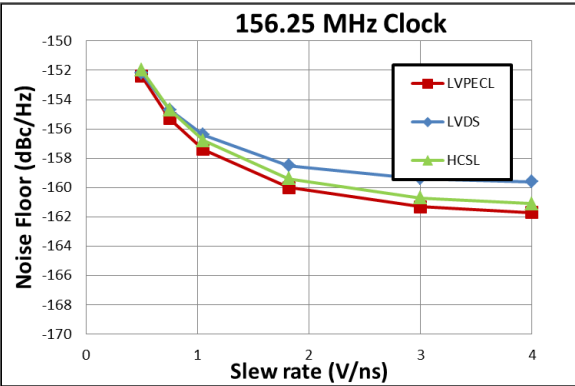


FIGURE 3-20: Output Clock Noise Floor vs. Input Clock Slew Rate.

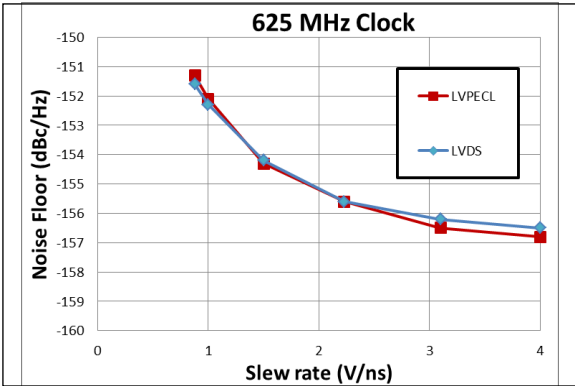


FIGURE 3-22: Output Clock Noise Floor vs. Input Clock Slew Rate.

4.0 ELECTRICAL CHARACTERISTICS

TABLE 4-1: ABSOLUTE MAXIMUM RATINGS

(Note 1, Note 2, Note 3)

Parameter	Symbol	Min.	Max.	Units
Supply Voltage, 3.3V	V_{DD}/V_{DDO}	-0.5	4.6	V
Supply Voltage, 2.5V	V_{DD}/V_{DDO}	-0.5	3.5	V
Storage Temperature Range	T_{ST}	-55	125	°C

Note 1: Exceeding these values may cause permanent damage.

2: Functional operation under these conditions is not implied.

3: Voltages are with respect to ground (GND) unless otherwise stated.

TABLE 4-2: RECOMMENDED OPERATING CONDITIONS

(Note 1, Note 2)

Parameter	Symbol	Min.	Typ.	Max.	Units
Supply Voltage, 3.3V	$V_{DD}/V_{DDO}/V_{DD_LVCMOS}$	3.135	3.30	3.465	V
Supply Voltage, 2.5V	$V_{DD}/V_{DDO}/V_{DD_LVCMOS}$	2.375	2.50	2.625	V
Supply Voltage, 1.8V	V_{DD_LVCMOS}	1.6	1.8	2.0	V
Supply Voltage, 1.5V	V_{DD_LVCMOS}	1.35	1.5	1.65	V
Operating Temperature	T_A	-40	+25	+85	°C
Input Voltage	V_{DD-IN}	-0.3	—	$V_{DD} + 0.3$	V

Note 1: Voltages are with respect to ground (GND) unless otherwise stated.

2: The device core supports two power supply modes (3.3V and 2.5V).

TABLE 4-3: CURRENT CONSUMPTION

Parameter	Symbol	Min.	Typ.	Max.	Units	Condition
Core device current (all outputs and XTAL disabled)	$I_{S_3.3V}$	—	163	197	mA	$V_{DD} = 3.3V+5\%$
	$I_{S_2.5V}$	—	153	187	mA	$V_{DD} = 2.5V+5\%$
Core device current (all outputs disabled) XTAL circuit enabled with 25 MHz Crystal connected between XIN and XOUT	$I_{DD_XTAL_3.3V}$	—	128	154	mA	$V_{DD} = 3.3V+5\%$
	$I_{DD_XTAL_2.5V}$	—	124	150	mA	$V_{DD} = 2.5V+5\%$
Common output current	$I_{DD_CM_3.3V}$	—	13.44	15.05	mA	$V_{DDO} = 3.3V+5\%$
	$I_{DD_CM_2.5V}$	—	12.18	13.65	mA	$V_{DDO} = 2.5V+5\%$
Dynamic LVCMOS output current (f = 100 MHz) Needs to be scaled for different frequencies by f/100 MHz	$I_{DD_3.3V}$	—	2.38	2.68	mA	$V_{DDO} = 3.3V+5\%$
	$I_{DD_2.5V}$	—	1.74	1.96	mA	$V_{DDO} = 2.5V+5\%$
Current dissipation per LVPECL output	$I_{DD_LVPECL_3.3V}$	—	19.36	23.26	mA	$V_{DDO} = 3.3V+5\%$
	$I_{DD_LVPECL_2.5V}$	—	19.38	22.17	mA	$V_{DDO} = 2.5V+5\%$
Current dissipation per LVDS output	$I_{DD_LVDS_3.3V}$	—	6.73	8.00	mA	$V_{DDO} = 3.3V+5\%$
	$I_{DD_LVDS_2.5V}$	—	6.87	7.83	mA	$V_{DDO} = 2.5V+5\%$
Current dissipation per HCSL output	$I_{DD_HCSL_3.3V}$	—	16.43	19.87	mA	$V_{DDO} = 3.3V+5\%$
	$I_{DD_HCSL_2.5V}$	—	17.14	19.18	mA	$V_{DDO} = 2.5V+5\%$

TABLE 4-4: INPUT CHARACTERISTICS

Note 1, Note 2, Note 3

Parameter	Symbol	Min.	Typ.	Max.	Units	Condition
CMOS high-level input voltage for control inputs	V_{CIH}	1.05	—	—	V	—
CMOS low-level input voltage for control inputs	V_{CIL}	—	—	0.45	V	—
CMOS input leakage current for control inputs (includes current due to pull-down resistors)	I_{IL}	–25	—	50	μA	$V_I = V_{DD}$ or 0V
Differential input common mode voltage for IN0_p/n and IN1_p/n	V_{CM}	1	—	2	V	—
Differential input voltage difference for IN0_p/n and IN1_p/n, $f \leq 1$ GHz (Note 4)	V_{ID}	0.15	—	1.3	V	—
Differential input voltage difference for IN0_p/n and IN1_p/n for $1 \text{ GHz} < f \leq 1.6 \text{ GHz}$ (Note 4)	V_{ID}	0.35	—	1.3	V	—
Differential input leakage current for IN0_p/n and IN1_p/n (includes current due to pull-up and pull-down resistors)	I_{IL}	–150	—	150	μA	$V_I = 2V$ or 0V
Single-ended input voltage for IN0_p and IN1_p	V_{SI}	–0.3	—	2.7	V	$V_{DD} = 3.3V$ or 2.5V
Single-ended input common mode voltage (IN0_p/n and IN1_p/n)	V_{SIC}	1	—	2	V	$V_{DD} = 3.3V$ or 2.5V
Single-ended input voltage swing for IN0_p and IN1_p	V_{SID}	0.3	—	1.3	V	$V_{DD} = 3.3V$ or 2.5V
Input frequency (differential)	f_{IN}	0	—	1600	MHz	—
Input frequency (LVCMOS)	f_{IN_CMOS}	0	—	250	MHz	—
Input duty cycle	dc	35%	—	65%	—	—
Input slew rate	Slew	—	2	—	V/ns	—
Input pull-up/ pull-down resistance	R_{PU}/R_{PD}	—	60	—	k Ω	—
Input pull-down resistance for INx_p	R_{PD}	—	30	—	k Ω	—
Input multiplexer isolation IN0_p/n to IN1_p/n and vice versa Power on both inputs 0 dBm, $f_{OFFSET} > 50$ kHz	I_{SO}	—	–84	—	dBc	$f_{IN} = 100$ MHz
		—	–82	—		$f_{IN} = 200$ MHz
		—	–71	—		$f_{IN} = 400$ MHz
		—	–67	—		$f_{IN} = 800$ MHz

- Note 1:** Values are over recommended operating conditions.
- Note 2:** Values are over all two power supply modes ($V_{DD} = 3.3V$ and $V_{DD} = 2.5V$).
- Note 3:** Input mux isolation is measured as amplitude of f_{OFFSET} spur in dBc on the output clock phase noise plot.
- Note 4:** Input differential voltage is calculated as $V_{ID} = V_{IH} - V_{IL}$ where V_{IH} and V_{IL} are input voltage high and low respectively. It should not be confused with $V_{ID} = 2 \times (V_{IH} - V_{IL})$ used in some data sheets. Please refer to Figure 4-1.

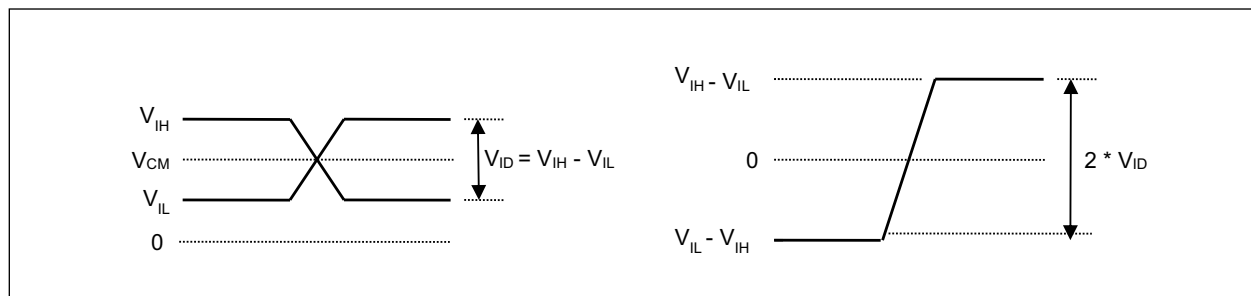


FIGURE 4-1: Differential Input Voltage Levels.

TABLE 4-5: CRYSTAL OSCILLATOR CHARACTERISTICS

Note 1, Note 2

Parameter	Symbol	Min.	Typ.	Max.	Units	Condition
Mode of oscillation	Mode	Fundamental			—	—
Frequency	f	8	—	160	MHz	—
On chip load capacitance	C _L	—	1	—	pF	—
On chip series resistor	R _S	—	0	—	Ω	—
On chip shunt resistor	R	—	500	—	kΩ	—
Frequency in overdrive mode Note 3	f _{OV}	0.1	—	250	MHz	Functional but may not meet AC parameters Minimum depends on AC coupling Capacitor (0.1 μF assumed)
Frequency in bypass mode Note 4	f _{BP}	0	—	250	MHz	Functional but may not meet AC parameters

Note 1: Values are over recommended operating conditions.

2: Values are over all two power supply modes (V_{DD} = 3.3V and V_{DD} = 2.5V).

3: Maximum input level is 2V.

4: Maximum output level is V_{DD}.

TABLE 4-6: POWER SUPPLY REJECTION RATIO FOR V_{DD} = V_{DDO} = 3.3V

Note 1, Note 2, Note 3

Parameter	Symbol	Min.	Typ.	Max.	Units	Condition
PSRR for LVPECL output	PSRR _{LVPECL}	—	-71.75	—	dBc	f _{IN} = 156.25 MHz
			-84.45			f _{IN} = 312.5 MHz
			-82.11			f _{IN} = 625 MHz
PSRR for LVDS output	PSRR _{LVDS}	—	-95.16	—	dBc	f _{IN} = 156.25 MHz
			-97.77			f _{IN} = 312.5 MHz
			-79.23			f _{IN} = 625 MHz
PSRR for HCSL output	PSRR _{HCSL}	—	-77.15	—	dBc	f _{IN} = 100 MHz
			-76.75			f _{IN} = 156.25 MHz
			-80.44			f _{IN} = 312.5 MHz

Note 1: Values are over recommended operating conditions.

2: Noise injected to VDDO power supply with frequency 100 kHz and amplitude 100 mVpp.

3: PSRR is measured as amplitude of 100 kHz spur in dBc on the output clock phase noise plot.

TABLE 4-7: POWER SUPPLY REJECTION RATIO FOR $V_{DD} = V_{DDO} = 2.5V$

Note 1, Note 2, Note 3

Parameter	Symbol	Min.	Typ.	Max.	Units	Condition
PSRR for LVPECL output	PSRR _{LVPECL}	—	–73.68	—	dBc	$f_{IN} = 156.25$ MHz
			–78.88			$f_{IN} = 312.5$ MHz
			–71.82			$f_{IN} = 625$ MHz
PSRR for LVDS output	PSRR _{LVDS}	—	–90.04	—	dBc	$f_{IN} = 156.25$ MHz
			–79.99			$f_{IN} = 312.5$ MHz
			–73.45			$f_{IN} = 625$ MHz
PSRR for HCSL output	PSRR _{HCSL}	—	–92.16	—	dBc	$f_{IN} = 100$ MHz
			–74.08			$f_{IN} = 156.25$ MHz
			–91.88			$f_{IN} = 312.5$ MHz

Note 1: Values are over recommended operating conditions.

Note 2: Noise injected to VDDO power supply with frequency 100 kHz and amplitude 100 mVpp.

Note 3: PSRR is measured as amplitude of 100 kHz spur in dBc on the output clock phase noise plot.

TABLE 4-8: LVCMOS OUTPUT CHARACTERISTICS FOR $V_{DDO} = 3.3V$

Note 1

Parameter	Symbol	Min.	Typ.	Max.	Units	Condition
Output high voltage (1 mA load)	V_{OH}	$V_{DDO} - 0.1$	—	—	V	DC measurement
Output low voltage (1 mA load)	V_{OL}	—	—	0.1	V	DC measurement
Output High Current (Load adjusted to $V_{OUT} = V_{DDO}/2$)	I_{OH}	—	30	—	mA	DC measurement
Output Low Current (Load adjusted to $V_{OUT} = V_{DDO}/2$)	I_{OL}	—	34	—	mA	DC measurement
Output impedance	R_O	—	15	—	Ω	DC measurement
Rise time (20% to 80%)	t_R	—	220	310	ps	—
Fall time (20% to 80%)	t_F	—	320	365	ps	—
Output frequency	f_O	0	—	250	MHz	—
Input to output delay	t_{IOD}	1.07	1.28	2.07	ns	—
Output enable time	t_{EN}	—	—	3	cycles	—
Output disable time	t_{DIS}	—	—	3	cycles	—
Additive RMS jitter in 1 MHz to 5 MHz band	$t_{j_1M_5M}$	—	46	80	fs	Input Clock 25 MHz
Additive RMS jitter in 12 kHz to 5 MHz band	$t_{j_12K_5M}$	—	56	90	fs	Input Clock 25 MHz
Additive RMS jitter in 1 MHz to 20 MHz band	$t_{j_1M_20M}$	—	60	79	fs	Input Clock 125 MHz
Additive RMS jitter in 12 kHz to 20 MHz band	$t_{j_12k_20M}$	—	65	86	fs	Input Clock 125 MHz
Additive RMS jitter in 1 MHz to 20 MHz band	$t_{j_1M_20M}$	—	61	94	fs	Input Clock 156.25 MHz
Additive RMS jitter in 12 kHz to 20 MHz band	$t_{j_12k_20M}$	—	66	100	fs	Input Clock 156.25 MHz

TABLE 4-8: LVCMOS OUTPUT CHARACTERISTICS FOR $V_{DDO} = 3.3V$

Noise Floor	N_F	—	−165	−162	dBc/Hz	Input clock: 25 MHz
		—	−160	−156		Input clock: 125 MHz
		—	−158	−153		Input clock: 156.25 MHz

Note 1: Values are over recommended operating conditions.

TABLE 4-9: LVCMOS OUTPUT CHARACTERISTICS FOR $V_{DDO} = 2.5V$

Note 1						
Parameter	Symbol	Min.	Typ.	Max.	Units	Condition
Output high voltage (1 mA load)	V_{OH}	$V_{DDO} - 0.1$	—	—	V	DC measurement
Output low voltage (1 mA load)	V_{OL}	—	—	0.1	V	DC measurement
Output High Current (Load adjusted to $V_{OUT} = V_{DDO}/2$)	I_{OH}	—	21	—	mA	DC measurement
Output Low Current (Load adjusted to $V_{OUT} = V_{DDO}/2$)	I_{OL}	—	25	—	mA	DC measurement
Output impedance	R_O	—	15	—	Ω	DC measurement
Rise time (20% to 80%)	t_R	—	225	310	ps	—
Fall time (20% to 80%)	t_F	—	320	365	ps	—
Output frequency	f_O	0	—	250	MHz	—
Input to output delay	t_{IOD}	1.10	1.41	2.30	ns	—
Output enable time	t_{EN}	—	—	3	cycles	—
Output disable time	t_{DIS}	—	—	3	cycles	—
Additive RMS jitter in 1 MHz to 5 MHz band	$t_{j_1M_5M}$	—	51	104	fs	Input Clock 25 MHz
Additive RMS jitter in 12 kHz to 5 MHz band	$t_{j_12K_5M}$	—	62	111	fs	Input Clock 25 MHz
Additive RMS jitter in 1 MHz to 20 MHz band	$t_{j_1M_20M}$	—	64	81	fs	Input Clock 125 MHz
Additive RMS jitter in 12 kHz to 20 MHz band	$t_{j_12k_20M}$	—	70	88	fs	Input Clock 125 MHz
Additive RMS jitter in 1 MHz to 20 MHz band	$t_{j_1M_20M}$	—	62	94	fs	Input Clock 156.25 MHz
Additive RMS jitter in 12 kHz to 20 MHz band	$t_{j_12k_20M}$	—	68	100	fs	Input Clock 156.25 MHz
Noise Floor	N_F	—	−164	−161	dBc/Hz	Input clock: 25 MHz
		—	−159	−155		Input clock: 125 MHz
		—	−158	−153		Input clock: 156.25 MHz

Note 1: Values are over recommended operating conditions.

TABLE 4-10: LVPECL OUTPUT CHARACTERISTICS FOR $V_{DDO} = 3.3V$

Note 1

Parameter	Symbol	Min.	Typ.	Max.	Units	Condition
Output high voltage	V_{LVPECL_OH}	1.9	2.08	2.4	V	DC Measurement
Output low voltage	V_{LVPECL_OL}	1.2	1.36	1.7	V	DC Measurement
Output differential swing (Note 2)	V_{LVPECL_SW}	0.6	0.72	0.9	V	DC Measurement
Variation of V_{LVPECL_SW} for complementary output states	ΔV_{LVPECL_SW}	0	0.02	0.07	V	—
Common mode output	V_{CM}	1.6	1.72	2.1	V	—
Output frequency when $V_{LVPECL_SW} \geq 0.6V$	$f_{MAX_0.6VSW}$	—	—	800	MHz	—
Output frequency when $V_{LVPECL_SW} \geq 0.4V$	$f_{MAX_0.4VSW}$	—	—	1600	MHz	—
Rise or fall time (20% to 80%)	t_R/t_F	—	110	170	ps	—
Output frequency	f_O	0	—	1600	MHz	—
Output to output skew	t_{OOSK}	—	—	40	ps	—
Device to device output skew	t_{DOOSK}	—	—	120	ps	—
Input to output delay	t_{IOD}	0.73	0.87	1.1	ns	—
Output enable time	t_{EN}	—	—	3	cycles	—
Output disable time	t_{DIS}	—	—	3	cycles	—
Additive RMS jitter in 1 MHz to 20 MHz band	$t_{j_1M_20M}$	—	68	96	fs	Input clock: 100 MHz
		—	50	64	fs	Input clock: 156.25 MHz
		—	20	32	fs	Input clock: 625 MHz
Additive RMS jitter in 12 kHz to 20 MHz band	$t_{j_12k_20M}$	—	71	101	fs	Input clock: 100 MHz
		—	55	70	fs	Input clock: 156.25 MHz
		—	25	39	fs	Input clock: 625 MHz
Noise floor	N_F	—	–161	–159	dBc/Hz	Input clock: 100 MHz
		—	–160	–155	dBc/Hz	Input clock: 156.25 MHz
		—	–155	–151	dBc/Hz	Input clock: 625 MHz

Note 1: Values are over recommended operating conditions.

Note 2: Output differential swing is calculated as $V_{SW} = V_{OH} - V_{OL}$. It should not be confused with $V_{SW} = 2 \times (V_{OH} - V_{OL})$ used in some data sheets. Please refer to [Figure 4-2](#).

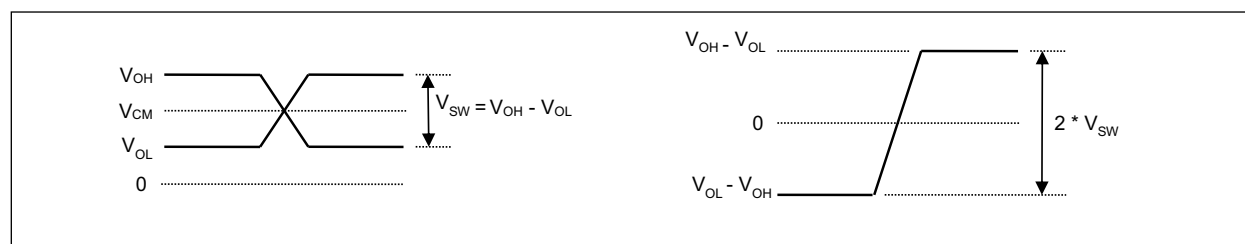


FIGURE 4-2: Differential Output Voltage Levels.

TABLE 4-11: LVPECL OUTPUT CHARACTERISTICS FOR $V_{DDO} = 2.5V$

Note 1						
Parameter	Symbol	Min.	Typ.	Max.	Units	Condition
Output high voltage	V_{LVPECL_OH}	1.1	1.28	1.7	V	DC Measurement
Output low voltage	V_{LVPECL_OL}	0.4	0.57	0.9	V	DC Measurement
Output differential swing (Note 2)	V_{LVPECL_SW}	0.6	0.71	0.9	V	DC Measurement
Variation of V_{LVPECL_SW} for complementary output states	ΔV_{LVPECL_SW}	0	0.02	0.05	V	—
Common mode output	V_{CM}	0.8	0.92	1.2	V	—
Output frequency when $V_{LVPECL_SW} \geq 0.6V$	$f_{MAX_0.6VSW}$	—	—	800	MHz	—
Output frequency when $V_{LVPECL_SW} \geq 0.4V$	$f_{MAX_0.4VSW}$	—	—	1600	MHz	—
Rise or fall time (20% to 80%)	$t_{R/F}$	—	120	170	ps	—
Output frequency	f_O	—	—	1600	MHz	—
Output to output skew	t_{OOSK}	—	—	40	ps	—
Device to device output skew	t_{DOOSK}	—	—	120	ps	—
Input to output delay	t_{IOD}	0.75	0.87	1.1	ns	—
Output enable time	t_{EN}	—	—	3	cycles	—
Output disable time	t_{DIS}	—	—	3	cycles	—
Additive RMS jitter in 1 MHz to 20 MHz band	$t_{j_1M_20M}$	—	65	91	fs	Input clock: 100 MHz
		—	50	64	fs	Input clock: 156.25 MHz
		—	20	30	fs	Input clock: 625 MHz
Additive RMS jitter in 12 kHz to 20 MHz band	$t_{j_12k_20M}$	—	69	99	fs	Input clock: 100 MHz
		—	54	75	fs	Input clock: 156.25 MHz
		—	26	41	fs	Input clock: 625 MHz
Noise floor	N_F	—	–161	–159	dBc/Hz	Input clock: 100 MHz
		—	–160	–156	dBc/Hz	Input clock: 156.25 MHz
		—	–155	–151	dBc/Hz	Input clock: 625 MHz

Note 1: Values are over recommended operating conditions.

2: Output differential swing is calculated as $V_{SW} = V_{OH} - V_{OL}$. It should not be confused with $V_{SW} = 2 \times (V_{OH} - V_{OL})$ used in some data sheets. Please refer to [Figure 4-2](#).

TABLE 4-12: LVDS OUTPUTS FOR $V_{DDO} = 3.3V$

Note 1

Parameter	Symbol	Min.	Typ.	Max.	Units	Condition
Output high voltage	V_{LVDS_OH}	1.3	1.39	1.47	V	DC Measurement
Output low voltage	V_{LVDS_OL}	1.0	1.07	1.15	V	DC Measurement
Output differential swing (Note 2)	V_{LVDS_SW}	0.25	0.32	0.39	V	DC Measurement
Variation of V_{LVDS_SW} for complementary output states	ΔV_{LVDS_SW}	0	0.002	0.01	V	—
Common mode output	V_{CM}	1.15	1.23	1.3	V	—
Variation of V_{CM} for complementary output states	ΔV_{CM}	0	0.001	0.01	V	—
Output frequency when $V_{LVDS_SW} \geq 250$ mV	$f_{MAX_0.25VSW}$	—	—	800	MHz	—
Output frequency when $V_{LVDS_SW} \geq 200$ mV	$f_{MAX_0.2VSW}$	—	—	1600	MHz	—
Rise or fall time (20% to 80%)	t_R/t_F	—	110	170	ps	—
Output frequency	f_O	0	—	1600	MHz	—
Output to output skew	t_{OOSK}	—	—	20	ps	—
Device to device output skew	t_{DOOSK}	—	—	130	ps	—
Input to output delay	t_{IOD}	0.76	0.86	1.1	ns	—
Output Short Circuit Current Single-Ended	I_S	–24	—	24	mA	Single-ended outputs shorted to GND
Output Short Circuit Current Differential	I_{SD}	–24	—	24	mA	Complementary outputs shorted
Output enable time	t_{EN}	—	—	3	cycles	—
Output disable time	t_{DIS}	—	—	3	cycles	—
Additive RMS jitter in 1 MHz to 20 MHz band	$t_{j_1M_20M}$	—	110	144	fs	Input clock: 100 MHz
		—	63	81	fs	Input clock: 156.25 MHz
		—	21	33	fs	Input clock: 625 MHz
Additive RMS jitter in 12 kHz to 20 MHz band	$t_{j_12k_20M}$	—	115	150	fs	Input clock: 100 MHz
		—	73	102	fs	Input clock: 156.25 MHz
		—	26	40	fs	Input clock: 625 MHz
Noise floor	N_F	—	–158	–156	fs	Input clock: 100 MHz
		—	–158	–155	fs	Input clock: 156.25 MHz
		—	–154	–151	fs	Input clock: 625 MHz

Note 1: Values are over recommended operating conditions.

Note 2: Output differential swing is calculated as $V_{SW} = V_{OH} - V_{OL}$. It should not be confused with $V_{SW} = 2 \times (V_{OH} - V_{OL})$ used in some data sheets. Please refer to [Figure 4-2](#).

TABLE 4-13: LVDS OUTPUTS FOR $V_{DDO} = 2.5V$

Note 1

Parameter	Symbol	Min.	Typ.	Max.	Units	Condition
Output high voltage	V_{LVDS_OH}	1.3	1.4	1.5	V	DC Measurement
Output low voltage	V_{LVDS_OL}	0.97	1.05	1.13	V	DC Measurement
Output differential swing (Note 2)	V_{LVDS_SW}	0.25	0.35	0.44	V	DC Measurement
Variation of V_{LVDS_SW} for complementary output states	ΔV_{LVDS_SW}	0	0.001	0.01	V	—

TABLE 4-13: LVDS OUTPUTS FOR $V_{DDO} = 2.5V$ (CONTINUED)

Common mode output	V_{CM}	1.15	1.23	1.3	V	—
Variation of V_{CM} for complementary output states	ΔV_{CM}	0	0.001	0.01	V	—
Output frequency when $V_{LVDS_SW} \geq 250$ mV	$f_{MAX_0.25VSW}$	—	—	800	MHz	—
Output frequency when $V_{LVDS_SW} \geq 200$ mV	$f_{MAX_0.2VSW}$	—	—	1600	MHz	—
Rise or fall time (20% to 80%)	t_R/t_F	—	110	170	ps	—
Output frequency	f_O	0	—	1600	MHz	—
Output to output skew	t_{OOSK}	—	—	20	ps	—
Device to device output skew	t_{DOOSK}	—	—	130	ps	—
Input to output delay	t_{IOD}	0.78	0.86	1.12	ns	—
Output Short Circuit Current Single-Ended	I_S	–24	—	24	mA	Single-ended outputs shorted to GND
Output Short Circuit Current Differential	I_{SD}	–24	—	24	mA	Complementary outputs shorted
Output enable time	t_{EN}	—	—	3	cycles	—
Output disable time	t_{DIS}	—	—	3	cycles	—
Additive RMS jitter in 1 MHz to 20 MHz band	$t_{j_1M_20M}$	—	107	140	fs	Input clock: 100 MHz
		—	62	77	fs	Input clock: 156.25 MHz
		—	20	31	fs	Input clock: 625 MHz
Additive RMS jitter in 12 kHz to 20 MHz band	$t_{j_12k_20M}$	—	111	146	fs	Input clock: 100 MHz
		—	66	83	fs	Input clock: 156.25 MHz
		—	24	36	fs	Input clock: 625 MHz
Noise floor	N_F	—	–158	–156	fs	Input clock: 100 MHz
		—	–159	–155	fs	Input clock: 156.25 MHz
		—	–155	–151	fs	Input clock: 625 MHz

Note 1: Values are over recommended operating conditions.

2: Output differential swing is calculated as $V_{SW} = V_{OH} - V_{OL}$. It should not be confused with $V_{SW} = 2 \times (V_{OH} - V_{OL})$ used in some data sheets. Please refer to [Figure 4-2](#).

TABLE 4-14: HCSL OUTPUTS FOR $V_{DDO} = 3.3V$

Note 1

Parameter	Symbol	Min.	Typ.	Max.	Units	Condition
Output high voltage	V_{HCSL_OH}	0.6	0.85	1.1	V	DC Measurement
Output low voltage	V_{HCSL_OL}	–0.05	0	0.05	V	DC Measurement
Output differential swing (Note 2)	V_{HCSL_SW}	0.6	0.85	1.1	V	DC Measurement
Variation of V_{HCSL_SW} for complementary output states	ΔV_{HCSL_SW}	0	0.003	0.05	V	—
Common mode output	V_{CM}	0.28	0.43	0.55	V	—
Variation of V_{CM} for complementary output states	ΔV_{CM}	0	0.002	0.05	V	—
Absolute Crossing Voltage	V_{CROSS}	0.320	0.384	0.447	V	—
Total Variation of V_{CROSS}	ΔV_{CROSS}	—	—	0.127	V	—
Output frequency	f_{MAX}	0	—	400	MHz	—
Rise or fall time (20% to 80%)	t_R/t_F	—	143	309	ps	—
Output to output skew	t_{OOSK}	—	—	21	ps	—

TABLE 4-14: HCSL OUTPUTS FOR $V_{DDO} = 3.3V$ (CONTINUED)

Device to device output skew	t_{DOOSK}	—	—	129	ps	—
Input to output delay	t_{IOD}	0.73	0.90	1.08	ns	—
Output enable time	t_{EN}	—	—	3	cycles	—
Output disable time	t_{DIS}	—	—	3	cycles	—
Additive Jitter as per PCIe 3.0 (PLL_BW = 2 MHz to 5 MHz, CDR = 10 MHz)	$t_{jPCIe_3.0}$	—	20	40	fs	Input clock: 100 MHz
Additive Jitter as per PCIe 4.0 (PLL_BW = 2 MHz to 5 MHz, CDR = 10 MHz)	$t_{jPCIe_4.0}$	—	20	40	fs	Input clock: 100 MHz
Additive Jitter as per PCIe 5.0 (PLL_BW = 0.5 MHz to 1.8 MHz, CDR for 32 GT/s CC)	$t_{jPCIe_5.0}$	—	13	19	fs	Input clock: 100 MHz
Additive RMS jitter in 1 MHz to 20 MHz band	$t_{j_1M_20M}$	—	73	104	fs	Input clock: 100 MHz
		—	53	69	fs	Input clock: 156.25 MHz
Additive RMS jitter in 12 kHz to 20 MHz band	$t_{j_12k_20M}$	—	77	112	fs	Input clock: 100 MHz
		—	64	100	fs	Input clock: 156.25 MHz
Noise floor	N_F	—	–161	–159	dBc/Hz	Input clock: 100 MHz
		—	–159	–155	dBc/Hz	Input clock: 156.25 MHz

Note 1: Values are over recommended operating conditions.

2: Output differential swing is calculated as $V_{SW} = V_{OH} - V_{OL}$. It should not be confused with $V_{SW} = 2 \times (V_{OH} - V_{OL})$ used in some data sheets. Please refer to [Figure 4-2](#).

TABLE 4-15: HCSL OUTPUTS FOR $V_{DDO} = 2.5V$

[Note 1](#)

Parameter	Symbol	Min.	Typ.	Max.	Units	Condition
Output high voltage	V_{HCSL_OH}	0.6	0.83	1.1	V	DC Measurement
Output low voltage	V_{HCSL_OL}	–0.05	0	0.05	V	DC Measurement
Output differential swing (Note 2)	V_{HCSL_SW}	0.5	0.83	1.1	V	DC Measurement
Variation of V_{HCSL_SW} for comple- mentary output states	ΔV_{HCSL_SW}	0	0.003	0.05	V	—
Common mode output	V_{CM}	0.28	0.42	0.55	V	—
Variation of V_{CM} for complementary output states	ΔV_{CM}	0	0.002	0.05	V	—
Absolute Crossing Voltage	V_{CROSS}	0.260	0.316	0.372	V	—
Total Variation of V_{CROSS}	ΔV_{CROSS}	—	—	0.108	V	—
Output frequency	f_{MAX}	0	—	400	MHz	—
Rise or fall time (20% to 80%)	t_R/t_F	—	125	162	ps	—
Output to output skew	t_{OOSK}	—	—	21	ps	—
Device to device output skew	t_{DOOSK}	—	—	129	ps	—
Input to output delay	t_{IOD}	0.76	0.92	1.10	ns	—
Output enable time	t_{EN}	—	—	3	cycles	—
Output disable time	t_{DIS}	—	—	3	cycles	—
Additive Jitter as per PCIe 3.0 (PLL_BW = 2 MHz to 5 MHz, CDR = 10 MHz)	$t_{jPCIe_3.0}$	—	20	40	fs	Input clock: 100 MHz

TABLE 4-15: HCSL OUTPUTS FOR $V_{DDO} = 2.5V$ (CONTINUED)

Additive Jitter as per PCIe 4.0 (PLL_BW = 2 MHz to 5 MHz, CDR = 10 MHz)	$t_{jPCle_4.0}$	—	20	40	fs	Input clock: 100 MHz
Additive Jitter as per PCIe 5.0 (PLL_BW = 0.5 MHz to 1.8 MHz, CDR for 32 GT/s CC)	$t_{jPCle_5.0}$	—	13	19	fs	Input clock: 100 MHz
Additive RMS jitter in 1 MHz to 20 MHz band	$t_{j_1M_20M}$	—	68	95	fs	Input clock: 100 MHz
		—	52	66	fs	Input clock: 156.25 MHz
Additive RMS jitter in 12 kHz to 20 MHz band	$t_{j_12k_20M}$	—	72	102	fs	Input clock: 100 MHz
		—	56	71	fs	Input clock: 156.25 MHz
Noise floor	N_F	—	-161	-158	dBc/Hz	Input clock: 100 MHz
		—	-160	-153	dBc/Hz	Input clock: 156.25 MHz

Note 1: Values are over recommended operating conditions.

2: Output differential swing is calculated as $V_{SW} = V_{OH} - V_{OL}$. It should not be confused with $V_{SW} = 2 \times (V_{OH} - V_{OL})$ used in some data sheets. Please refer to [Figure 4-2](#).

TABLE 4-16: LVCMOS OUTPUT PHASE NOISE WITH 25 MHZ XTAL

[Note 1](#)

Parameter	Symbol	Min.	Typ.	Max.	Units	Condition
Jitter RMS in 12 kHz to 5 MHz band	$t_{j_12k_5M}$	—	103	—	fs	$V_{DD} = 3.3V, V_{DDO} = 3.3V$
		—	117	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$
Noise floor	N_F	—	-75	—	dBc/Hz	$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @10 Hz
		—	-107	—		$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @100 Hz
		—	-132	—		$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @1 kHz
		—	-150	—		$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @10 kHz
		—	-162	—		$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @100 kHz
		—	-166	—		$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @1 MHz
		—	-166	—		$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @5 MHz
		—	-70	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @10 Hz
		—	-102	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @100 Hz
		—	-130	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @1 kHz
		—	-149	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @10 kHz
		—	-161	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @100 kHz
		—	-165	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @1 MHz
		—	-165	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @5 MHz

Note 1: Values are over recommended operating conditions.

TABLE 4-17: LVPECL OUTPUT PHASE NOISE WITH 25 MHz XTAL

Note 1

Parameter	Symbol	Min.	Typ.	Max.	Units	Condition
Jitter RMS in 12 kHz to 5 MHz band	$t_{J_12k_5M}$	—	265	—	fs	$V_{DD} = 3.3V, V_{DDO} = 3.3V$
		—	213	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$
Noise floor	N_F	—	–75	—	dBc/Hz	$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @10 Hz
		—	–107	—		$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @100 Hz
		—	–133	—		$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @1 kHz
		—	–152	—		$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @10 kHz
		—	–157	—		$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @100 kHz
		—	–158	—		$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @1 MHz
		—	–157	—		$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @5 MHz
		—	–71	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @10 Hz
		—	–103	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @100 Hz
		—	–130	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @1 kHz
		—	–151	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @10 kHz
		—	–158	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @100 kHz
		—	–160	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @1 MHz
		—	–159	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @5 MHz

Note 1: Values are over recommended operating conditions.

TABLE 4-18: LVDS OUTPUT PHASE NOISE WITH 25 MHz XTAL

Note 1

Parameter	Symbol	Min.	Typ.	Max.	Units	Condition
Jitter RMS in 12 kHz to 5 MHz band	$t_{J_12k_5M}$	—	178	—	fs	$V_{DD} = 3.3V, V_{DDO} = 3.3V$
		—	190	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$
Noise floor	N_F	—	–75	—	dBc/Hz	$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @10 Hz
		—	–107	—		$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @100 Hz
		—	–133	—		$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @1 kHz
		—	–154	—		$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @10 kHz
		—	–161	—		$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @100 kHz
		—	–161	—		$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @1 MHz
		—	–160	—		$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @5 MHz
		—	–68	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @10 Hz
		—	–103	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @100 Hz
		—	–130	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @1 kHz
		—	–152	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @10 kHz
		—	–161	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @100 kHz
		—	–160	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @1 MHz
		—	–159	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @5 MHz

Note 1: Values are over recommended operating conditions.

TABLE 4-19: HCSSL OUTPUT PHASE NOISE WITH 25 MHZ XTAL

Note 1

Parameter	Symbol	Min.	Typ.	Max.	Units	Condition
Jitter RMS in 12 kHz to 5 MHz band	$t_{J_12k_5M}$	—	269	—	fs	$V_{DD} = 3.3V, V_{DDO} = 3.3V$
		—	228	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$
Noise floor	N_F	—	−76	—	dBc/Hz	$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @10 Hz
		—	−107	—		$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @100 Hz
		—	−133	—		$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @1 kHz
		—	−152	—		$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @10 kHz
		—	−157	—		$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @100 kHz
		—	−157	—		$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @1 MHz
		—	−157	—		$V_{DD} = 3.3V, V_{DDO} = 3.3V$ @5 MHz
		—	−73	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @10 Hz
		—	−105	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @100 Hz
		—	−131	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @1 kHz
		—	−151	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @10 kHz
		—	−158	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @100 kHz
		—	−159	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @1 MHz
		—	−159	—		$V_{DD} = 2.5V, V_{DDO} = 2.5V$ @5 MHz

Note 1: Values are over recommended operating conditions.

THERMAL SPECIFICATIONS

Parameter	Symbol	Condition	Value	Units
Maximum Ambient Temperature	T_A	—	85	°C
Maximum Junction Temperature	$T_{J(MAX)}$	—	125	°C
Package Thermal Resistance, 5x5 VQFN 32-Lead				
Junction to Ambient Thermal Resistance Note 1	θ_{JA}	Still air	23.5	°C/W
		1m/s airflow	18.9	°C/W
		2.5 m/s airflow	17.1	°C/W
Junction to Board Thermal Resistance	θ_{JB}	—	7.9	°C/W
Junction to Case Thermal Resistance	θ_{JC}	—	16.5	°C/W
Junction to Pad Thermal Resistance Note 2	θ_{JP}	Still air	3.9	°C/W
Junction to Top-Center Thermal Characterization Parameter	Ψ_{JT}	Still air	0.2	°C/W


Note 1: Theta-JA (θ_{JA}) is the thermal resistance from junction to ambient when the package is mounted on a 4-layer JEDEC standard test board and dissipating maximum power.

2: Theta-JP (θ_{JP}) is the thermal resistance from junction to the center exposed pad on the bottom of the package).

NOTES:

5.0 PACKAGE OUTLINE

5.1 Package Marking Information

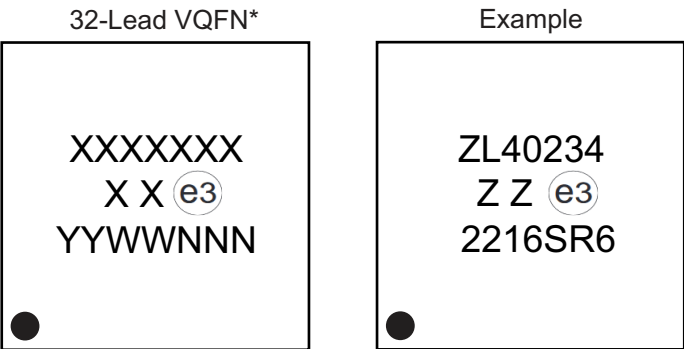

Legend: XX...X Product code or customer-specific information
Y Year code (last digit of calendar year)
YY Year code (last 2 digits of calendar year)
WW Week code (week of January 1 is week '01')
NNN Alphanumeric traceability code
(e3) Pb-free JEDEC® designator for Matte Tin (Sn)
* This package is Pb-free. The Pb-free JEDEC designator ((e3)) can be found on the outer packaging for this package.


●, ▲, ▼ Pin one index is identified by a dot, delta up, or delta down (triangle mark).

Note: In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information. Package may or may not include the corporate logo.

Underbar (_) and/or Overbar (¯) symbol may not be to scale.


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packages>

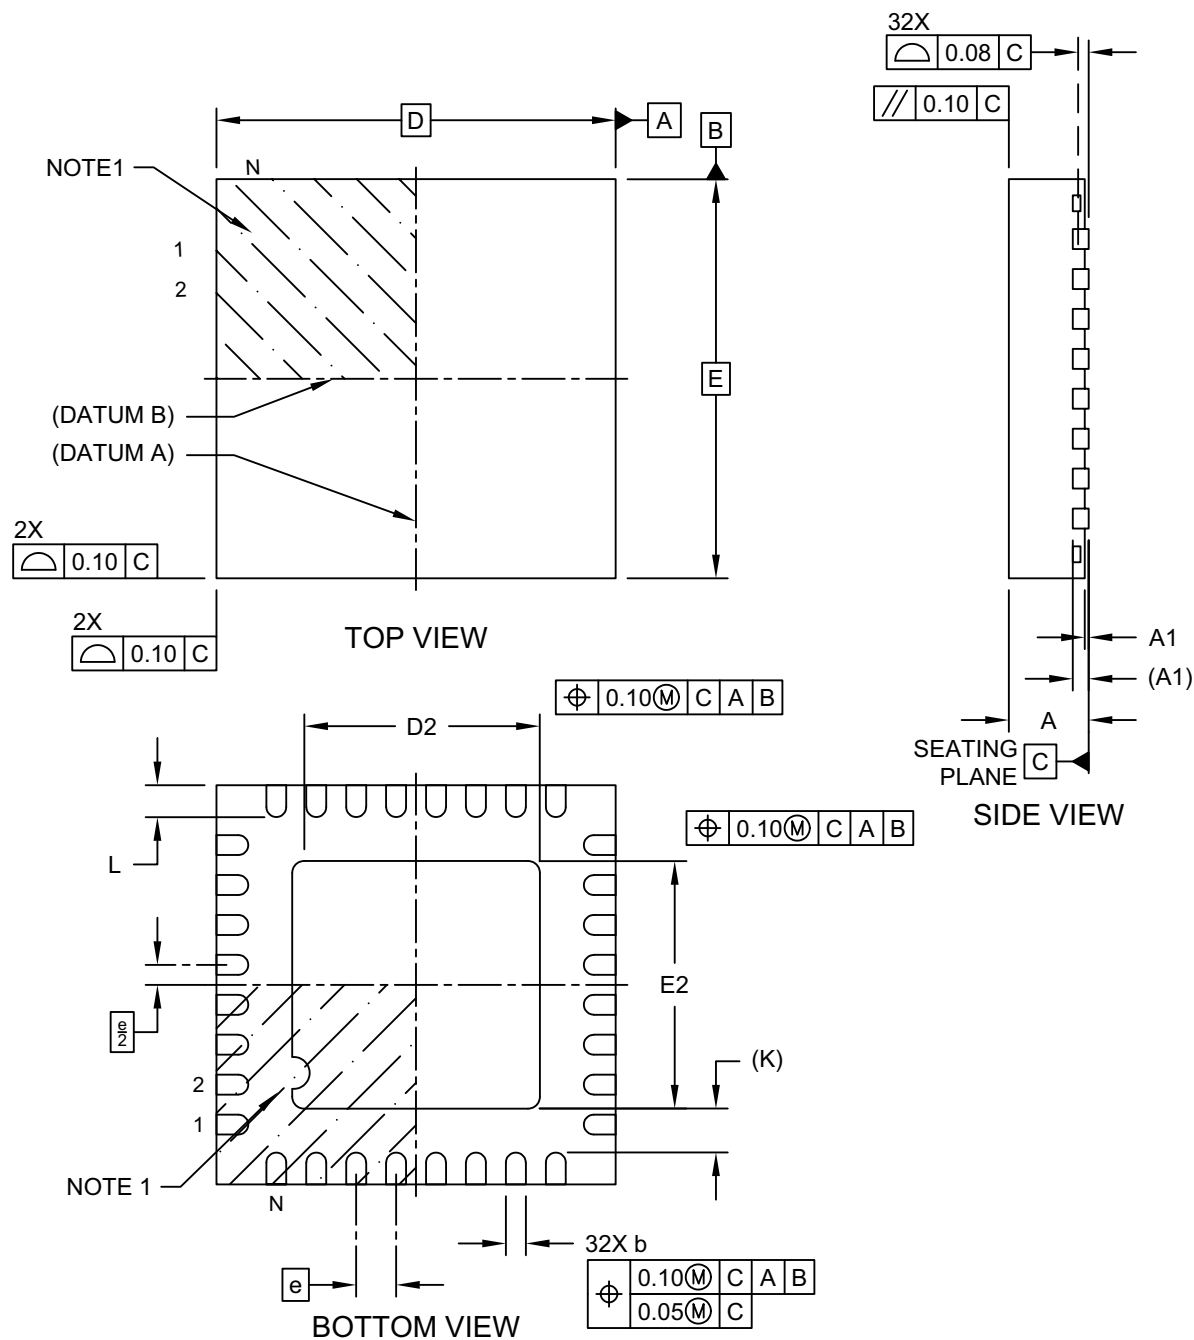

32-Lead Very Thin Plastic Quad Flat, No Lead Package (M3C) - 5x5x1 mm Body [VQFN] With 3.10 mm Exposed Pad; Microsemi Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

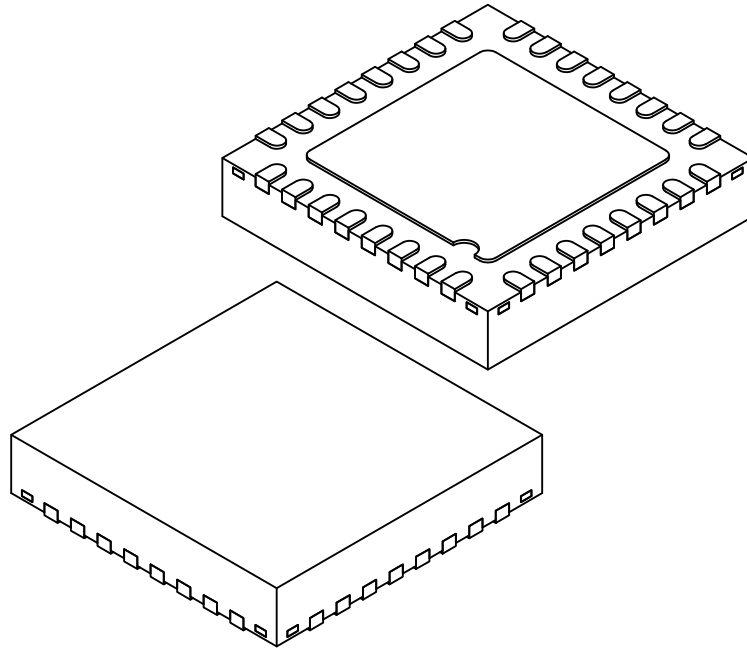

		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		32		
Pitch	e		0.50 BSC		
Overall Height	A		0.80	0.90	1.00
Standoff	A1		0.00	0.02	0.05
Terminal Thickness	A3		0.20 REF		
Overall Length	D		5.00 BSC		
Exposed Pad Length	D2		3.00	3.10	3.20
Overall Width	E		5.00 BSC		
Exposed Pad Width	E2		3.00	3.10	3.20
Terminal Width	b		0.20	0.25	0.30
Terminal Length	L		0.35	0.40	0.45
Terminal-to-Exposed-Pad	K		0.20	—	—


Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-25400 Rev A Sheet 2 of 2

32-Lead Very Thin Plastic Quad Flat, No Lead Package (M3C) - 5x5x1 mm Body [VQFN] With 3.10 mm Exposed Pad; Microsemi Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

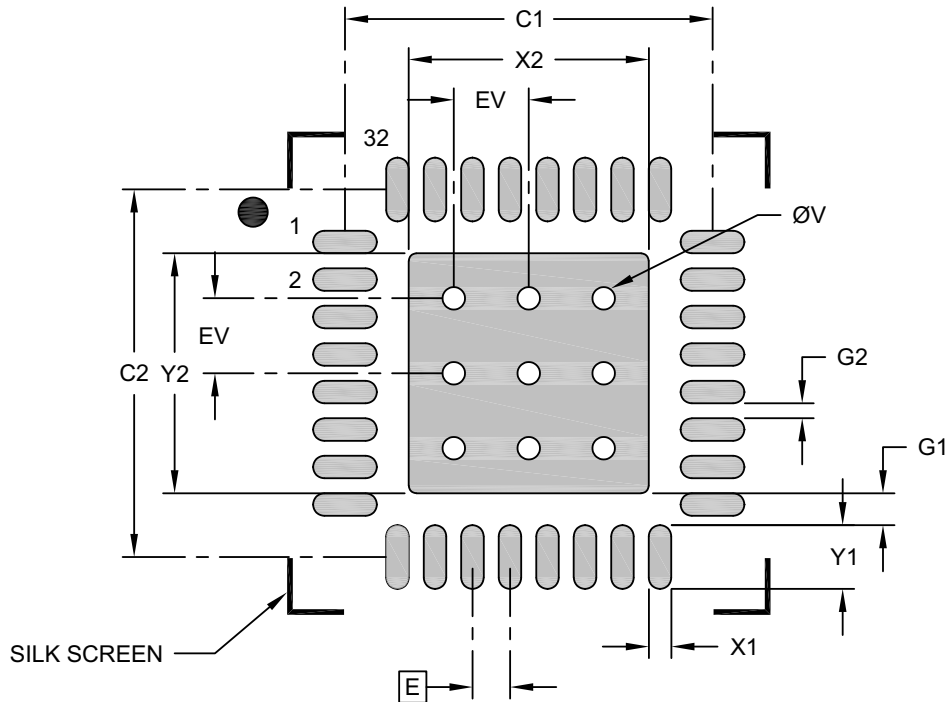

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Optional Center Pad Width	X2			3.20
Optional Center Pad Length	Y2			3.20
Contact Pad Spacing	C1		4.90	
Contact Pad Spacing	C2		4.90	
Contact Pad Width (X32)	X1			0.30
Contact Pad Length (X32)	Y1			0.85
Contact Pad to Center Pad (X32)	G1	0.23		
Contact Pad to Contact Pad (X28)	G2	0.20		
Thermal Via Diameter	V		0.30	
Thermal Via Pitch	EV		1.00	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-27400 Rev A

NOTES:

APPENDIX A: DATA SHEET REVISION HISTORY

TABLE A-1: REVISION HISTORY

Revision	Section/Figure/Entry	Correction
DS20006824A (10-16-23)	—	Converted Microsemi data sheet ZL40234 to Microchip DS20006824A. Minor text changes throughout.

PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

<u>PART NO.</u>	X	X	X	X
Device	Chip Carrier Type	Package	Media Type	Finish
Device: ZL40234: Low Skew, Low Additive Jitter 4 Output LVPECL/LVDS/HCSL Fanout Buffer with One LVCMOS Output Chip Carrier Type: L = Leadless Chip Carrier Package: D = 32-Lead VQFN Package Media Type: G = 490/Tray F = 4,000/Reel Finish: 1 = Pb Free with Matte Sn Lead Finish Equating to RoHS e3				
Examples: a) ZL40234LDG1: ZL40234, Leadless Chip Carrier, 32-Lead VQFN Package, 490/Tray, Pb Free with Matte Sn Lead Finish Equating to RoHS e3 b) ZL40234LDF1: ZL40234, Leadless Chip Carrier, 32-Lead VQFN Package, 4,000/Reel, Pb Free with Matte Sn Lead Finish Equating to RoHS e3				
Note 1: Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option.				

NOTES:

Note the following details of the code protection feature on Microchip products:

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
 - Microchip believes that its family of products is secure when used in the intended manner, within operating specifications, and under normal conditions.
 - Microchip values and aggressively protects its intellectual property rights. Attempts to breach the code protection features of Microchip product is strictly prohibited and may violate the Digital Millennium Copyright Act.
 - Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is "unbreakable" Code protection is constantly evolving. Microchip is committed to continuously improving the code protection features of our products.
-

This publication and the information herein may be used only with Microchip products, including to design, test, and integrate Microchip products with your application. Use of this information in any other manner violates these terms. Information regarding device applications is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. Contact your local Microchip sales office for additional support or, obtain additional support at <https://www.microchip.com/en-us/support/design-help/client-support-services>.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL LOSS, DAMAGE, COST, OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION.

Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, CryptoMemory, CryptoRF, dsPIC, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Klear, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricon, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, ClockWorks, The Embedded Control Solutions Company, EtherSynch, Flashtec, Hyper Speed Control, HyperLight Load, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, TimeCesium, TimeHub, TimePictra, TimeProvider, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, Clockstudio, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, EyeOpen, GridTime, IdealBridge, IGaT, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Paralleling, IntelliMOS, Inter-Chip Connectivity, JitterBlocker, Knob-on-Display, MarginLink, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, mSiC, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, Power MOS IV, Power MOS 7, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SmartHLS, SMART-I.S., storClad, SQL, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, Trusted Time, TSHARC, Turing, USBCheck, VariSense, VectorBlox, VeriPHY, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2023, Microchip Technology Incorporated and its subsidiaries.

All Rights Reserved.

ISBN: 978-1-6683-3278-8

For information regarding Microchip's Quality Management Systems, please visit www.microchip.com/quality.

Worldwide Sales and Service

AMERICAS

Corporate Office
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
<http://www.microchip.com/support>
Web Address:
www.microchip.com

Atlanta
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

Austin, TX
Tel: 512-257-3370

Boston
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Dallas
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit
Novi, MI
Tel: 248-848-4000

Houston, TX
Tel: 281-894-5983

Indianapolis
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453
Tel: 317-536-2380

Los Angeles
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608
Tel: 951-273-7800

Raleigh, NC
Tel: 919-844-7510

New York, NY
Tel: 631-435-6000

San Jose, CA
Tel: 408-735-9110
Tel: 408-436-4270

Canada - Toronto
Tel: 905-695-1980
Fax: 905-695-2078

ASIA/PACIFIC

Australia - Sydney
Tel: 61-2-9868-6733

China - Beijing
Tel: 86-10-8569-7000

China - Chengdu
Tel: 86-28-8665-5511

China - Chongqing
Tel: 86-23-8980-9588

China - Dongguan
Tel: 86-769-8702-9880

China - Guangzhou
Tel: 86-20-8755-8029

China - Hangzhou
Tel: 86-571-8792-8115

China - Hong Kong SAR
Tel: 852-2943-5100

China - Nanjing
Tel: 86-25-8473-2460

China - Qingdao
Tel: 86-532-8502-7355

China - Shanghai
Tel: 86-21-3326-8000

China - Shenyang
Tel: 86-24-2334-2829

China - Shenzhen
Tel: 86-755-8864-2200

China - Suzhou
Tel: 86-186-6233-1526

China - Wuhan
Tel: 86-27-5980-5300

China - Xian
Tel: 86-29-8833-7252

China - Xiamen
Tel: 86-592-2388138

China - Zhuhai
Tel: 86-756-3210040

ASIA/PACIFIC

India - Bangalore
Tel: 91-80-3090-4444

India - New Delhi
Tel: 91-11-4160-8631

India - Pune
Tel: 91-20-4121-0141

Japan - Osaka
Tel: 81-6-6152-7160

Japan - Tokyo
Tel: 81-3-6880-3770

Korea - Daegu
Tel: 82-53-744-4301

Korea - Seoul
Tel: 82-2-554-7200

Malaysia - Kuala Lumpur
Tel: 60-3-7651-7906

Malaysia - Penang
Tel: 60-4-227-8870

Philippines - Manila
Tel: 63-2-634-9065

Singapore
Tel: 65-6334-8870

Taiwan - Hsin Chu
Tel: 886-3-577-8366

Taiwan - Kaohsiung
Tel: 886-7-213-7830

Taiwan - Taipei
Tel: 886-2-2508-8600

Thailand - Bangkok
Tel: 66-2-694-1351

Vietnam - Ho Chi Minh
Tel: 84-28-5448-2100

EUROPE

Austria - Wels
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

Denmark - Copenhagen
Tel: 45-4485-5910
Fax: 45-4485-2829

Finland - Espoo
Tel: 358-9-4520-820

France - Paris
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

Germany - Garching
Tel: 49-8931-9700

Germany - Haan
Tel: 49-2129-3766400

Germany - Heilbronn
Tel: 49-7131-72400

Germany - Karlsruhe
Tel: 49-721-625370

Germany - Munich
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Germany - Rosenheim
Tel: 49-8031-354-560

Israel - Ra'anana
Tel: 972-9-744-7705

Italy - Milan
Tel: 39-0331-742611
Fax: 39-0331-466781

Italy - Padova
Tel: 39-049-7625286

Netherlands - Drunen
Tel: 31-416-690399
Fax: 31-416-690340

Norway - Trondheim
Tel: 47-7288-4388

Poland - Warsaw
Tel: 48-22-3325737

Romania - Bucharest
Tel: 40-21-407-87-50

Spain - Madrid
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

Sweden - Gothenberg
Tel: 46-31-704-60-40

Sweden - Stockholm
Tel: 46-8-5090-4654

UK - Wokingham
Tel: 44-118-921-5800
Fax: 44-118-921-5820