

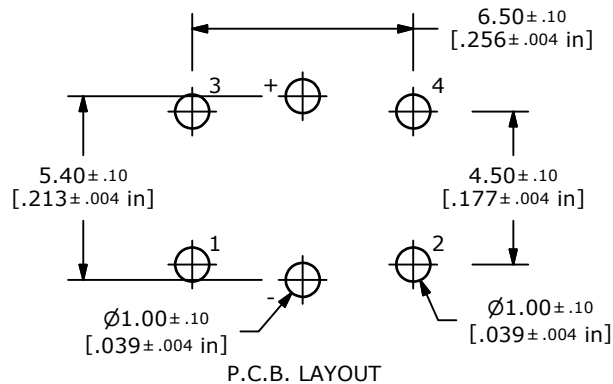
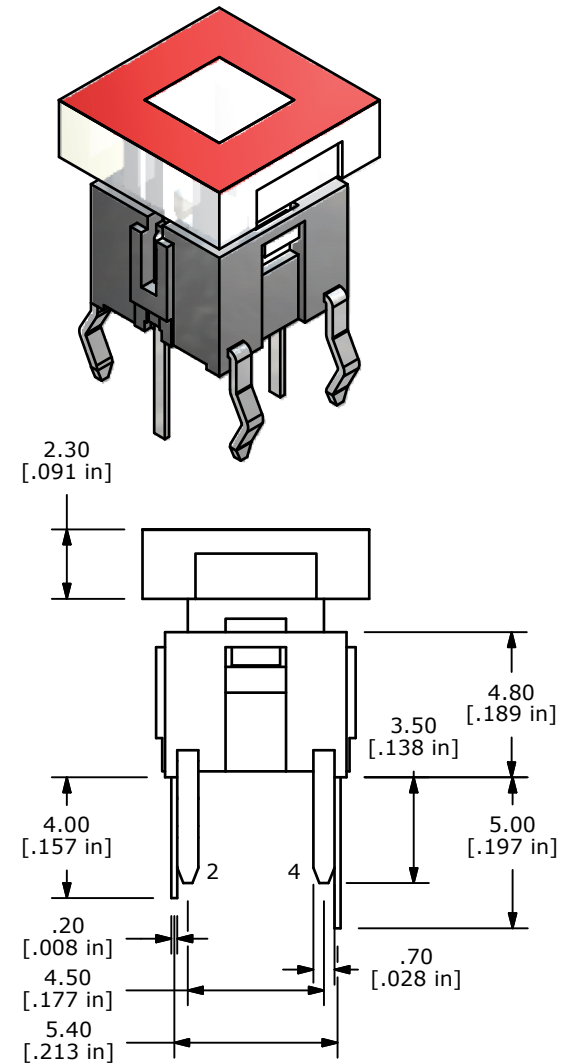


- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. RATING: 50mA @ 12VDC
 4. TRAVEL: 0.25 +0.2/0.1mm
 - ▲5. OPERATING FORCE: 160±50gf
 6. CONTACT RESISTANCE: 100 Milli-Ohms Max
 7. 2002/95/EC (ROHS) COMPLIANT
 - ▲8. SHORTER LEAD WITH COLOR IS NEGATIVE (CATHODE).
 9. ▲ DENOTES CRITICAL PARAMETER

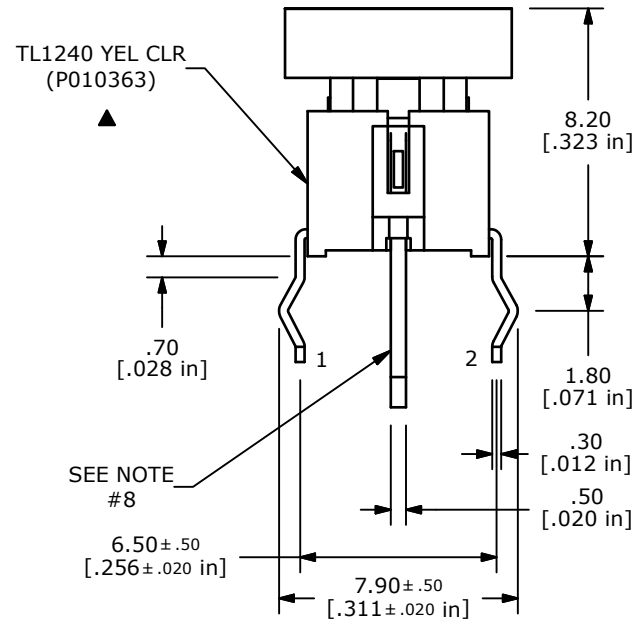

LED SPECS	UNITS	YELLOW
FORWARD CURRENT	mA	20
FORWARD VOLTAGE	V	2.1-2.6
LUMINOUS INTENSITY	MCD	45

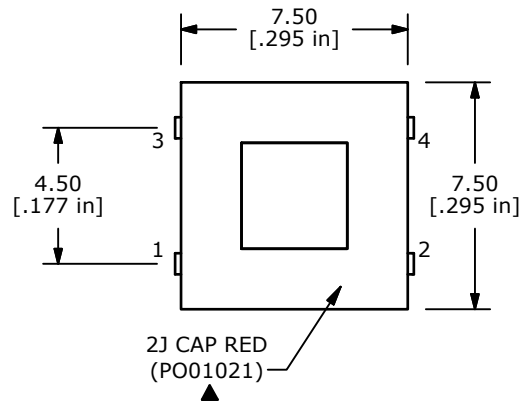

TITLE TL1240YQ2JRED

C	19550	DRAWING UPDATE / CLEAN-UP	12/28/10	BGL
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	4:1	DATE	12/28/2010	DR	BGL	DWG	XP0194P	REV	C
-------	-----	------	------------	----	-----	-----	---------	-----	---