




DIMENSIONS(mm)			
SIZE	A±0.38	B±0.25	C±0.25
14	44.00	25.50	36.00
24	54.70	36.20	46.70
36	67.70	49.00	59.70
50	82.70	64.50	74.70

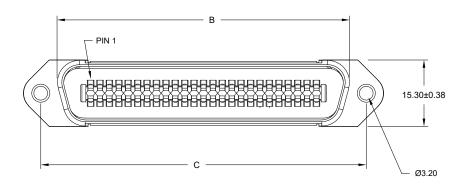

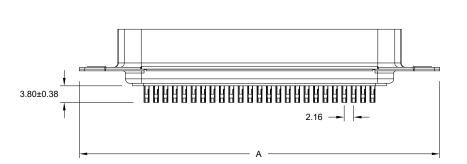



SPECIFICATIONS:

ELECTRICAL:

CURRENT RATING: 1 AMPS

INSULATION RESISTANCE: 1,000 MΩ MIN. @ 500 VDC DIELECTRIC WITHSTANDING VOLTAGE: 1,000 VAC FOR 1 MINUTE


CONTACT RESISTANCE: 30 m Ω MAX. OPERATING TEMPERATURE: -55°C TO +105°C

MATERIALS:

INSULATION: PBT, UL94 V-0 RATED CONTACTS: PHOSPHOR BRONZE

CONTACT PLATING: GOLD FLASH IN MATING AREA

BRIGHT TIN IN SOLDER AREA SHELL: STEEL, NICKEL PLATED



WILL ACCEPT 26-20 AWG WIRE

NTS

ROHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

WAYNE ROBBINS

DATE: 01/16/2019

NorComp

UNITS = mm

DO NOT SCALE FROM DRAWING

| SCALE: | SHEET OF | REV

1

2

16

DWG NO. 111-YYY-103L001

