




NOTES

1. 梱包数量： 3000個 / リール
NUMBER OF CONNECTORS : 3000 PCS/REEL.
2. リードテープ長さ
LEAD TAPE LENGTH
3. カバーテープの剥離強度については、IEC60286-3に準拠。
COVER TAPE PEEL FORCE IS DEFINED BY IEC 60286-3.
4. 製品詳細寸法については、図面 5052781004/1005を参照下さい。
FOR DIMENTIONS OF PRODUCT, REFER TO 5052781004/1005.
5. 材料 MATERIAL
キャリアテープ : ポリスチレン
CARRIER TAPE : POLYSTYRENE
トップテープ : ポリエチレンテレフタレート、ポリエチレン
TOP TAPE : POLYETHYLENE TEREHTHALATE, POLYETHYLENE
リール :ポリスチレン<リサイクル材を含む>
REEL : POLYSTYRENE <RECYCLE MATERIAL CONTAINED >
6. ELV及びRoHS適合品 ELV AND RoHS COMPLIANT.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE	CURRENT REV DESC:				molex		
mm		2:1							
GENERAL TOLERANCES (UNLESS SPECIFIED)			EC NO: 787265 DRWN: RAJMOK 2024/03/13 CHK'D: HSHIMOYAMA 2024/05/28 APPR: YNAITO 2024/05/29 INITIAL REVISION: DRWN: RAJMOK 2024/02/20 APPR: YNAITO 2024/02/26				0.5 FFC CONN ZIF E/O EMBOSSED TAPE PKG		
ANGULAR TOL	±	1.0 °					PRODUCT CUSTOMER DRAWING		
4 PLACES	±	0.03					DOCUMENT NUMBER		
3 PLACES	±	0.03					5052780001		
2 PLACES	±	0.05					DOC TYPE	DOC PART	REVISION
1 PLACE	±	0.1					PSD	000	B
0 PLACES	±	0.2							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER		SHEET NUMBER
				A3-SIZE	505278	SEE TABLE	GENERAL		1 OF 2

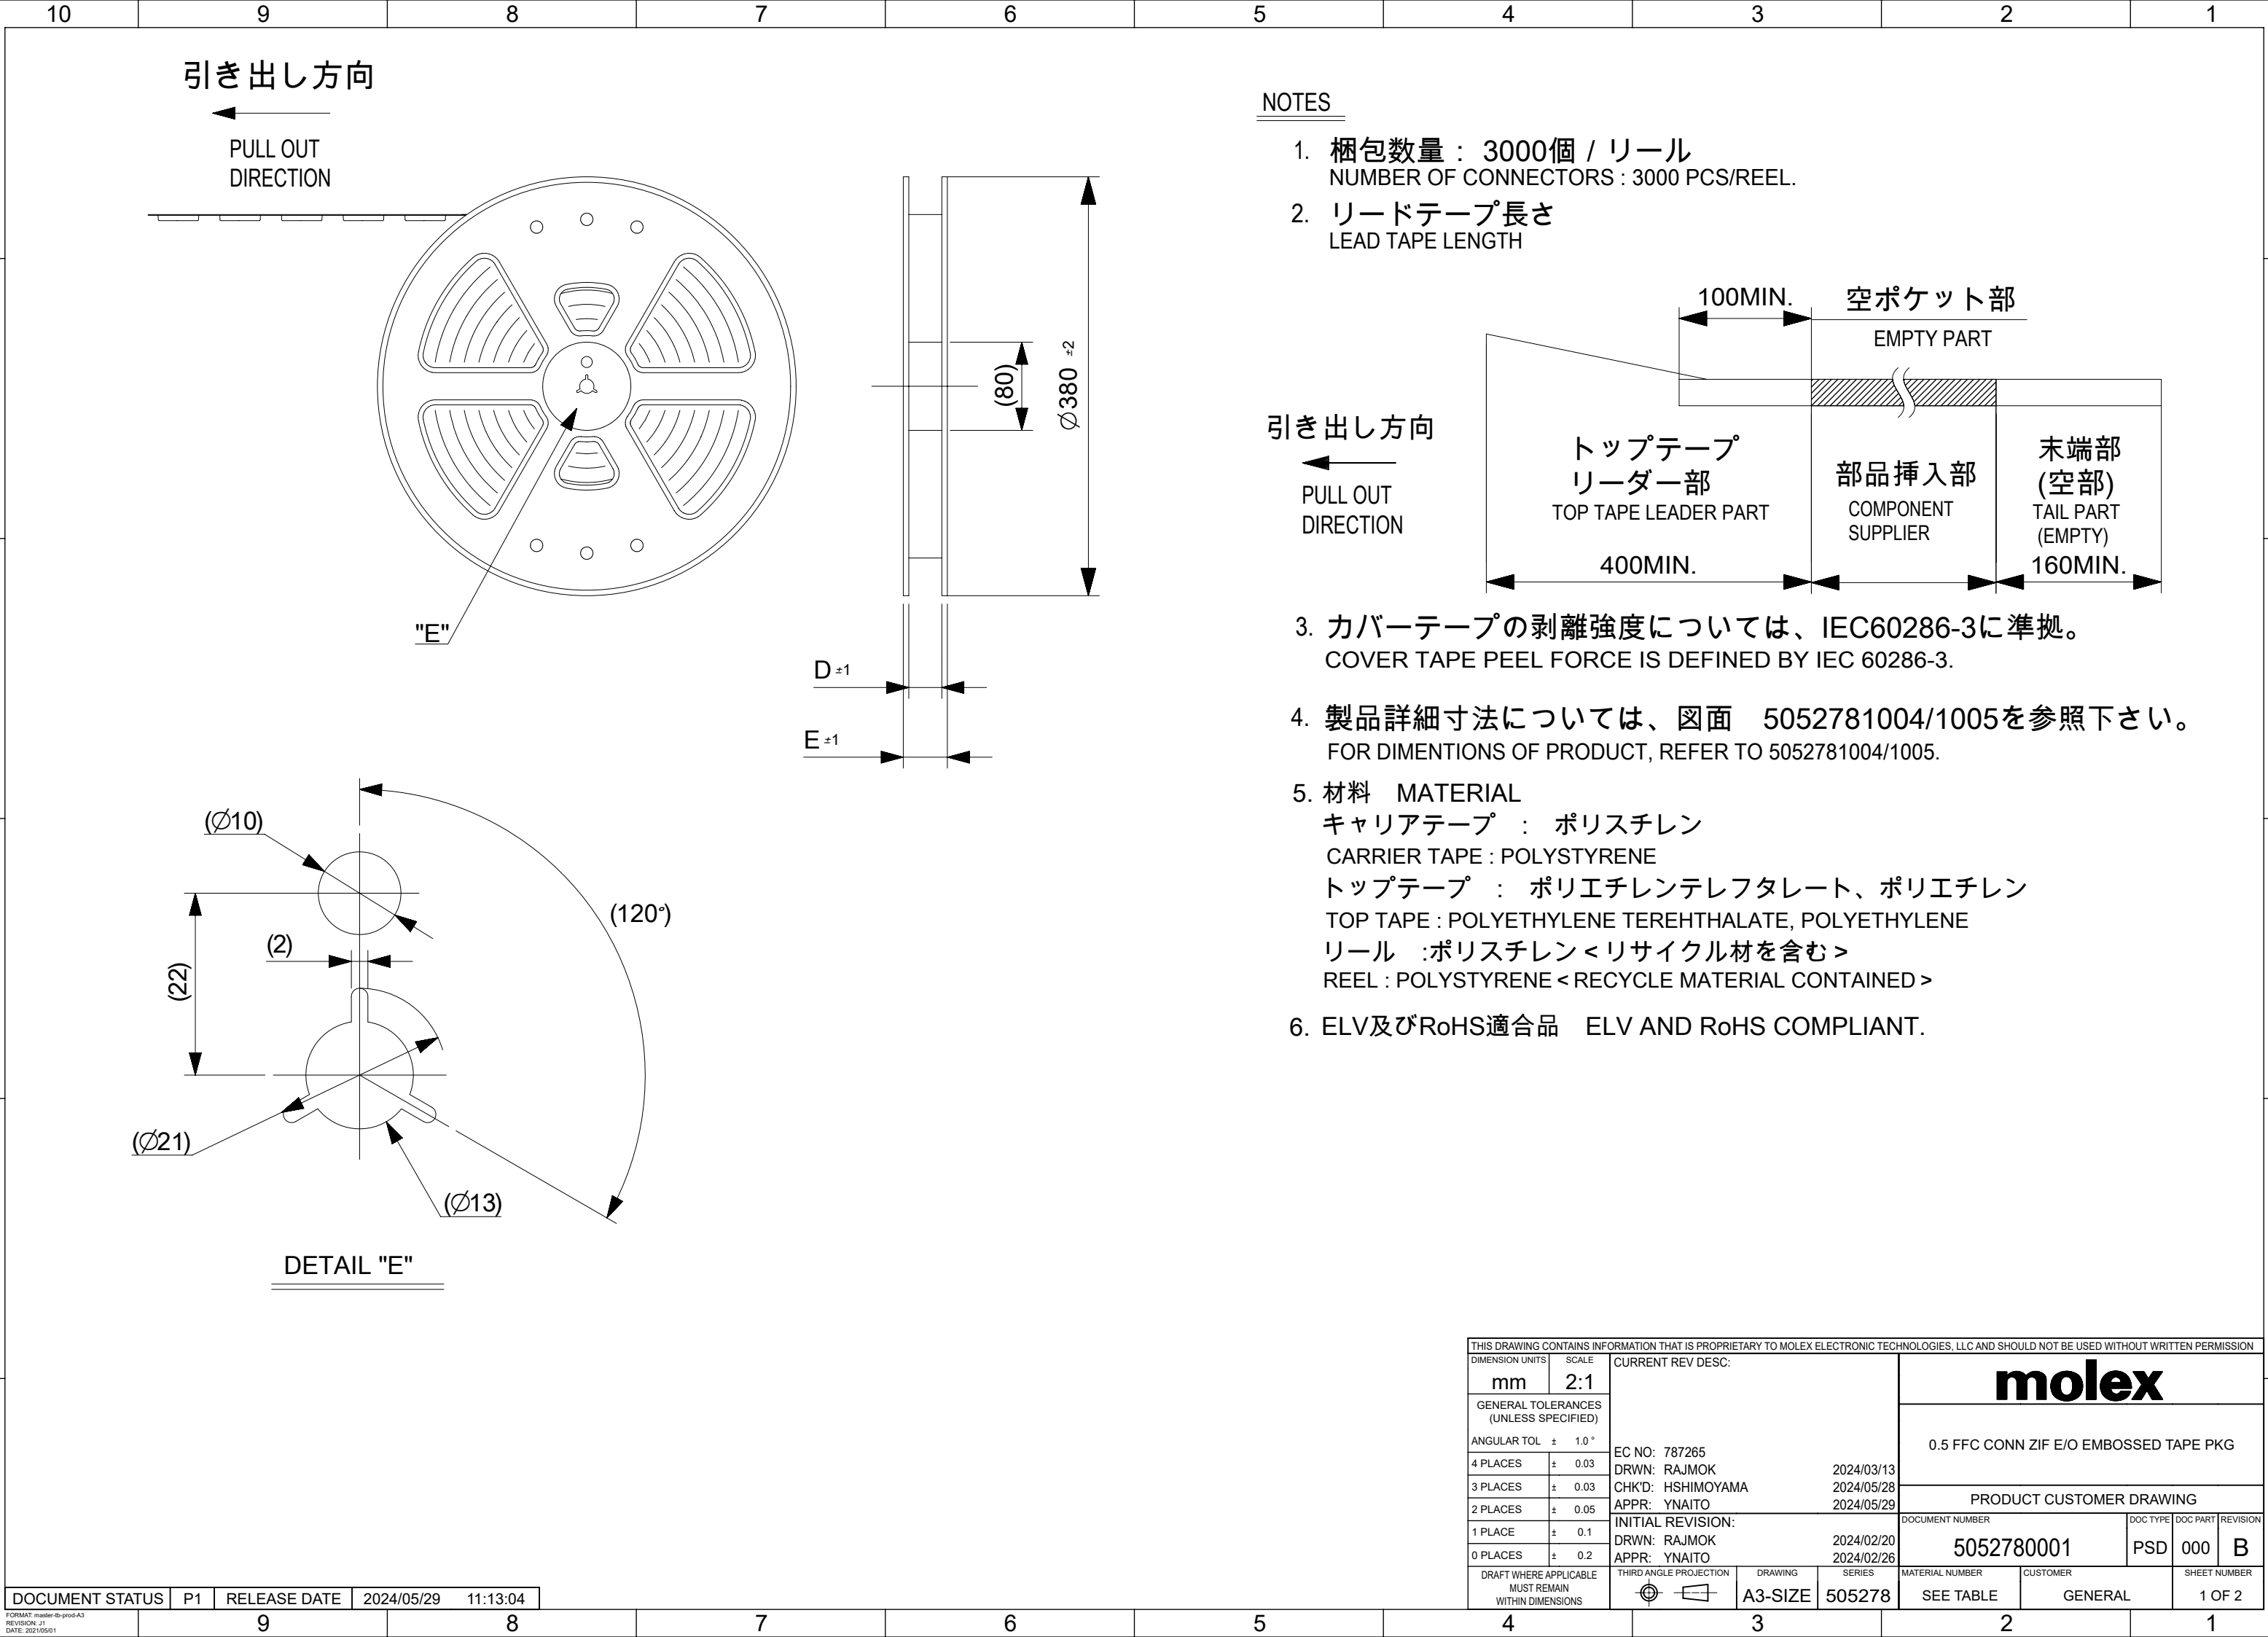