

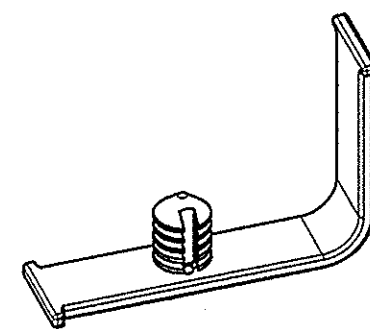
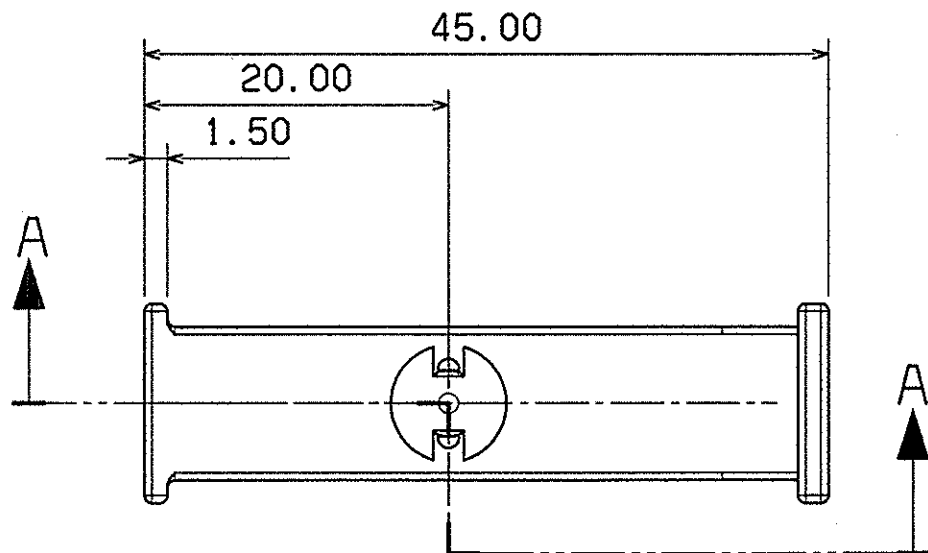
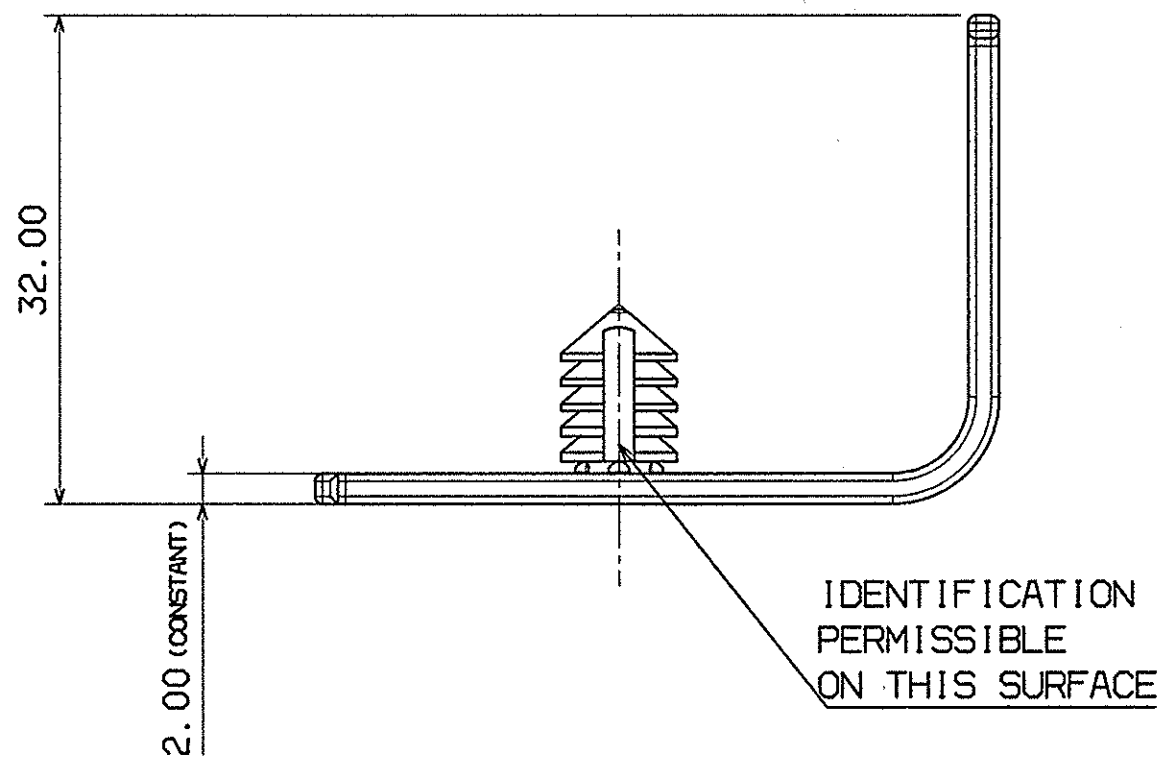


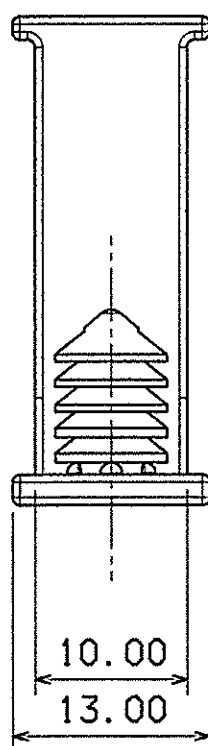


ACTUAL SIZE
(1/1)

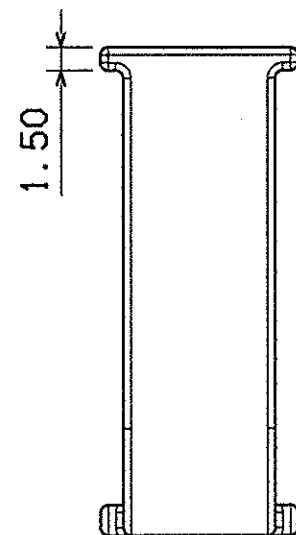


NOTES:

- 1. MUST BE FREE OF IMPERFECTIONS THAT AFFECT FUNCTION. PROPER FUNCTIONALITY TO BE DETERMINED BY THE APPROPRIATE YAZAKI ENGINEERING AFFILIATE.
- 2. MATERIAL: ACETAL.
- 3. UNLESS OTHERWISE SPECIFIED, FOR TEST REQUIREMENTS, REFER TO DVPR-99-A060. YAZAKI NORTH AMERICA-CANTON IS RESPONSIBLE FOR TESTING.
- 4. MATING HOLE: $\varnothing$ 6.5mm, $t=0.56\sim 5.10$ mm

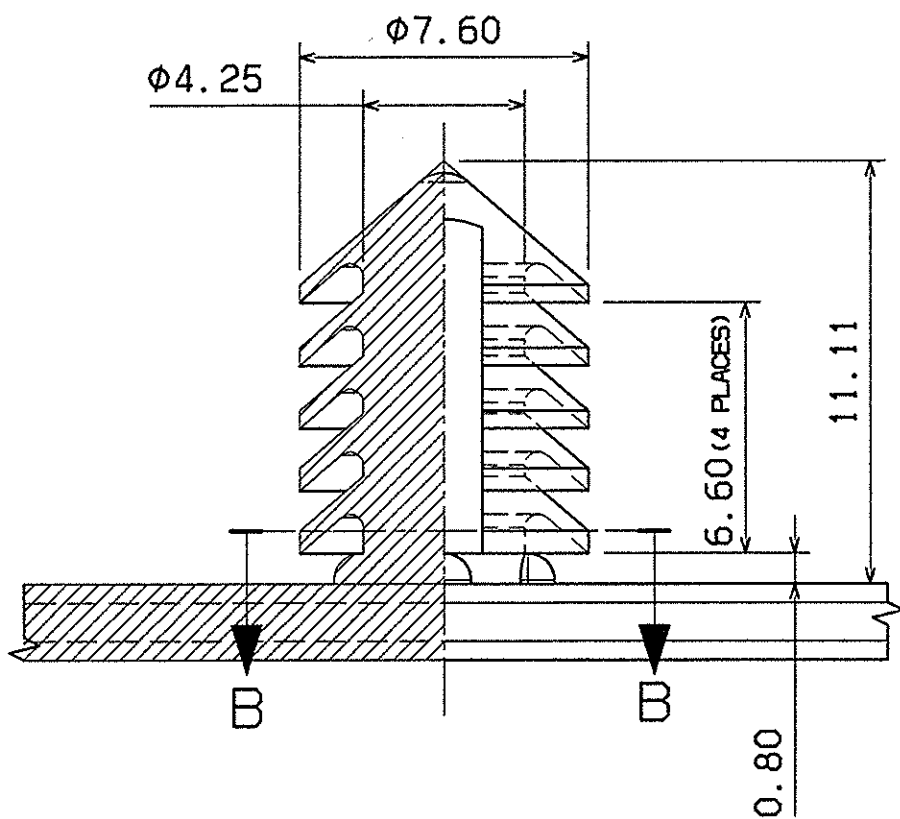

SEC. A-A (5/1)

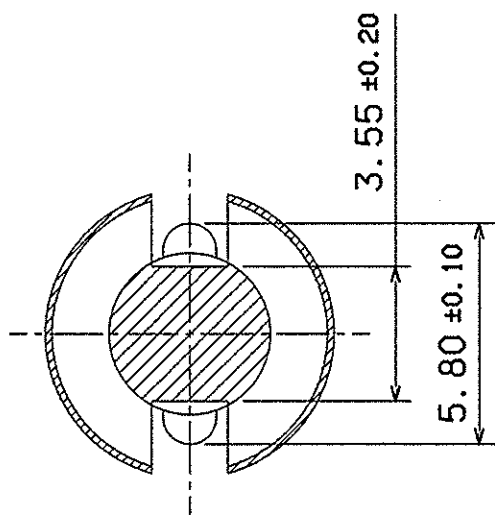

SEC. B-B (5/1)

© 2016 YAZAKI NORTH AMERICA, INC. ALL INFORMATION ON THIS DRAWING IS THE PROPRIETARY AND CONFIDENTIAL PROPERTY OF YNA AND SHALL NOT BE DISCLOSED, DUPLICATED OR DISTRIBUTED WITHOUT THE EXPRESS WRITTEN CONSENT OF YNA. ALL RIGHTS RESERVED.											
CUSTOMER										PART NUMBER	
CUSTOMER PART NO. N/A										TREAT. & FIN. NONE	
OFFICE YNA										NAME CLIP - WIRING BEND	
VENDOR X39947-A816										02 DR	
VENDOR NO.											
DWG TYPE R										PART NO. 7047-1647	
DWG SOURCE NEW										DWG NO. 7047-1647:R	
DWG DATE 04/13/16										YAZAKI CORPORATION	
UNIT mm											
SCL 2/1											
ANGLE 3											
APPROVED											
CHECKED											
J. TOMLIN											
05/04/16											
4/28/16											
09/21/00											
7/29/16											

GENERAL TOLERANCE							
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1
(C)	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15
SPECIFIED						MASS	1.52g

LET	DATE	REVISION RECORD	NO.	CHKD
	04/13/16	NEW	C16-A338	BM