



1

2

3




YAZAKI PART NO.	MATERIAL	A	B	C	D	E	APPLICABLE WIRE SIZE
7116-2641	BRASS t=0.32	3.50	3.70	4.90	5.50	1.10	△ AVSS 0.75~AVS 2 EQUIVALENT
7116-2642	BRASS t=0.32	4.50	4.70	5.90	6.50	1.40	△ AVS 3

F ← G ←

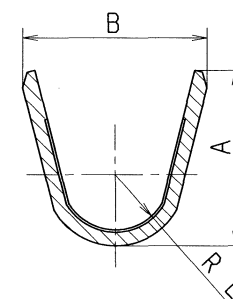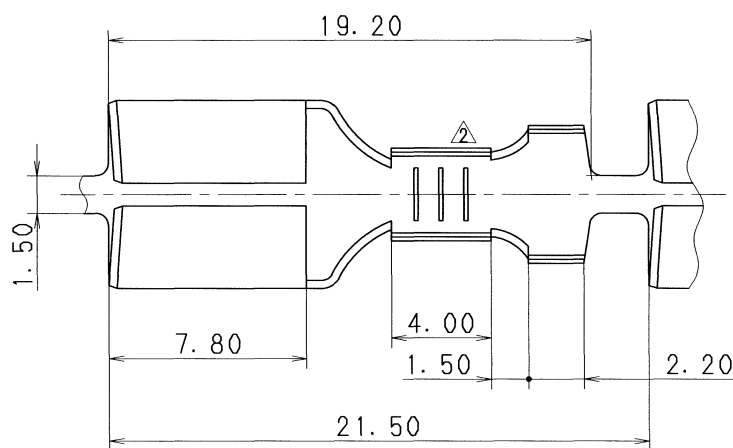

SEC. F-F (10/1)

F ← G ←

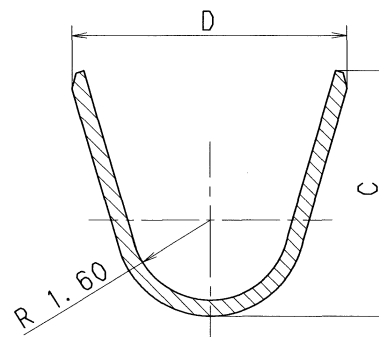

SEC. G-G (10/1)

SEC. 6 - G (10717)										ISSUE MARK					
△	08.04.24	CHANGED WIRE SIZE	C08-Z290	T. S	CUSTOMER					MATL. SPEC.		TREAT. & FIN.			
△	97.06.05	CHANGED FORM & ELIMINATE PART NO.	C97-M053	M. Y	CUSTOMER PART NO.			CUSTOMER DWG NO.			SEE TABLE				
△	93.03.12	ADDED PART NO.	C93-6324	I. I						NAME △ CONNECTOR LOCKING FINGER					
	88.10.18	NEW	8MC-3238	T. M	OFFICE			TRIAL PART NO.			TYPE 250 TERMINAL FEMALE				
LET	DATE	REVISION RECORD	NO.	CHKD	VENDOR										
GENERAL TOLERANCE					VENDOR NO.										
	10MAX	50MAX	100MAX	250MAX	250OVR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	PART NO.	
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW	88.10.13	mm	5/1	3	CH. CODE △ 7116-2641 ETC.	
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN		DWG NO. △ 7116-2641:R	
©	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15	高 物			TAKENOUCHI		J. GALLARES		SET DWG NO.
SPECIFIED					MASS			08.04.25			82.06.23		08.04.24		YAZAKI CORPORATION

1

2

3