PART NO. AND CH. CODE	②W_1±0.4	②W_2±0.4	H_1	H_2	X	WIRE SIZE	MATERIAL
7116-4035	2.90	5.40	②(2.62)	②(4.52)	0.40	AVS 0.3~AVS 0.5 EQUIVALENT	C2600 (t=0.40) TIN PLATING
7116-4036	3.60	5.70	②(3.34)	②(4.38)	0.60	AVS 0.5~AVS 1.25 EQUIVALENT	C2600 (t=0.40) TIN PLATING
7116-4037	4.90	6.90	②(4.63)	②(5.42)	0.80	AVS 2~AVS 3 ③AVX 3 EQUIVALENT	②COPPER ALLOY (t=0.40) TIN PLATING

注記

1. かん合相手品番： 7114-4035 ETC.
2. ②適用ゴム栓品番： 7158-3014-90 ETC.

NOTES

1. MATING PART NO. : 7114-4035 ETC.
2. ② APPLICABLE RUBBER STOPPER NO. : 7158-3014-90 ETC.

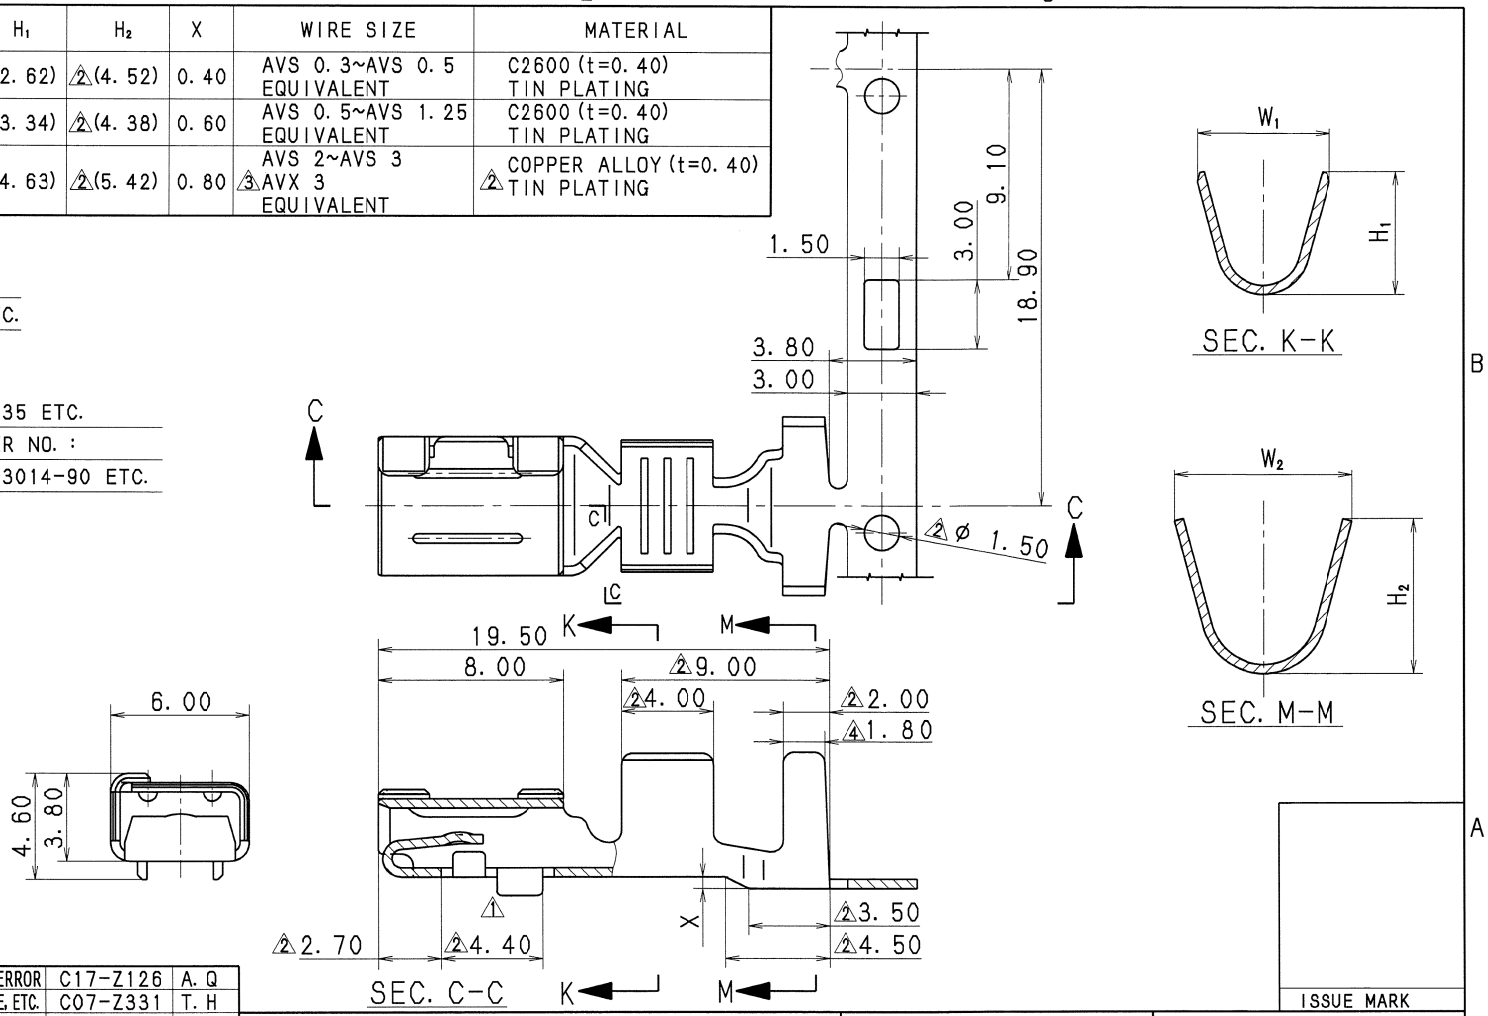

LET	DATE	REVISION RECORD	NO.	CHKD
④	2017/03/30	CORRECTION OF CLERICAL ERROR	C17-Z126	A. Q
③	2007/04/19	CHANGED APPLICABLE WIRE SIZE, ETC.	C07-Z331	T. H
②	1998/07/18	CHANGED DIMENSION, MATERIAL & ADDED NOTE	C97-N462	H. K
①	1990/03/06	CHANGED FORM	C90-L254	K. O
	1989/10/11	NEW	C89-M089	H. Y

ISSUE MARK

GENERAL TOLERANCE

	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30′	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30′	0.1
Ⓒ	±0.3	±0.5	±0.8	±1.4	±2	±30′	0.15

SPECIFIED

MASS g

CUSTOMER

CUSTOMER PART NO. | CUSTOMER DWG NO.

OFFICE | TRIAL PART NO.

VENDOR

VENDOR NO.

DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	NEW	1989/10/24	mm	②5:1	3

APPROVED	CHECKED	CHECKED	DESIGN	DRAWN
S. SUZUKI	S. ONODA	———	SUEYOSHI	A. QUIROL
2017/03/30	2017/03/30	———	1987/03/04	2017/03/30

MATL. SPEC. SEE TABLE

TREAT. & FIN.

NAME ③4.8 SEALED TERMINAL FEMALE

PART NO. CH. CODE 7116-4035 ETC.

DWG NO. 7116-4035:R

SET DWG NO.

YAZAKI CORPORATION