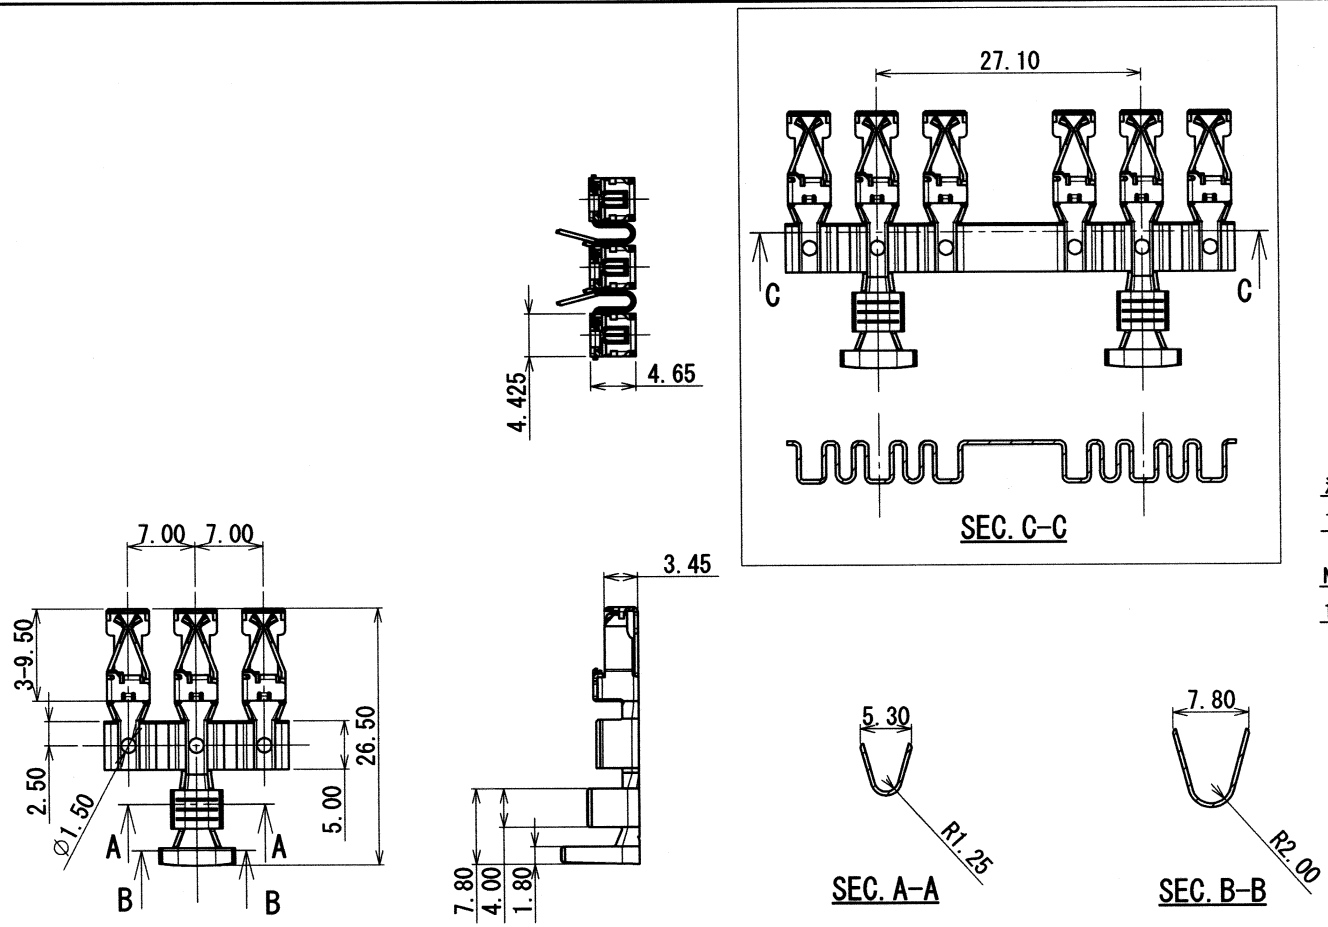

注記

1. 適用電線ｻｲｽﾞ:HF 3sq～AVS 5sq

NOTE

1. APPLICABLE WIRE SIZE:HF 3sq～AVS 5sq

ISSUE MARK

LET	DATE	REVISION RECORD	NO.	CHKD
	04/02/23	NEW	C04-X163	Y.S

GENERAL TOLERANCE

	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1
Ⓒ	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15

SPECIFIED

MASS g

CUSTOMER

CUSTOMER PART NO. | CUSTOMER DWG NO.

OFFICE | TRIAL PART NO.

VENDOR

VENDOR NO.

DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	NEW	04/02/23	mm	2:1	3

APPROVED	CHECKED	CHECKED	DESIGN	DRAWN
石河	—	原田	T.HARADA	NARITA 新倉
04.02.27	—	04/02/26	02/09/25	04/02/23

MATL. SPEC. COPPER ALLOY (t=0.4)

TREAT. & FIN. TIN PLATING

NAME LOW HEIGHT MINI FUSE TERMINAL 3WAY-L

PART NO. CH. CODE 7126-8864-02

DWG NO. 7126-8864-02:R

SET DWG NO.

YAZAKI CORPORATION