

2


3

TABLE 1 YAZAKI SUB ASSEMBLY PART NO.

7219-3320 ETC.	NO.	YAZAKI PART NO.	MATERIAL	COLOR	QTY.
	①	SEE TABLE 2	PBT	SEE TABLE 2	1
	②	SEE TABLE 2	PBT	SEE TABLE 2	1
	③	7137-1230	SILICONE RUBBER	RED IRON	1

TABLE 2 YAZAKI SUB ASSEMBLY PART NO.

YAZAKI SUB ASSEMBLY PART NO.	YAZAKI HOUSING PART NO.	YAZAKI LOCK PART NO.	COLOR
7219-3320	7119-3320	7157-8673	NATURAL
7219-3320-10	7119-3320-10	7157-8673-10	DARK GRAY
7219-3320-20	7119-3320-20	7157-8673-20	VIOLET
7219-3320-30	7119-3320-30	7157-8673-30	BLACK
7219-3320-40	7119-3320-40	7157-8673-40	LIGHT GRAY
7219-3320-50	7119-3320-50	7157-8673-50	ORANGE
7219-3320-60	7119-3320-60	7157-8673-60	GREEN
7219-3320-70	7119-3320-70	7157-8673-70	YELLOW
7219-3320-80	7119-3320-80	7157-8673-80	BROWN
7219-3320-90	7119-3320-90	7157-8673-90	BLUE

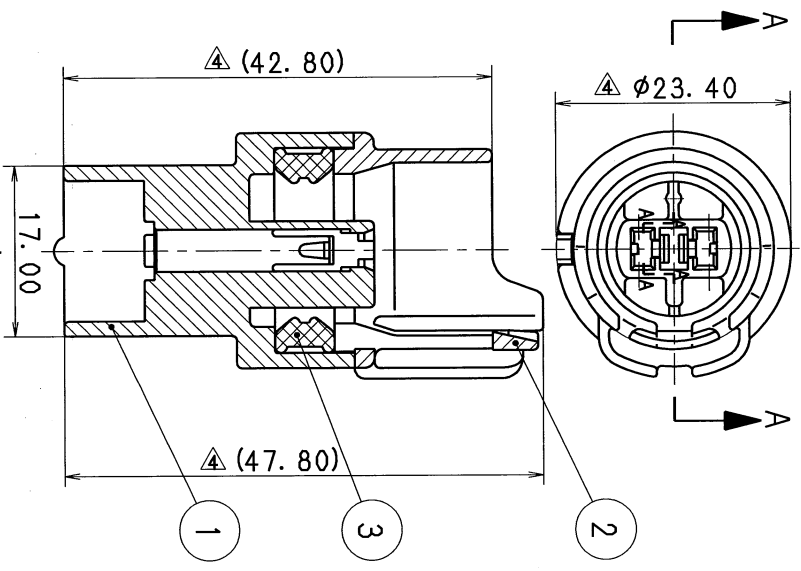

SEC. A-A

VIEW C

1. 取扱説明書 No. : YPES-15-041
1. 取扱説明書 No. : YPES-15-041

1. HANDLING MANUAL NO. : YPES-15-041

12. 05. 10	ADDED GENERAL TOLERANCE ETC.	C12-Z447	J. B
97. 06. 17	CAD DRAWN & ADDED PART NO.	C97-M139	M. T
88. 04. 21	色品追加	8MC-0450	山本
86. 04. 28	形状変更及び公差変更	C86-5484	近藤
82. 11. 01	NEW	C82-3023	山田
LET	DATE	REVISION RECORD	NO. CHKD
GENERAL TOLERANCE			
A	10MAX	50MAX	100MAX
B	±0.15	±0.2	±0.3
C	±0.2	±0.3	±0.5
D	±0.3	±0.5	±1.4
E	±0.5	±1.4	±2
F	±1.4	±2	±30'
G	±2	±30'	0.15
H	±30'	0.15	MASS
I	±0.15	MASS	9

CUSTOMER	CUSTOMER PART NO.	CUSTOMER DWG NO.
OFFICE	TRIAL PART NO.	
VENDOR		
VENDOR NO.		
DWG TYPE	DWG SOURCE	DWG DATE UNIT
R	NEW	80. 06. 10
APPROVED	CHECKED	DESIGN
M. FUKUDA	Y. SASAKI	T. KATO
12. 05. 10	12. 05. 10	12. 05. 10

MATL. SPEC.	SEE TABLE 1	TREAT. & FIN.	ISSUE MARK
NAME	B. S. HOUSING 2P		
SUB ASSEMBLY FEMALE			
PART NO.	7219-3320 ETC.		
DWG NO.	7219-3320:R	SET DWG NO.	
YAZAKI CORPORATION			

2

3