



- 1
- 注記
- 1) 適用端子品番 : 7116-1466-08 (7B16-1466-08)
- 2) 適用工口品番 : 7116-1466-02 (7B16-1466-02)
- 3) 適用防水品番 : 7158-3121-80 (7B58-3121-80)
- 4) 適用防水品番 : 7157-3992-90 (7B57-3992-90)
- 5) 適用防水品番 : 7282-7395-70 (7C82-7395-70)
- 6) () 内品番は、エア・バグ (A/B) 回路及び特別管理回路に使用する場合に適用すること。


SUB ASSEMBLY PART NO. AND CH. CODE		NO.	PART NO. AND CH. CODE	MATERIAL	COLOR	QTY.
7283-7399-70, [A] (7C83-7399-70, [A])		①	7183-7395-70 (7B83-7395-70)	PBT	YELLOW	1
		②	7158-5562 (7B58-5562)	HPA	NATURAL	1
		③	7137-2810-80 (7B37-2810-80)	SILICONE RUBBER	BROWN	1
		④	7144-1687 (7B44-1687)	STAINLESS STEEL		2

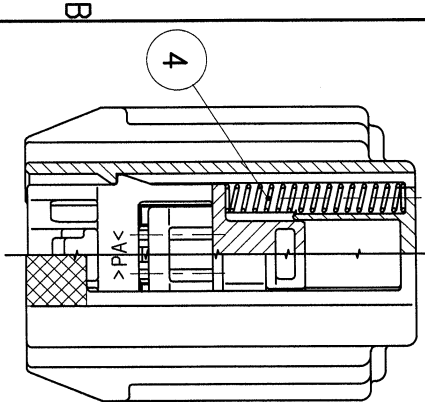

SEC. B-B

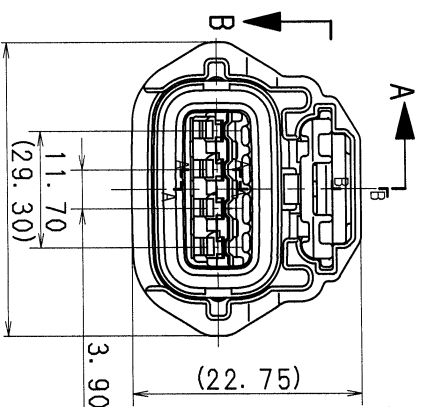

SEC. A-A

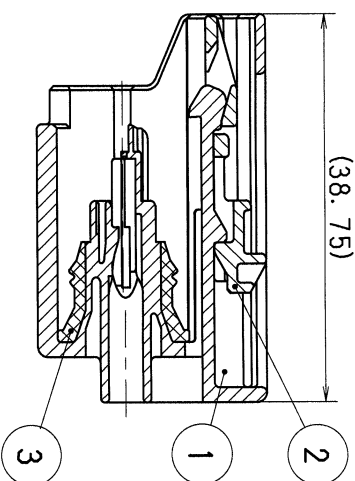

NOTES

- 1) APPLICABLE TERMINAL NO. : 7116-1466-08 (7B16-1466-08)
- 2) APPLICABLE SEAL RUBBER NO. : 7158-3121-80 (7B58-3121-80)
- 3) APPLICABLE RUBBER STOPPER NO. : 7157-3992-90 (7B57-3992-90)
- 4) MATING PART NO. : 7282-7395-70 (7C82-7395-70)
- 5) APPLICABLE FRONT HOLDER NO. : 7158-5561 (7B58-5561)
- 6) PART NUMBERS IN PARENTHESIS SHALL BE USED FOR AIR BAG (A/B) CIRCUITS AND OTHER CIRCUITS DESIGNATED FOR SPECIAL MONITORING.

01.07.04		NEW, [A]		C01-X613		H. Y		OFFICE		CUSTOMER		CUSTOMER PART NO.		CUSTOMER DWG NO.		MATERIAL SPEC.		SEE TABLE		TREAT. & FIN.		ISSUE MARK	
LET DATE		REVISION RECORD		NO.		CHKD		VENDOR		VENDOR NO.		TRIAL PART NO.		NAME		SUB ASSEMBLY FEMALE		AIR BAG CONNECTOR RK-TYPE 4P		SUB ASSEMBLY FEMALE		YAZAKI CORPORATION	
10MAX 50MAX 100MAX 250MAX 2500V		ANGLE		ECCENT		DWG TYPE		DWG SOURCE		DWG DATE		UNIT		SCL		ANGLE		PART NO.		7283-7399-70, [A] (7C83-7395-70, [A])		CH. CODE	
A ±0.15 ±0.2 ±0.3 ±0.5 ±0.75 ±30°		0.1		APPROVED		CHECKED		CHECKED		DESIGN		DRAWN		DWG NO.		7283-7399-70:R		SET DWG NO.					
B ±0.2 ±0.3 ±0.55 ±0.95 ±1.4 ±2		0.1		H		H		H		H		H		KASHIYAMA M. IREDAI									
C ±0.3 ±0.5 ±0.8 ±1.4 ±2		0.15		H		H		H		H		H		KASHIYAMA M. IREDAI									
SPECIFIED		MASS		g		01.08.08		01.08.07		99.10.29		01.08.07											

1

2

3