

1607255

https://www.phoenixcontact.com/us/products/1607255

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Coupler connector, straight, Screw locking mechanism, M23, number of positions: 12, contact connection type: Pin, shielded: yes, degree of protection: IP67, cable diameter range: 5 mm ... 13.2 mm, number of positions: 12, connection method: Crimp connection, series: RF, This product is in the process of being discontinued. This product must no longer be considered for new projects. Please contact your sales representative for alternatives.

### Commercial data

Item number	1607255
Packing unit	20 pc
Minimum order quantity	1 pc
Sales key	AB31
Product key	ABRAGG
GTIN	4046356174817
Weight per piece (including packing)	97.97 g
Weight per piece (excluding packing)	93.697 g
Customs tariff number	85366990
Country of origin	DE



1607255

https://www.phoenixcontact.com/us/products/1607255

### Technical data

Order information:

#### Notes

Pr	Product properties		
	Product type	Circular connector (cable-side)	
	Series	RF	
	Application	Feedback, signal	
		Signal	
	Number of positions	12	
	Connection profile	12	
	Shielded	yes	

Ν

M23

Order crimp contacts Ø 1 mm separately

### Material specifications

Coding

Thread type

Material Housing	GD-Zn
Material Rotating parts	CuZn
Material Housing surface	Ni
Material Insulating body	PA 6.6
Material Seal	FPM (O-ring)
Seal material	FPM

### Connection data

Conductor connection

|--|

### Electrical properties

#### Contact

Contact diameter	1 mm
Nominal current I <sub>N</sub>	8 A
Nominal voltage U <sub>N</sub>	48 V AC
	74 V DC
Overvoltage category	III
Degree of pollution	3
Rated surge voltage	1.5 kV

### Connector

Туре	straight
Direction of rotation	Counter direction

### Cable/line



1607255

https://www.phoenixcontact.com/us/products/1607255

	External cable diameter	5 mm 13.2 mm
En	vironmental and real-life conditions	
	Ambient conditions	
	Degree of protection	IP67
	Ambient temperature (operation)	-40 °C 125 °C
	Altitude	2000 m




https://www.phoenixcontact.com/us/products/1607255




### Drawings

Dimensional drawing

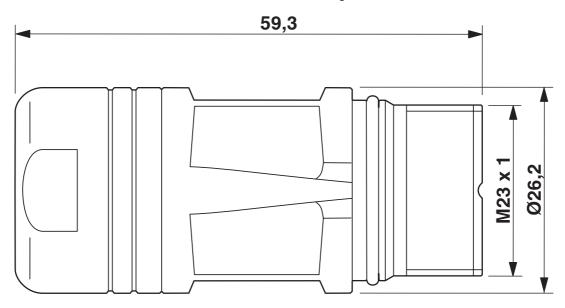

RF-12(17)...N8A90DU

Dimensional drawing

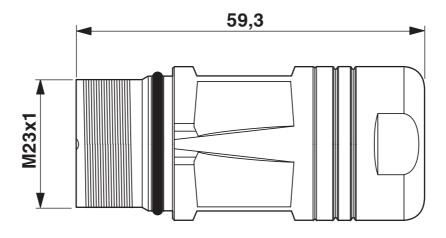


Dimensional drawing



https://www.phoenixcontact.com/us/products/1607255



Schematic diagram

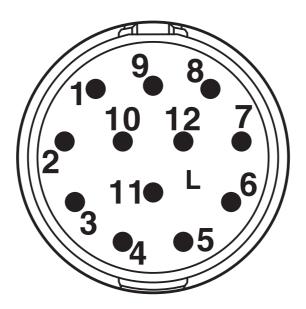

Connector pin assignment



1607255

https://www.phoenixcontact.com/us/products/1607255

### **Approvals**

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1607255

cUL Recognized Approval ID: E153698-20090723					
	Nor	minal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
keine					
	48 \	V	5 A	20	-

<b>7.</b> 1	UL Recognized Approval ID: E153698-20090723			
	Nominal voltage $U_N$	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
keine				
	48 V	5 A	20	-



1607255

https://www.phoenixcontact.com/us/products/1607255

### Classifications

### **ECLASS**

	ECLASS-13.0	27440116
	ECLASS-15.0	27440116
ΕΊ	ГІМ	
	ETIM 9.0	EC002635
U	NSPSC	
	UNSPSC 21.0	39121400



1607255

https://www.phoenixcontact.com/us/products/1607255

### Environmental product compliance

#### EU RoHS

Yes				
6(c)				
China RoHS				
EFUP-50				
An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.				
Lead(CAS: 7439-92-1)				
cc4b3a3f-30f9-45bc-9e06-828530548fdf				

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com