

2903532

https://www.phoenixcontact.com/us/products/2903532

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable sharing module, two RJ45 jacks with Ethernet assignment (cable outlet on the front) to 8 spring-cage connection terminal blocks, CAT5e, 10/100 Mbps, DIN rail mounting, IP20, option of shield contacting on DIN rail via jumpers

Product description

Ethernet patch panels enable quick and easy connection between the field cabling and control cabinet cabling. The passive termination panels are a convenient alternative to the on-site assembly of RJ45 connectors.

Your advantages

- · Safe shield connection to ground potential
- CAT5e
- 10/100 Mbps
- · Mounting on a DIN rail
- · Cable sharing adapter
- · Y adapter
- · Easy use of one cable for various services
- · Optional shield connection via jumpers

Commercial data

Item number	2903532
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DN07
Product key	DNC331
GTIN	4046356746748
Weight per piece (including packing)	93.2 g
Weight per piece (excluding packing)	64.3 g
Customs tariff number	85366990
Country of origin	US



https://www.phoenixcontact.com/us/products/2903532



Technical data

Notes

Note on application

Product properties

Product type	Patch panel	
Insulation characteristics: Air clearances and creepage distances		
Insulation	Basic insulation	
Overvoltage category	II	
Pollution degree	2	

Electrical properties

Air clearances and creepage distances

Rated insulation voltage	50 V
Rated surge voltage	0.5 kV

Interfaces

Data: Ethernet interface, 10/100/1000Base-T(X) in accordance with IEEE 802.3

Serial transmission speed	10/100 Mbps
Connection method	Spring-cage connection
No. of channels	1
Pin assignment	1, 2, 3, 6
	4, 5, 7, 8
Transmission length	100 m (including patch cables)
Single conductor/terminal point, rigid	0.2 mm ² 1.5 mm ²
Single-wire/terminal point, flexible	0.2 mm ² 1 mm ²
Single-wire/terminal point, rigid AWG max.	16
Single-wire/terminal point, rigid AWG min.	24

Data: Ethernet interface, 10/100/1000Base-T(X) in accordance with IEEE 802.3

Connection method	RJ45 CAT5e
No. of channels	1
Pin assignment	1, 2, 3, 6
	1, 2, 3, 6

Dimensions

Width	52 mm
Height	90 mm
Depth	51 mm



2903532

https://www.phoenixcontact.com/us/products/2903532

Material specifications

	Color (Housing)	green (RAL 6021)
Са	ble/line	
	External cable diameter	6 mm 10 mm
	Cable impedance	100 Ω

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≤ 750

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-10 °C 50 °C

Approvals

Corrosive gas test

Identification	ISA-S71.04-1985 G3 Harsh Group A

Standards and regulations

Air clearances and creepage distances

Standards/regulations	DIN EN 50178

Mounting


Mounting type	DIN rail mounting
Mounting position	any



https://www.phoenixcontact.com/us/products/2903532




Drawings

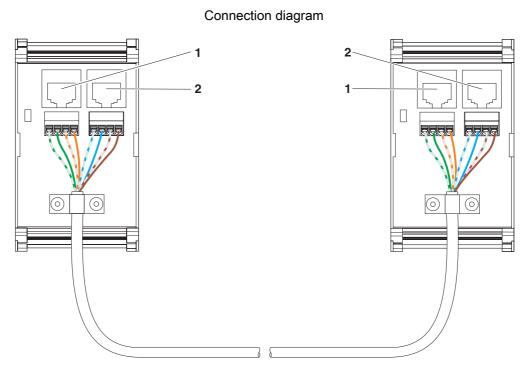

Device connections

Circuit diagram

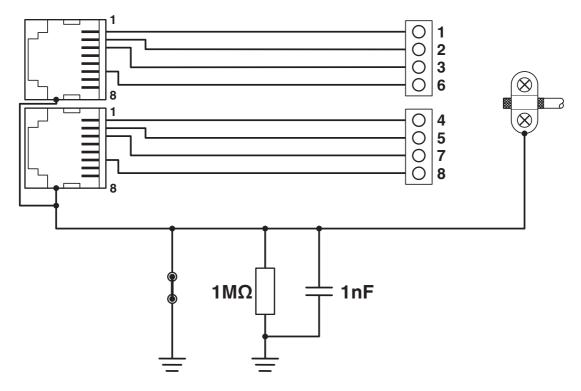


Circuit diagram



https://www.phoenixcontact.com/us/products/2903532




Circuit diagram



Shield connection direct to PE

Circuit diagram

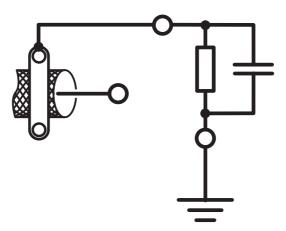


Shield connection to PE via RC element



https://www.phoenixcontact.com/us/products/2903532



Circuit diagram





2903532

https://www.phoenixcontact.com/us/products/2903532

Classifications

ECLASS

	ECLASS-13.0	19170112		
	ECLASS-15.0	19170112		
ETIM				
	ETIM 9.0	EC001128		
UN	ISPSC			

UNSPSC 21.0 43223300



2903532

https://www.phoenixcontact.com/us/products/2903532

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2025 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com