

1595813

https://www.phoenixcontact.com/us/products/1595813

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Cable connector, series: RC, straight, shielded: no, Screw locking mechanism, No. of pos.: 8+1, Direction of rotation: Standard, contact connection type: Socket, Solder cup, coding: N

Commercial data

Item number	1595813
Packing unit	20 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Product key	ABRAFA
GTIN	4046356208376
Weight per piece (including packing)	96.73 g
Weight per piece (excluding packing)	96.73 g
Country of origin	DE



https://www.phoenixcontact.com/us/products/1595813



Technical data

Product properties

Product type	Circular connector (cable side)
Product type	Circular connector (cable-side)

Connector

Insulating body

Coding	N
Contact material	CuZn
Contact surface material	Ni/Au
Insertion/withdrawal cycles	50
Connection method	Solder cup
Contact switching type	Socket
Application	Signal
Number of positions	9
Direction of rotation	Standard
Connection profile	8+1
Number Contact (Contact group 1)	1
Diameter Contact (Contact group 1)	2 mm
Litz wire cross-section min. Contact (Contact group 1)	0.08 mm²
Litz wire cross-section max. Contact (Contact group 1)	2.5 mm²
Rated current Contact (Contact group 1)	20 A (for max. connection cross section)
Rated voltage Contact (Contact group 1)	48 V AC
	74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3
Number Contact	8
Diameter Contact	1 mm
Litz wire cross-section min. Contact	0.08 mm²
Litz wire cross-section max. Contact	1 mm²
Nominal current per signal contact	8 A
Rated voltage Contact	48 V AC
	74 V DC

Housing

riousing	
Thread type	M23
Type of locking	Screw locking mechanism
Pg screw connection	Pg9
Housing material	GD-Zn
Degree of protection (plugged in)	IP65
	IP67
	IP68




https://www.phoenixcontact.com/us/products/1595813



Drawings

Schematic diagram

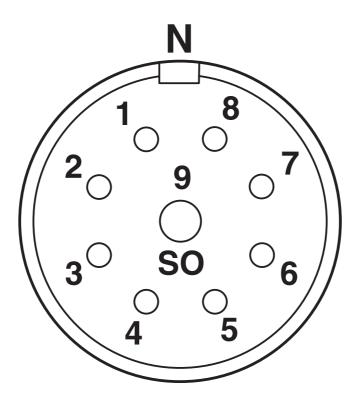


Connector pin assignment



https://www.phoenixcontact.com/us/products/1595813



Schematic diagram

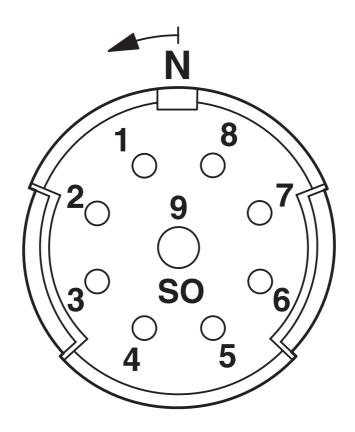


Connector pin assignment



https://www.phoenixcontact.com/us/products/1595813



Schematic diagram

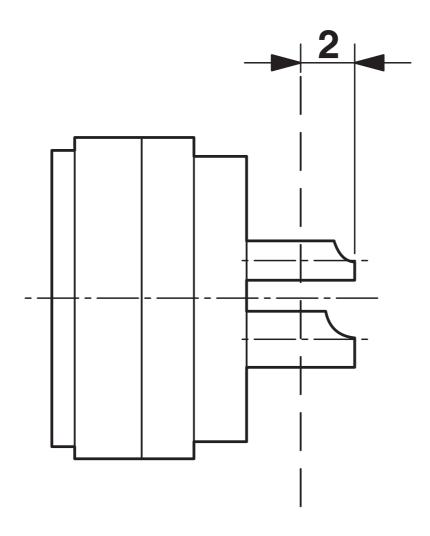

Dimensional drawing



1595813

https://www.phoenixcontact.com/us/products/1595813

Classifications

UNSPSC

UNSPSC 21.0 39121413



1595813

https://www.phoenixcontact.com/us/products/1595813

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements Exemption	Yes 6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com